

Cell Box Prime

T-Mobile SIM Card
Included at No Charge
For easy activation.

RANGE

Access Control

BFT CELLULAR CALL BOX


BFTCELL-PRIME

BFTCELL-PRIME-NK

BFTCELL-PRIME-E



- BUILT IN TIME CLOCK CONTROL. **NEW**
- REMOTELY PROGRAM YOUR KEYPAD CODES BY APP. **NEW**
- AUTOMATIC 7 DAY OPEN/CLOSE CONTROL BY APP. **NEW**
- ACTIVITY LOG (SEE WHO OPENED YOUR GATES AND WHEN). **NEW**
- ACCESS YOUR PROPERTY BY TELEPHONE, CALLER ID (KNOWN NUMBER), SMS, OR PIN CODE.
- 15V D.C POWER SUPPLY ADAPTOR INCLUDED.
- BUILT-IN ILLUMINATED KEYPAD WITH 200 CODES, 20 TIME ZONE CODES, 30 TEMPORARY CODES.
- 100 REGISTERED CALLER ID USERS.
- GET A CALL FROM YOUR CELLBOX ANYWHERE IN THE WORLD.
- THREE YEAR LIMITED WARRANTY.

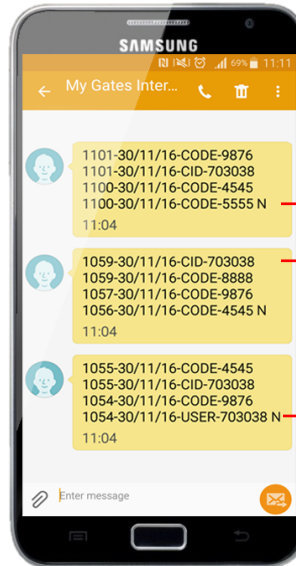

CODE: Keypad code used, with date and time!

CID: Caller ID user with last 6 digits of phone number shown!

USER: Home user, opened their gates at this time and date.



BFT Americas, Inc.
6100 Broken Sound Parkway N.W.
Boca Raton, FL 33487

T: +1 561 995 8155

T: US. 1877 995 8155

➔ info.bft@bft-usa.com

➔ www.bftaccess.com

➔ www.bftautomation.com




Cell Box Prime




PHYSICAL MEASUREMENTS

BFTCELL-PRIME

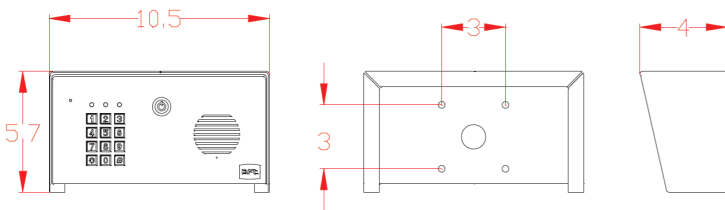

BFTCELL-PRIME-E

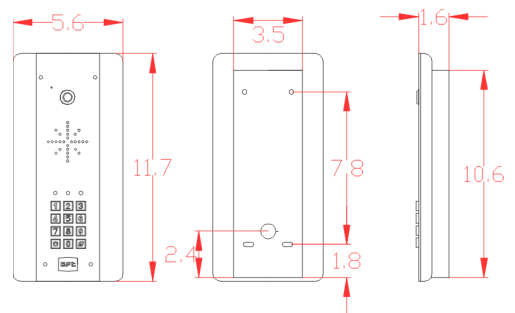

TECHNICAL DATA

BFTCELL-PRIME

BFTCELL-PRIME-NK

BFTCELL-PRIME-E

GENERAL:

Voltage: 15v dc
 Recommended cable @ 25 feet: 14 gauge
 Solar compatible: Yes
 Current on standby: Operating 55mA
 Current: 330mA
 Peak Demand Current: Internal Fuse 2 Amps
 Rating: 500mA quick blow

CELLULAR MODULE:

Relays: 2 relays, max 2 amps, 24v ac/dc load
 Latching: Yes
 Caller ID users: 100
 Programming: SMS & APP
 Network compatibility: AT&T, T-Mobile

KEYPAD CODES:

Standard codes: 200
 Time zoned codes: 20
 Temporary codes: 30



BFT Americas, Inc.
 6100 Broken Sound Parkway N.W.
 Boca Raton, FL 33487

T: +1 561 995 8155

T: US. 1877 995 8155

➔ info.bft@bft-usa.com

➔ www.bftaccess.com

➔ www.bftautomation.com