

Product Overview

SIX+ BAR S	SIX+ BAR L	SIX+ PAR S	SIX+ PAR L
SOURCE • 6x 20W RGBLA+UV LED Engine • 30,000 Hour Average LED Life*	SOURCE • 12x 20W RGBLA+UV LED Engine • 30,000 Hour Average LED Life*	SOURCE • 7x 20W RGBLA+UV LED Engine • 30,000 Hour Average LED Life*	SOURCE • 14x 20W RGBLA+UV LED Engine • 30,000 Hour Average LED Life*
PHOTOMETRIC DATA • 4435 Total Lumen Output • CRI - 90.9	PHOTOMETRIC DATA • 9325 Total Lumen Output • CRI - 92.3	PHOTOMETRIC DATA • 4570 Total Lumen Output • CRI - 91.7	PHOTOMETRIC DATA • 7300 Total Lumen Output • CRI - 91.7
EFFECTS • Full Pixel Control • Electronic Dimmer and Strobe • Variable 16-bit Dimming Modes and Curves	EFFECTS • Full Pixel Control • Electronic Dimmer and Strobe • Variable 16-bit Dimming Modes and Curves	EFFECTS • Electronic Dimmer and Strobe • Variable 16-bit Dimming Modes and Curves • Integrated Lens Holder	EFFECTS • Electronic Dimmer and Strobe • Variable 16-bit Dimming Modes and Curves • Integrated Lens Holder
COLOR • RGBLA+ UV Color Array • CMY Emulation • Variable CCT 2,400K - 8,500K • Virtual Gel Swatch Book	COLOR • RGBLA+ UV Color Array • CMY Emulation • Variable CCT 2,400K - 8,500K • Virtual Gel Swatch Book	COLOR • RGBMA+ UV Color Array • CMY Emulation • Variable CCT 2,400K - 8,500K • Virtual Gel Swatch Book	COLOR • RGBMA+ UV Color Array • CMY Emulation • Variable CCT 2,400K - 8,500K • Virtual Gel Swatch Book
SIZE / WEIGHT • LxWxH: 501 x 176 x 206 mm • Weight: 6.75 kg	SIZE / WEIGHT • LxWxH: 1000 x 175.5 x 206.4 mm • Weight: 10.9 kg	SIZE / WEIGHT • LxWxH: 188 x 247.1 x 230 mm • Weight: 4.3 kg	SIZE / WEIGHT • LxWxH: 260 x 342 x 246.5 mm • Weight: 7.1 kg

SIX+ PANEL

SOURCE • 40x 40W RGBLA+UV LEDs • 30,000 Hour Average LED Life*
PHOTOMETRIC DATA • 46,625 (Integrating Sphere) • CRI- 92.3 • TLCI- 83 • Beam Angle: 15° • Field Angle: 25°
EFFECTS • 2x5 Cell Pixel Control • Prebuilt & Custom Standalone Effect Sequences • Electronic Dimmer and Strobe • Variable 16-bit Dimming Modes and Curves
COLOR • RGBLA+ UV Color Array • CMY Emulation • Variable CCT 2400K - 8500K • Dim-to-Warm Fade • Virtual Gel Swatch Book
SIZE / WEIGHT • LxWxH: 239 x 509 x 391.5 mm • Weight: 20.4 kg



Elation Professional Europe
Junostraat 2 • 6468 EW Kerkrade • The Netherlands
www.elationlighting.eu


*Test lab conditions. May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming. Specifications subject to change without notice.





SIX+ BAR S

6x 20W RGBLA+UV LED Bar
1/2 meter

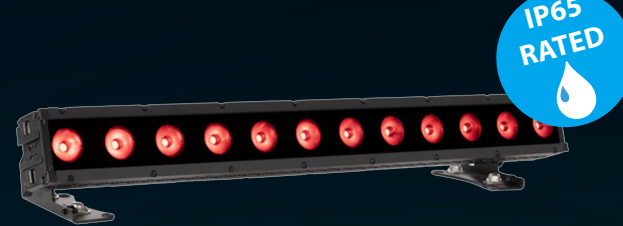

SIX+ BAR L

12x 20W RGBLA+UV LED Bar
1 meter

Unleash the full potential of LED batten lighting and ignite your creative spark with the new SIX+ BAR! The SIX+ BAR represents an innovative line of creative LED batten solutions that harmonizes the latest in LED color technology with versatile design for greater artistic expression.



SIX+ PAR S

7x 20W RGBLA+UV LED Par



SIX+ PAR L

14x 20W RGBLA+UV LED Par

Welcome to the next phase of lighting innovation with the SIX+ Series, cutting-edge upgrades to the SixPar and SixBar series and a leap forward in LED workhorse PAR and Bar fixtures. Each unit, powered by 20W RGBLA+UV LEDs, is a testament to compact efficiency and unparalleled color richness, offering an expansive spectrum and outstanding light quality.



SIX+ PANEL

40x 40W RGBLA+UV LED Array




SIX+ PANEL BATTERY PLATE

14.4V, Battery Life: >8hr


Designed for modern lighting design, the SIX+ PANEL combines refined color quality, powerful output, and flexible deployment in a single, durable fixture.

CUTTING-EDGE UPGRADE TO INDUSTRY-STANDARD SIXPAR/SIXBAR COLOR CHANGERS


- + WIDER COLOR SPECTRUM: RGBLA+UV LEDS**
- + BETTER LIGHT QUALITY: HIGH CRI, HOMOGENIZED COLOR BLENDING**
- + GREATER OUTPUT: >7000 LUMENS**
- + VARIABLE CCT CONTROL: 2400K - 8500K**
- + SILENT OPERATION: FANLESS COOLING**
- + EMULATION MODE: SEAMLESS INTEGRATION WITH ORIGINAL SIXPAR / SIXBAR**
- + END-TO-END INTERCONNECTION (SIXBAR ONLY)**
- + INDOOR/OUTDOOR: IP65 (C4-M MARINE GRADE COATING)**



7.5" Barndoor
Compatible with SIX+ PAR S,
LIMELIGHT PAR S and KL PAR FC



10" Barndoor
Compatible
with SIX+ PAR L



Barndoor
For
LIMELIGHT PAR L



SIX+ GFK
Gel Frame Holder and
Front Bumper



BAR Black Lens
Compatible
with SIX+, and PULSE BAR



SIX+ XFL
Extra-wide flood Lens
100°




SIX+ WFL
Wide flood Lens
60°



SIX+ L140
1" x 40°



SIX+ L1060
10" x 60°



BAR Frost Lens
Compatible
with SIX+, and PULSE BAR