




Quick Start Guide



04BXLPM




1 Package



2 Overview

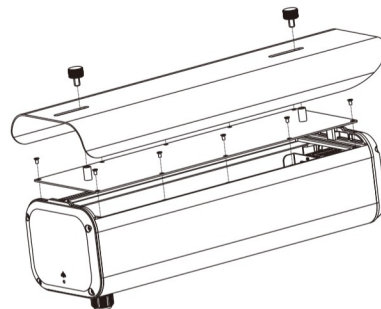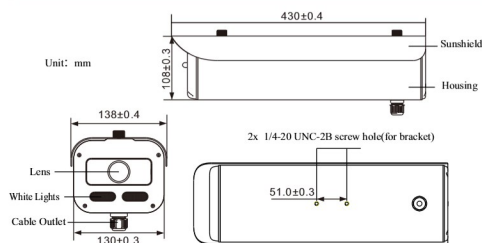


Unscrew the sunshield and then remove the upper cover of the housing as shown above.

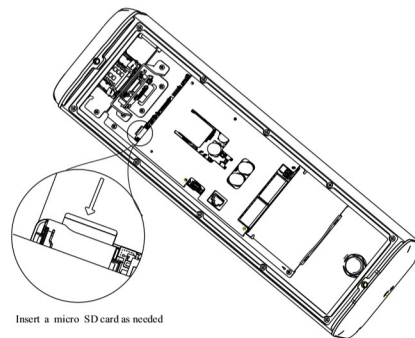


Insert a micro SD card as needed

3 Cable Connection

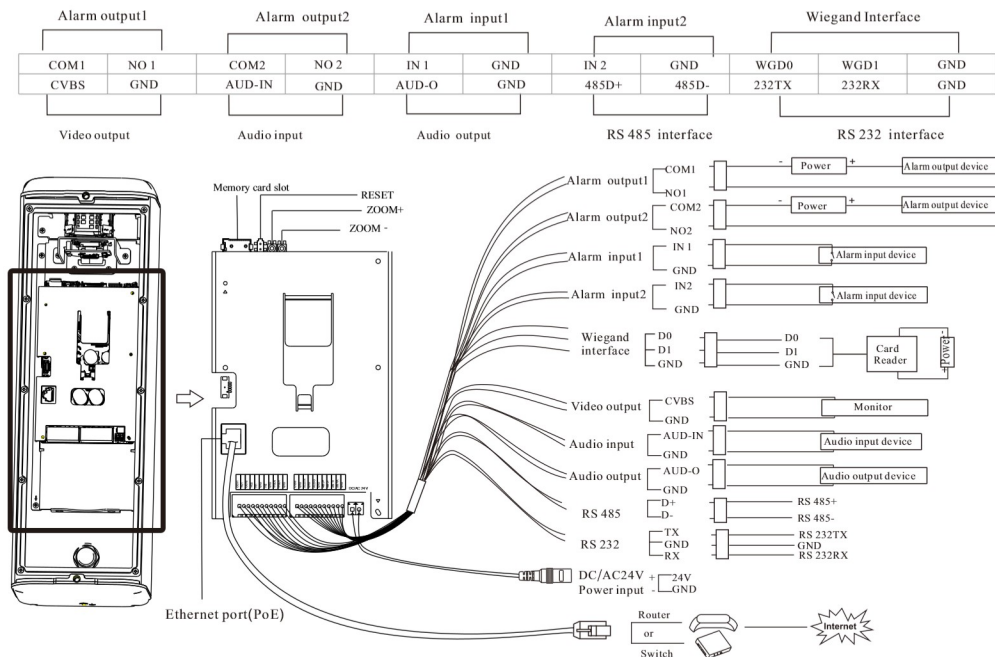



4 Installation

Wall Mounting (* WMT3 is not included)

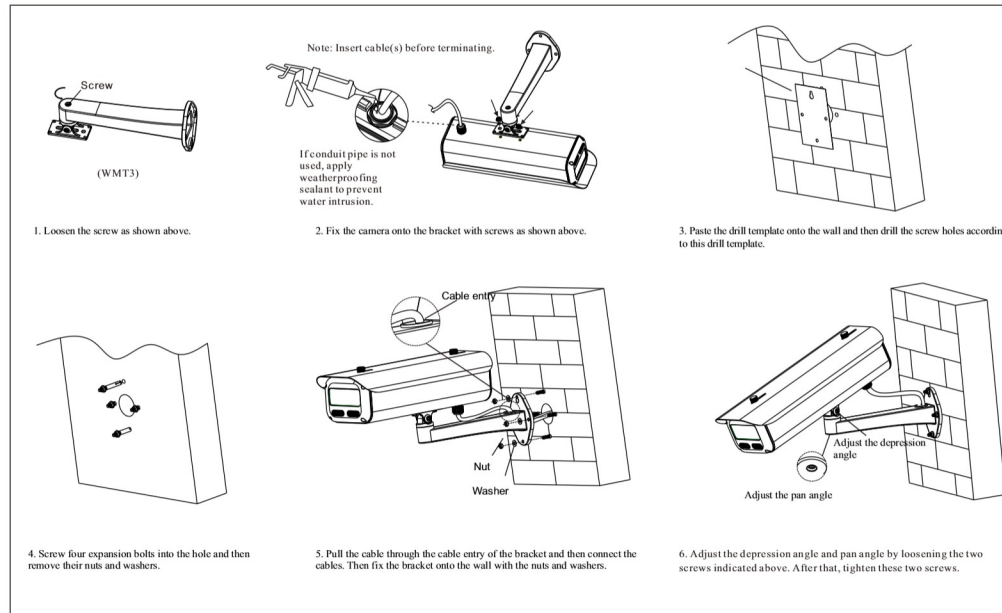


4 Installation

Pole Mounting (* PMT3 is not included)

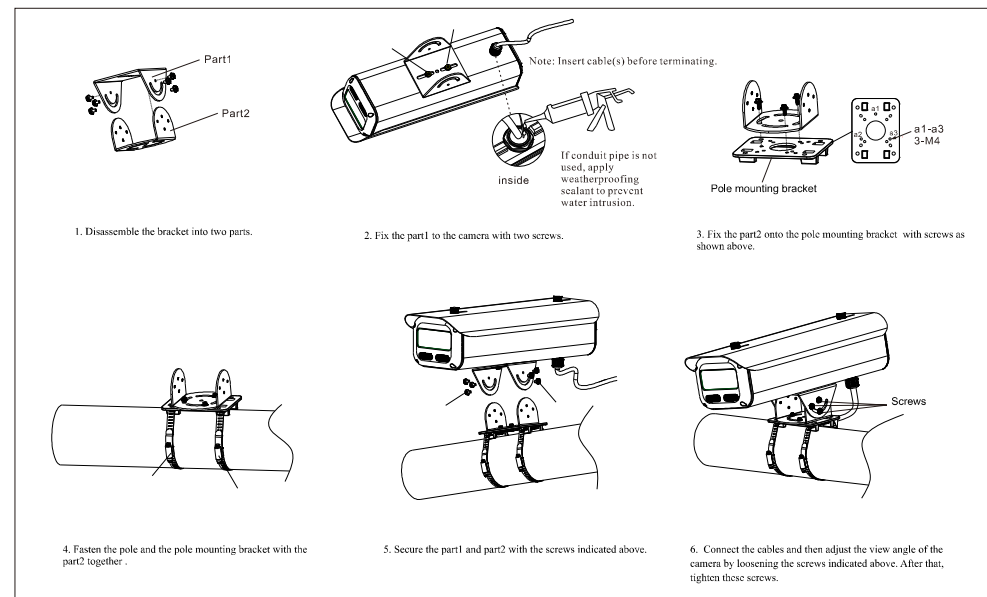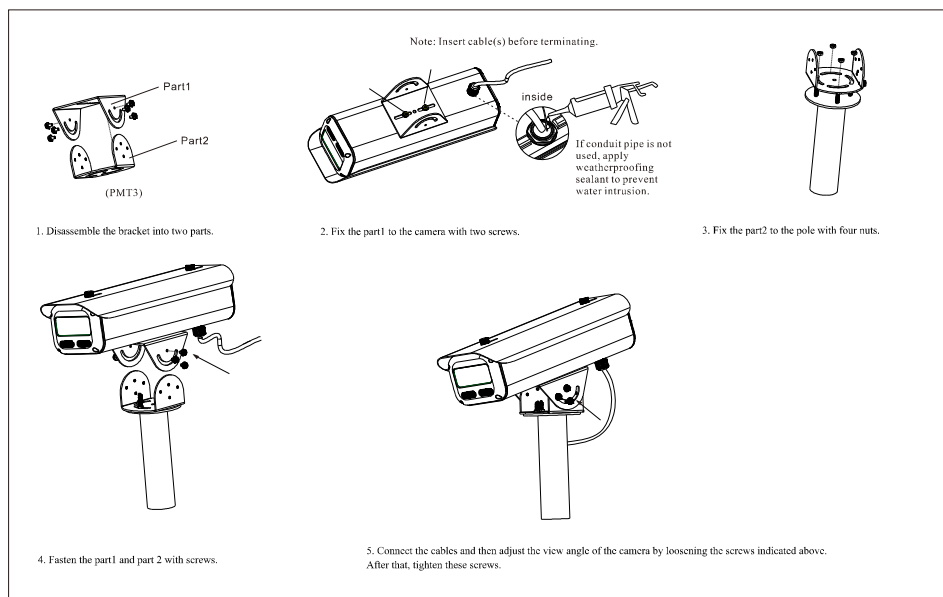

Installation Height Requirement

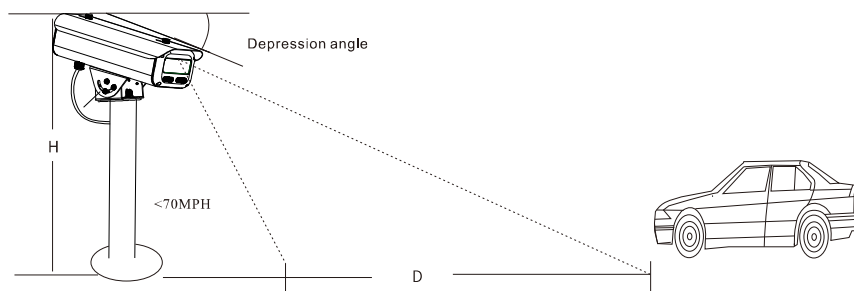

Lens: 8-32mm

Installation Height(H): 15~20ft

Recommended Plate Capture Distance(D): 23-115ft

Please ensure the depression angle of the camera installed is within 25°.

The camera is available for a 8~13ft wide lane.


Caution: Be mindful when positioning the camera as its built-in illumination may cause temporary glare to approaching drivers.

5 Web Operation and Login


IP Scanner can search for the device on the local network.

● Operation

- ① Make sure that the camera and the PC are connected to the same local network. The camera is set to DHCP by default.
- ② Install IP Scanner from the CD and run it after installation. Or download IP Scanner or Speco Blue Scanner from <https://www.specotech.com>



- ③ In the device list, you can view the IP address, model number, and MAC address of each device. Select the applicable device and double click to open up the web viewer. You can also manually enter the IP address in the address bar of the web browser.



The login interface is shown above. Default user name is admin and password is 1234. After logging in, follow directions to install applicable plugins if prompted.