

ROUND GROUND TRACK ROLLING HARDWARE


Mfg. in Italy by **COMUNELLO**
LIFE MADE EASY

WHY ROUND?

- Improved rolling performance over time
- The weight of the gate does not ride on the top of a "V", but across the top of the round surface
- Rolls easier
- Lasts longer




289G-19.68FT
289G-9.84FT
Galvanized, to be bolted in place

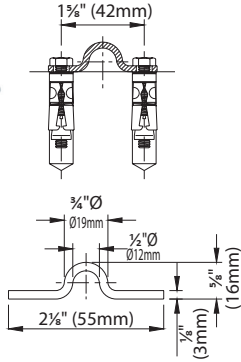

291
Alignment pin for 289G track




287G-19.68FT
287G-9.84FT
Galvanized, to be recessed into the concrete foundation

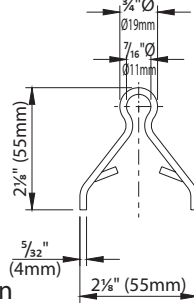

297
Alignment pin for 287G track



287FP-G-19.68FT
287FP-G-9.84FT
Galvanized, recessed guide so track is mounted at floor level
Track and connector rods sold separately.

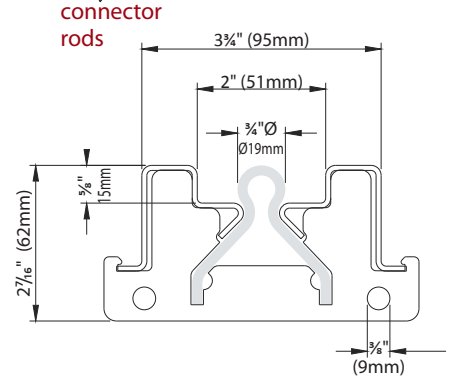

324-100 (C-44)
• 4" heavy duty wheel with **double bearing**
• M18 x 70mm wheel pin
• 1278 lb. capacity per wheel
• grease zerks fittings in axle



328-100
• 4" wheel with **double bearing** and external surface mount support
• 880 lb. capacity per wheel



315-100
• 4" heavy duty wheel with **double bearing**
• M14 x 70mm wheel pin
• 935 lb. capacity per wheel



338-100
• 4" wheel with **double bearing** and recessed mounting plate
• 835 lb. capacity per wheel



202
• Runaway stop
• Mounted via screws
• 4-3/4" high



202F-A
Damped runaway stop. Mounted via screws.



247
Adjustable top guide
For frames 1 1/4" to 2"



247F
Adjustable wall mount top guide
For frames up to 3 3/8"



249-30
Wall mount top guide