


## How to Use the CableRail Tensioning Tool



Trim cables to 8-in. (6-in. is the minimum).



Use the dial at the base of the handle to set the tension indicator to the lowest level, "Start".

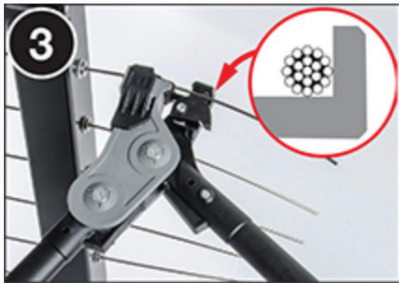

Spread handles and insert cable into the tool. Confirm that the cable is fully seated in the channel at the gripper jaw.



Insert head of the tool into the Quick-Connect® fitting.



Close the handles smoothly to tension cable. An audible "click" and a slight kickback at the handles indicates the selected tension has been applied to the cable.