



MAGNALatch® ACCESS

World's First MagnaLatch Purpose-Built To Be Compatible With An Outdoor Panic Bar. Meets ADA requirements.



**MagnaLatch® ACCESS Vertical Pull
exclusively available with the new
MagnaLatch® Panic Bar to provide a
reliable public pool safety system.**



**MagnaLatch® ACCESS + MagnaLatch® Panic Bar
ML3PB36RVPKA**

MagnaLatch® Panic Bar available separately: **ML3PB36R**

MagnaLatch® ACCESS Industry Leading Safety Features


- Built for outdoor environments – UV stabilized, metal replacement polymer and corrosion resistant components
- ACCESS release pull knob is out of reach of children to help prevent drowning, yet requires no tight gripping or turning to meet ADA requirements
- Meets ADA operable force requirement of under 5 lb
- Cost effective solution to attain the required ADA 54" latch release mounting height on gates with a minimum height of 4'
- Installation to the MagnaLatch Panic Bar is a simple, quick, cost savings solution
- Can be locked when pool is closed
- Gate stop included

World's First Magnetic Latching Panic Bar For Outdoor Gates – No Power Source Needed

- Reliable magnetic latching - no mechanical resistance, gate securely latches every time
- Magnet allows for greater intraday movement – not found in panic bars built for indoor use
- Purpose-built for outdoor environments – corrosion resistant components
- Horizontally adjustable up to ½" with alignment marks to maintain ideal latching range
- Gate gap variance: minimum = 7/16" maximum = 15/16"
- Meets ADA requirements

D&D

ASSA ABLOY

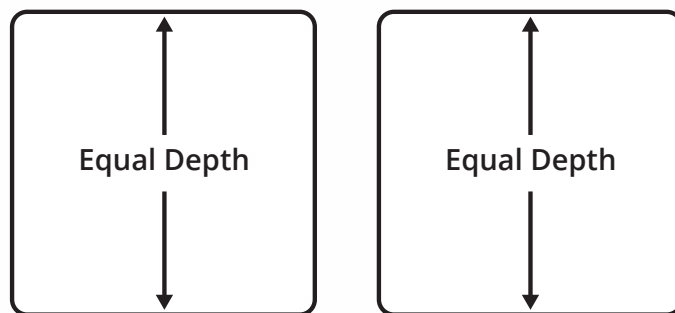


Fence Post

When installing the Panic Bar with the ACCESS the gate frame and fence post must be the same depth.

Code	Color	Model Feature	Ideal Gap	Gap Variance
ML3PB36RVPKA	Black	MagnaLatch® S3 ACCESS Vertical Pull + Panic Bar Keyed Alike	½" (13mm)	⅞ ₁₆ -1⅝ ₁₆ " (11-24mm)
ML3PB36R	Black	36" (915mm) Panic Bar with Rim Strike Plate, Panic Bar only	½" (13mm)	⅞ ₁₆ -1⅝ ₁₆ " (11-24mm)

MagnaLatch® ACCESS Short Bracket

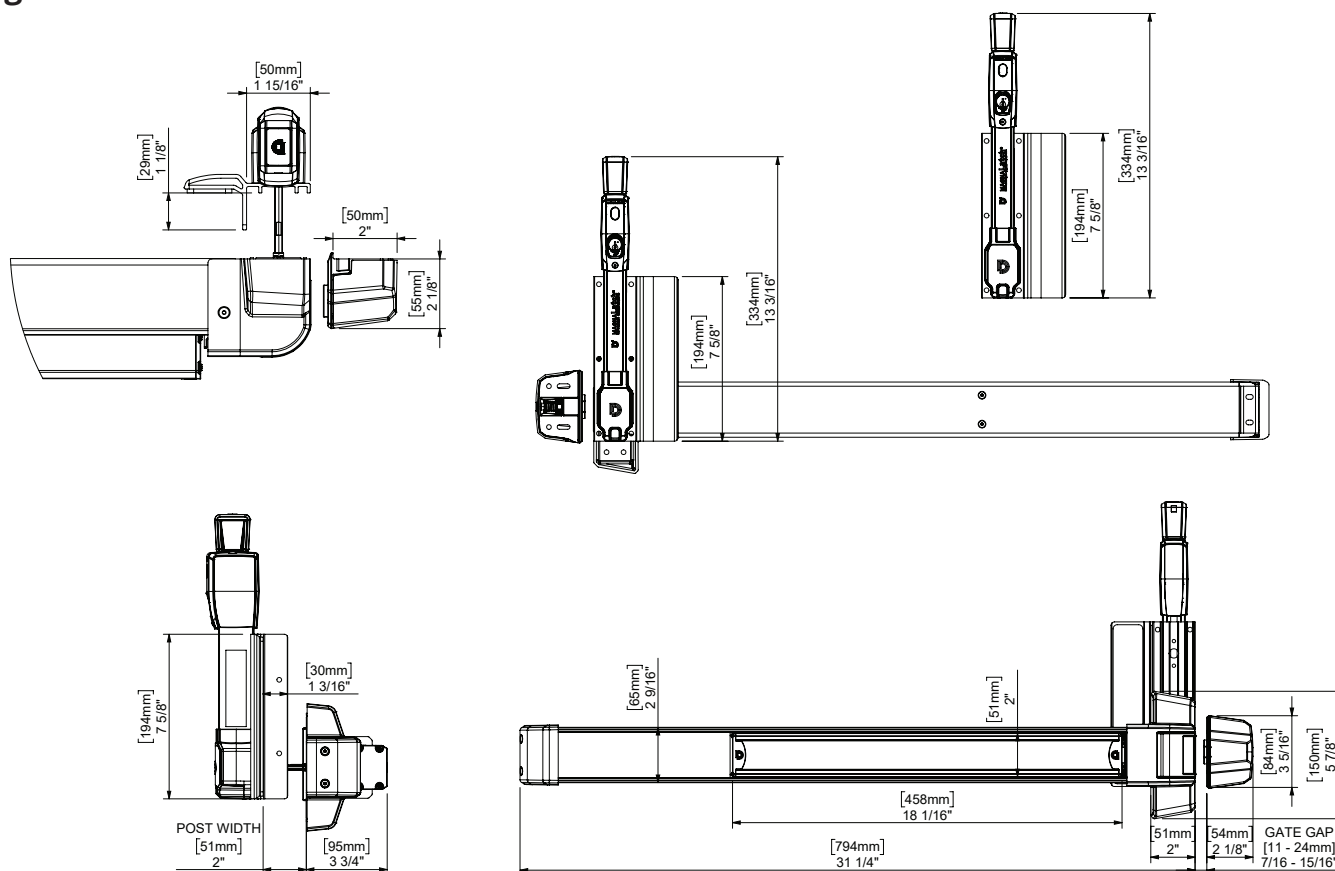

7020 Reames Rd., Unit D, Charlotte, NC 28216
Tel: (800) 716-0888 or (714) 677-1300
Fax: (800) 464-6400 or (714) 677-1299
E-mail: sales.ddtech.us@assaabloy.com

D&D
ASSA ABLOY