

# KUSTOS ULTRA BT UL A40

## RANGE

The BFT Kustos Ultra BT UL linear drive operator is a premium motor for swing gates up to 16 feet and 550 Lbs which are mounted to posts.



The advantage of the system is the completely covered screw drive with magnetic stops in the same enclosed housing. This ensures maximum protection against external agents (water, dust, dirt, etc.) as well as a total protection for people, preventing any type of access to the moving parts.

## KUSTOS SERIES

KR935317 00004- SE Kustos Thalia UL SE – Single Kit

KLEBR93531704- LEB Kustos Thalia UL Large Enclosure-  
Battery Back Up- Single Kit


KR935317 00005- SE Kustos Thalia UL SE- Dual Kit

KLEBR93531705- LEB Kustos Thalia UL Large Enclosure –  
Battery Back Up- Dual Kit

Made In Italy - 2 Year Warranty

### Thalia UL SE

- 10" x 12" Hinged fiberglass enclosure
- UL 2016 compliant
- UL Alarm and Reset



### Thalia UL LEB

- Large 12" x 14" Hinged fiberglass enclosure
- UL 2016 compliant
- Includes: Battery backup with (2) 12V, 9 AH batteries, 15V outlet for accessories



## TECHNICAL FEATURES

Control unit	Thalia
Board power supply	115 V
Operator type	electromechanically operated swing gates
Power supply	24 V
Power input	40 W
Useful rod stroke	14"
Maximum angle	126 °
Cycle time	17 sec
Type of limit switch	magnetic
Locking	mechanical
Release	yes
Frequency of use	intensive
Environmental conditions	from -4 °F to 131 °F
Protection rating	IP44
Battery Back-up	Optional

## SMART TECHNOLOGY

Control unit compatible with the EElink protocol.



Be ahead


BFT Americas, Inc.  
6100 Broken Sound Parkway N.W.  
Boca Raton, FL 33487



T: +1 561 995 8155  
T: US. 1877 995 8155  
info.bft@bft-usa.com  
www.bftaccess.com  
www.bft-usa.com

# KUSTOS ULTRA BT UL A40

## DIMENSIONS

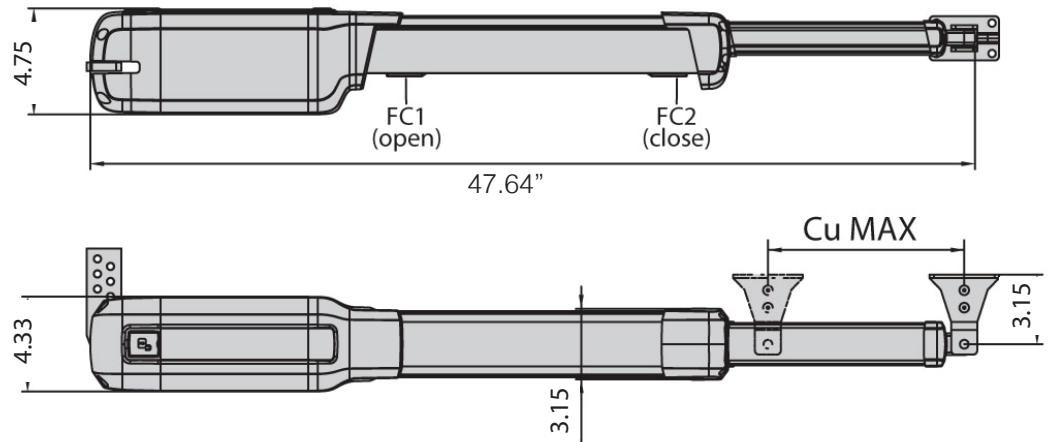


## ACCESSORIES



**CALL BOX PRIME**  
3G Cellular access control system with 7 day time clock



**CELL VIDEO KP**  
WiFi video and audio app based system with 1000 memory keypad




**P125005 - BT BAT Optional**  
24 V dc battery backup system for KUSTOS BT it includes a charger board that activates the batteries when power is off and charges the batteries when power is on.



**P121024 Q-B-TOUCH**  
Digital keypad with 10 channels and 100 combinations. Backlit



**D113746 00001 ZARA CONTROL BOARD**  
Board power supply: 115 V



**KHLKIT HOMELINK KIT**  
HomeLink Compatible receiver and transmitter for installing HomeLink with BFT Zara



**N999629 - Mitto Rainbow Back Mitto 4 in 4 Colors.**  
Pack of 4. Burgundy, White, Yellow, Black



**D111904 Mitto 2 Transmitter:**  
12V Two channel 433Mhz rolling code remote control



**D111906 - Mitto 4 Transmitter**  
Four channel Rolling code remote control



Be ahead

BFT Americas, Inc.  
6100 Broken Sound Parkway N.W.  
Boca Raton, FL 33487

T: +1 561 995 8155  
T: US. 1877 995 8155  
info.bft@bft-usa.com  
www.bftaccess.com  
www.bft-usa.com