Altronix®

Rev. 07062023

T2M7LXK2D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

TROVE PLUS

Altronix T2M7LXK2D is a 6-door access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for Mercury* hardware. This unit provides ample power and dual voltage outputs to support Mercury platform controllers and locking devices. The T2M7LXK2D accommodates one (1) Intelligent Controller and three (3) Dual Reader Interface Modules. Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.

***Also compatible with these authentic Mercury partners:**

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identicard, IMRON, Johnson Controls, Kastle, Keri Systems, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic i-PRO MonitorCast, Quintron, RS2, S2 Security, Schneider Electric, Vanderbilt

MERCURY SECURITY

T2M7LXK2D - includes AL1024ULXB2, ACMS8CB, VR6, PDS8CB, wire harnesses and finger duct

Mercury boards are not included

Key Features

- Accommodates the following Mercury controllers:
  1 - LP2500 and 3 - MR52
- Convenient knockout configuration:
  - One (1) single knockout - 2" Conduit
  - Sixteen (16) double knockouts - 1/2" Conduit and 3/4" Conduit
- Unit includes:
  - Removable backplane
  - 2" high finger duct for wire management
  - Custom wire assemblies for power distribution with terminal blocks for controller connections
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Supervision
  - AC Fail
  - Battery Fail and Battery Presence
- Agency Listings:
  - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
  - UL: UL294 - Access Control System
  - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
  - CE European Conformity
- Enclosure accommodates up to four (4) 12VDC/7AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

T2M7LXK2D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

TROVE PLUS

Specifications

Power Supply (AL1024ULXB2):

Input
- Voltage: 115VAC 60Hz, 4.2A max.
- Input Fuse: 5A/250V

Outputs
- Voltage: 24VDC
- Current: 10A @ 24VDC continuous max.
- Other: Overvoltage protection. Filtered and regulated

Battery Charging
- Capacity: 12VDC/7AH (2 within enclosure)
  40AH/65AH (requires separate enclosure)
- Type: Sealed lead acid or gel type
- Failover: Upon AC loss, instantaneous

Batteries are sold separately

Supervision
- AC Failure: Form "C" contacts
- Battery: Form "C" contacts

Indicators (LED)
- Input: 115VAC is present
- DC Output: Powered
- Battery: Discharged or not connected

Dual Input Access Power Controller (ACMS8CB):

Input
- Voltage: 24VDC from AL1024ULXB2 and 12VDC from VR6
- Input PTCs: 9A

Outputs
- Voltage: 12VDC and/or 24VDC

Eight (8) independently controlled PTC outputs
a) Fail-Safe and/or Fail-Secure power outputs.
Form "C" Relays rated 28VAC or VDC @ 2.5A
b) Auxiliary power outputs (unswitched)
c) Any combination of the above

- Output PTCs: 2.5A

Indicators (LED)
- Red LEDs: Outputs are triggered (relays energized)
- Green LED: FACP disconnect is triggered

Voltage Regulator (VR6):

Input
- Voltage: 24VDC from AL1024ULXB2

Output
- Voltage: 12VDC
- Current: 6A continuous
- Other: Surge suppression

Indicators (LED)
- Input: 24VDC is present
- Output: Powered

Dual Input Power Distribution Module (PDS8CB):

Input
- Voltage: 24VDC from AL1024ULXB2 and 12VDC from VR6
- Input PTCs: 9A

Outputs
- Voltage: 12VDC and/or 24VDC

Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2
Individual outputs may be set to OFF position for servicing

- Output PTCs: 2.5A

Indicators (LED)
- DC Output: Eight (8) individual output LEDs
  - Green: 12VDC
  - Red: 24VDC

T2M7LXK2D Kit:

Agency Listings
- CE: European Conformity

All components of this Trove kit are UL Listed sub-assemblies
Please refer to the corresponding Sub-Assembly Installation Guides for further information

Physical and Environmental:

Dimensions (H x W x D)
Enclosure:
27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
Shipping:
32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)

Weight (approx.)
- Product: 41.6 lb. (18.87 kg)
- Shipping: 45.6 lb. (20.68 kg)

Temperature
- Operating: 0ºC to 49ºC (32ºF to 120ºF)
- Storage: – 20ºC to 70ºC (– 4ºF to 158ºF)

- Relative Humidity: 85% +/– 5%
- BTU/Hr. (approx.): 145 BTU/Hr

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

T2M7LXK2D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

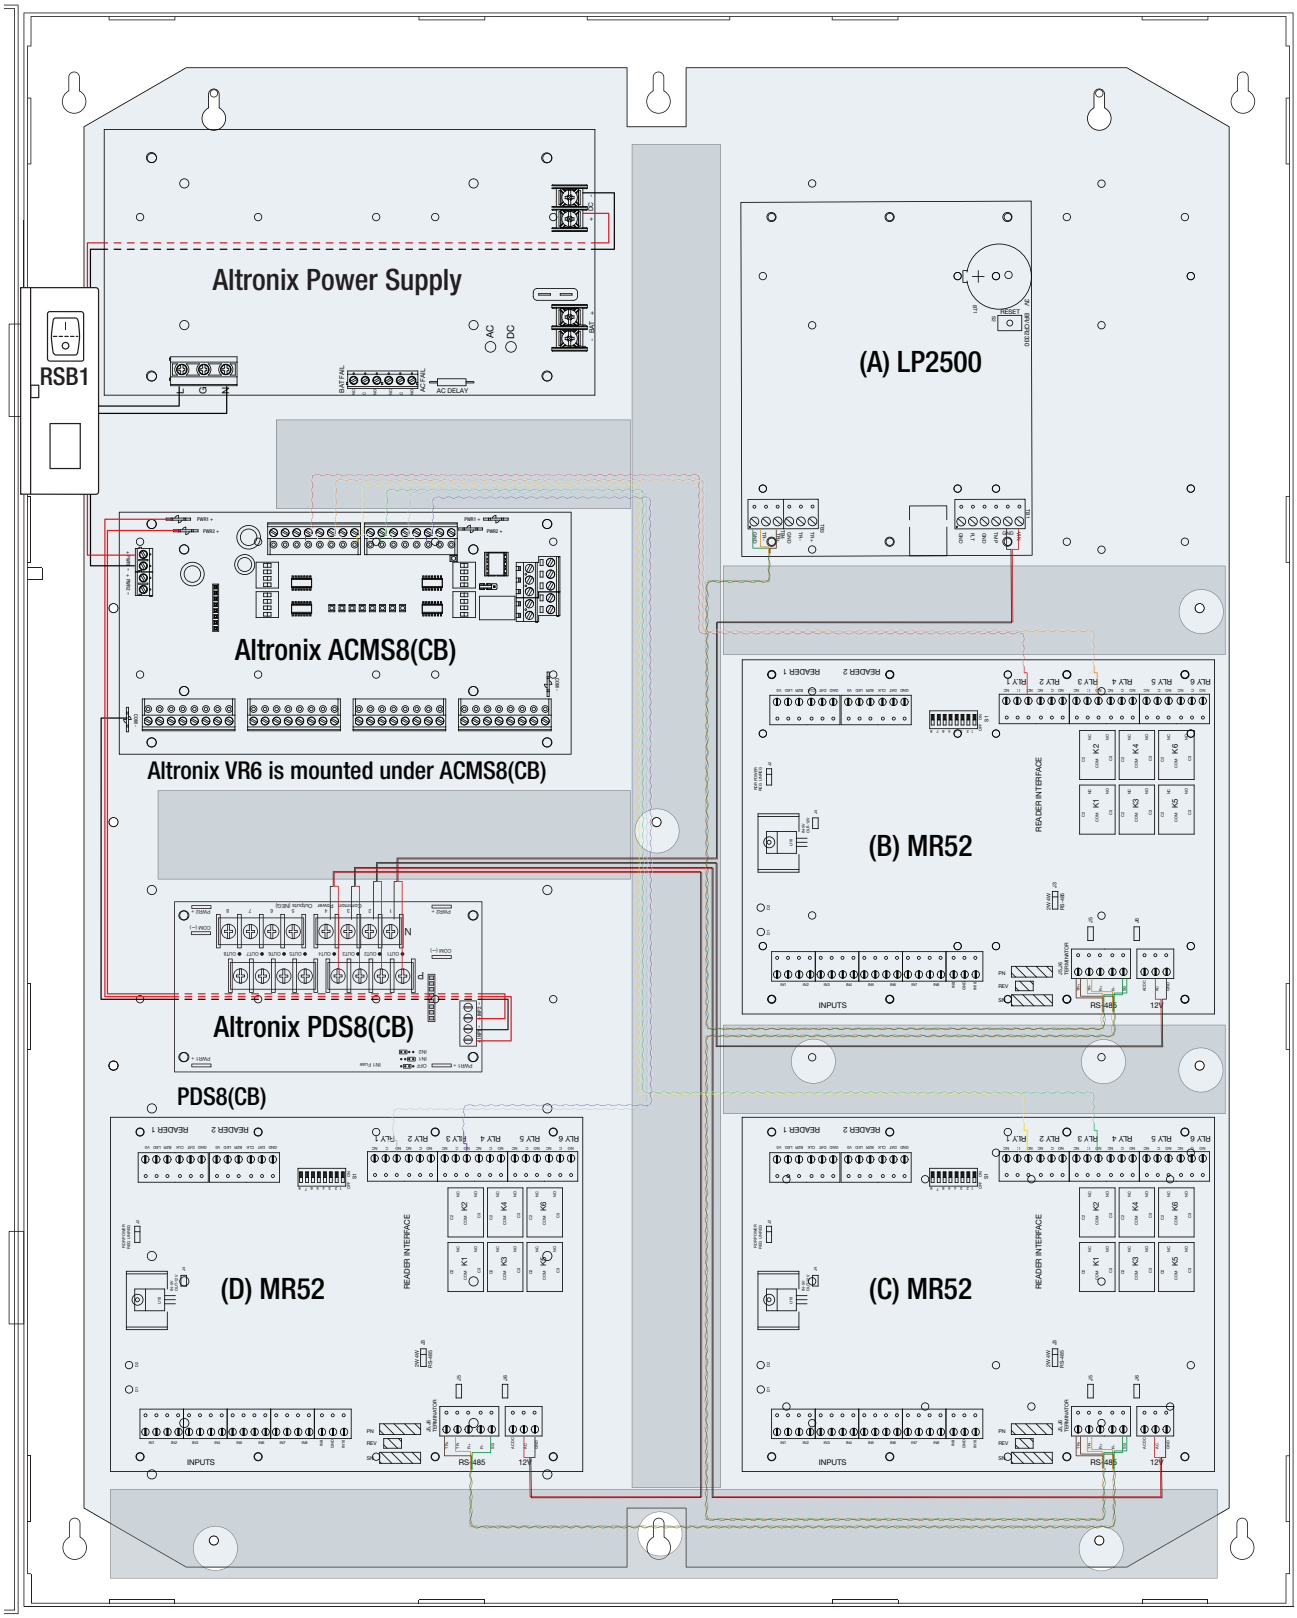

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

T2M7LXK2D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

TROVE PLUS

Accessories (order separately)

WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps.
These are ideal for wire management in our Trove series.

Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC with batteries

Trove2BWC with wires

TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution.The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets.Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

T2M7LXK2D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25” x 21.5” x 6.5” (692.2mm x 546.1mm x 165.1mm)

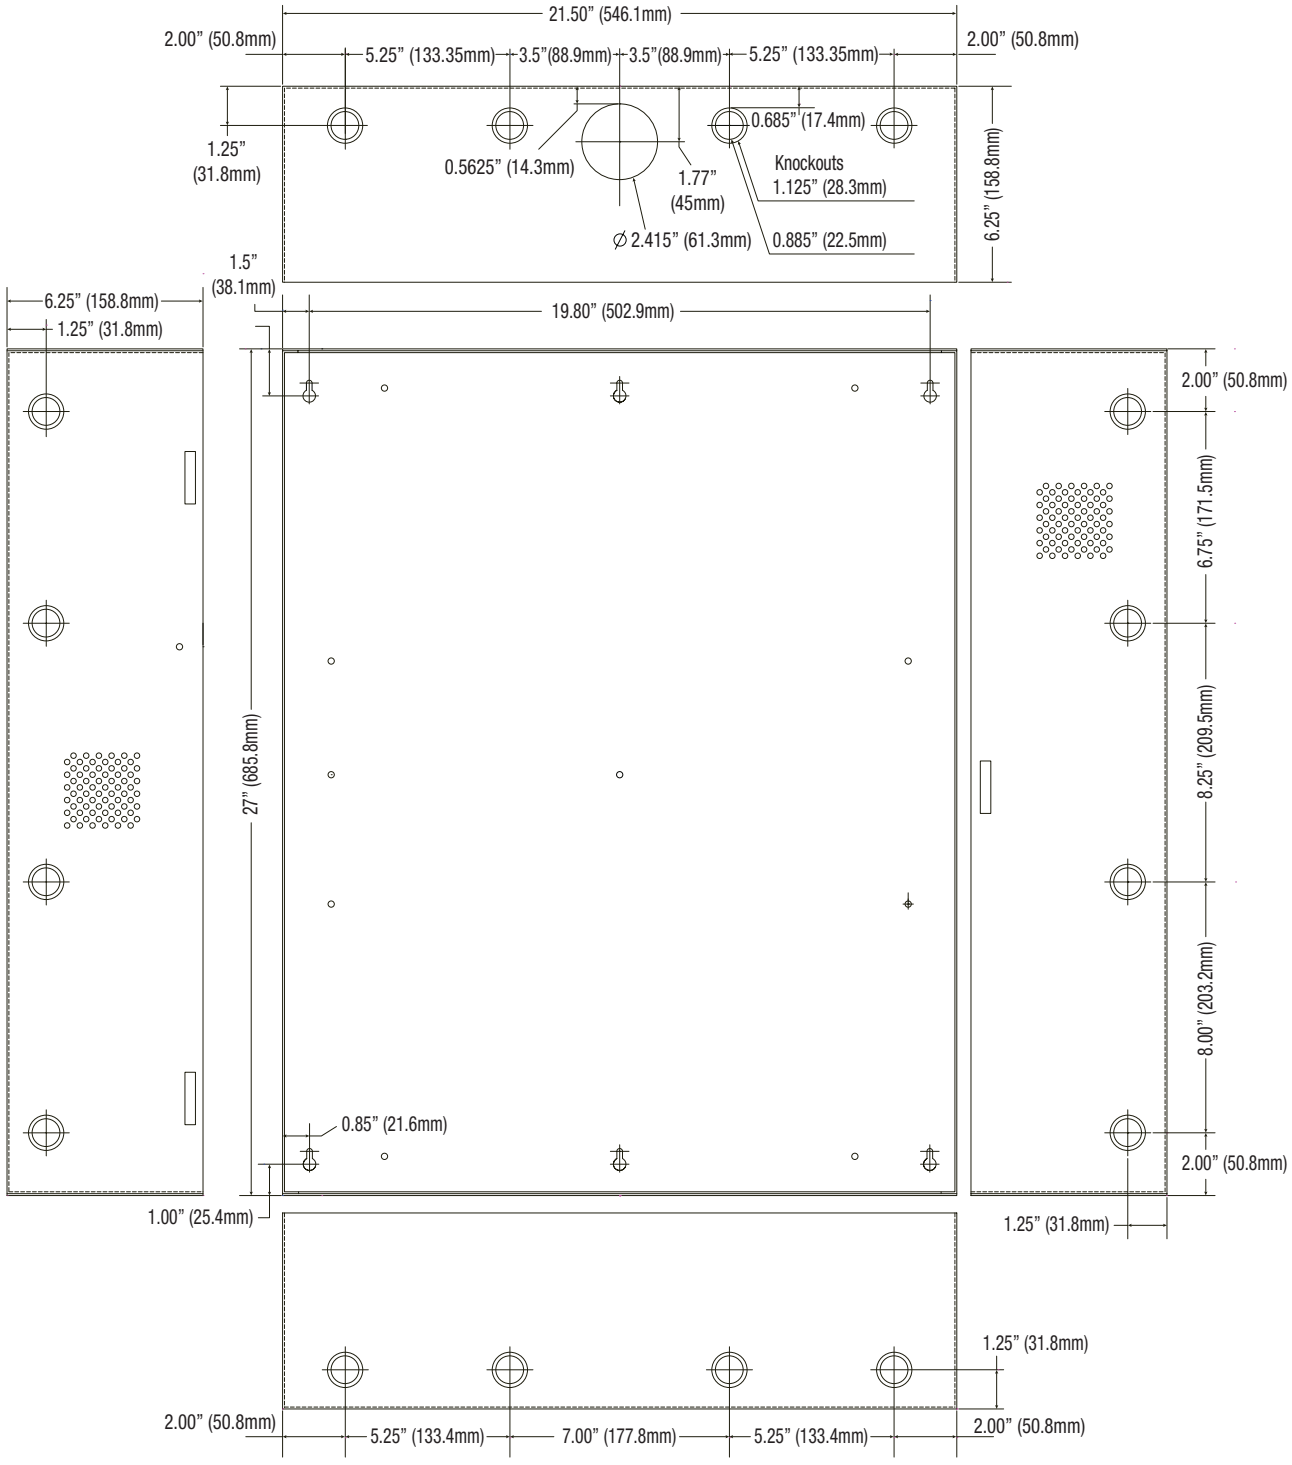

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com