I56-3442-000

SILENT KNIGHT
by Honeywell

7550 Meridian Circle, Maple Grove, MN 55369-4927
763-493-6455; 800-328-0103 Fax: 763-493-6475
http://www.silentknight.com

SK-Monitor Module

SPECIFICATIONS

Normal Operating Voltage:	15 to 32 VDC
Maximum Current Draw:	5.0 mA (LED on)
Average Operating Current:	375µA (group poll), 350 µA (direct poll), 600 µAmps (communication, IDC shorted)
EOL Resistance:	47K Ohms
Max. IDC wiring resistance:	1,500 Ohms
Maximum IDC Voltage:	11 Volts
Maximum IDC Current:	450µA
Temperature Range:	32°F to 120°F (0°C to 49°C)
Humidity:	10% to 93% Non-condensing
Dimensions:	4½″ H x 4″ W x 1¼″ D (Mounts to a 4″ square by 2⅛″ deep box.)
Accessories:	SMB500 Electrical Box

BEFORE INSTALLING

This information is included as a quick reference installation guide. Refer to the control panel installation manual for detailed system information. If the modules will be installed in an existing operational system, inform the operator and local authority that the system will be temporarily out of service. Disconnect power to the control panel before installing the modules.

NOTICE: This manual should be left with the owner/user of this equipment.


GENERAL DESCRIPTION

The SK-Monitor Module is intended for use in intelligent, two-wire systems, where the individual address of each module is selected using the built-in rotary switches. It provides either a Class A or Class B fault tolerant initiating device circuit (IDC) for normally open contact fire alarm and supervisory devices, or either normally open or normally closed security devices. The module has a panel controlled LED indicator.

COMPATIBILITY REQUIREMENTS

To ensure proper operation, this module shall be connected to a compatible Silent Knight system control panel (list available from Silent Knight).

FIGURE 1. CONTROLS AND INDICATORS:

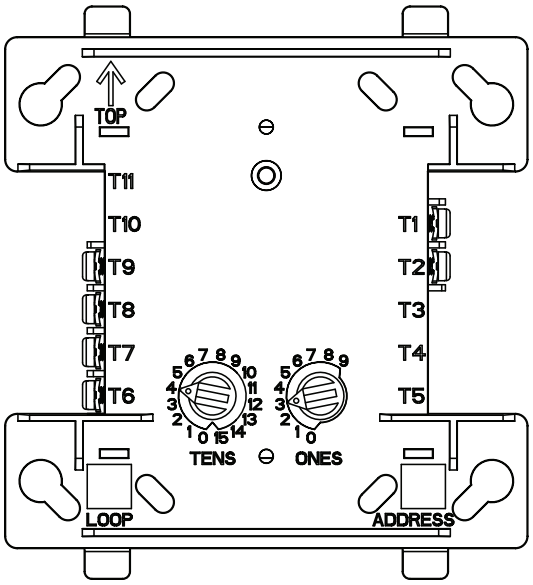


C1067-00

MOUNTING

The SK-Monitor mounts directly to 4-inch square electrical boxes (see Figure 2). The box must have a minimum depth of 2⅛ inches. Surface mounted electrical boxes (SMB500) are available from Silent Knight.

FIGURE 2. MODULE MOUNTING:

NOTE: For UL Listed security installations, the SK-Monitor must be mounted within the control panel enclosure.

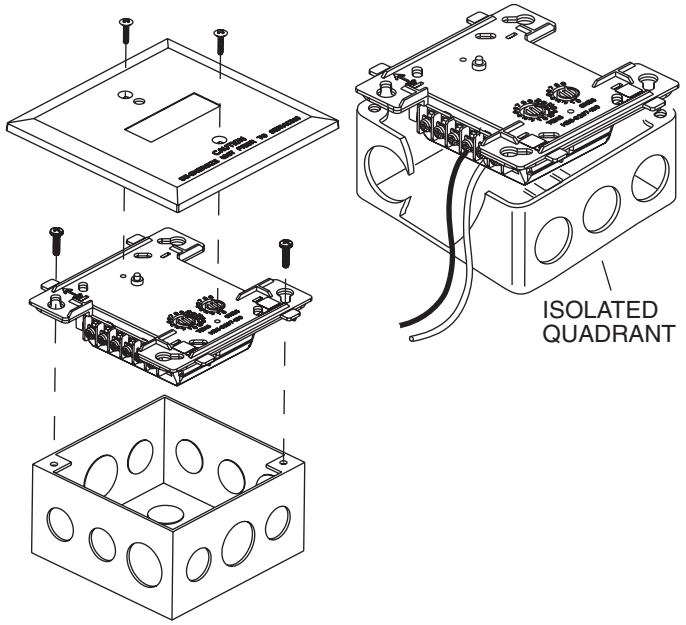

C1066-00


WIRING

NOTE: All wiring must conform to applicable local codes, ordinances, and regulations. This module is intended for power limited wiring only.

1. Install module wiring in accordance with the job drawings and appropriate wiring diagrams.
2. Set the address on the module per job drawings.
3. Secure module to electrical box (supplied by installer), as shown in Figure 2.


FIGURE 3. TYPICAL 2-WIRE INITIATING CIRCUIT CONFIGURATION, NFPA STYLE B OR SECURITY SYSTEMS:

NOTE: For UL Listed security installations, the SK-Monitor must be mounted within the control panel enclosure.

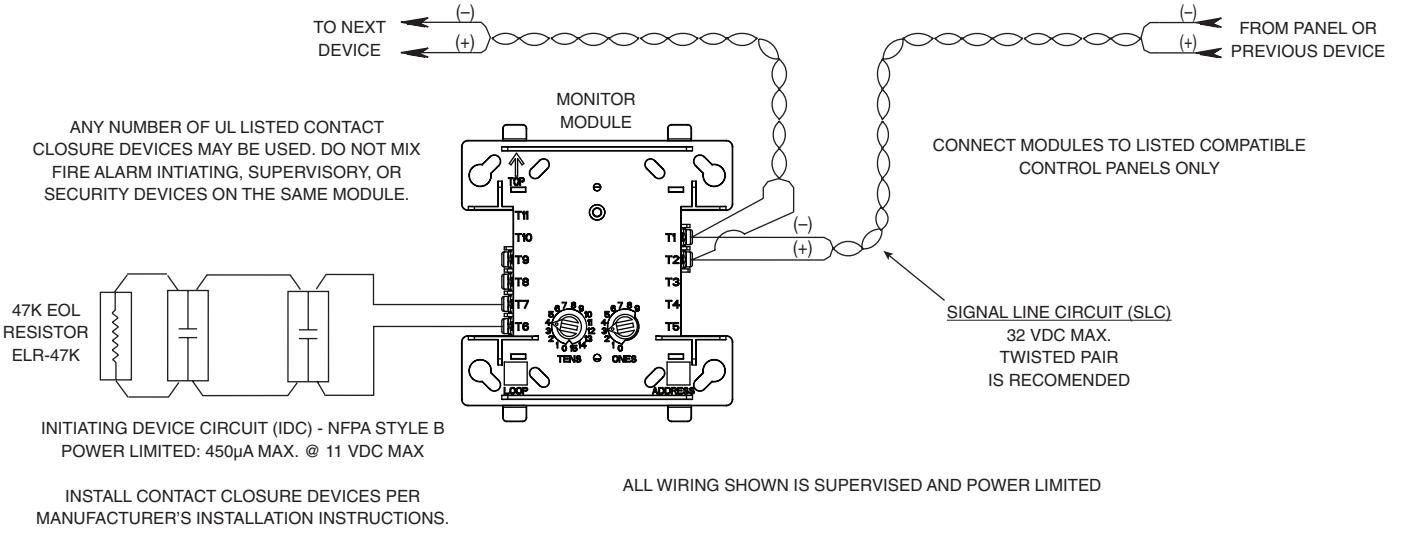

C0918-00

FIGURE 4. TYPICAL 4-WIRE FAULT TOLERANT INITIATING CIRCUIT CONFIGURATION, NFPA STYLE D:

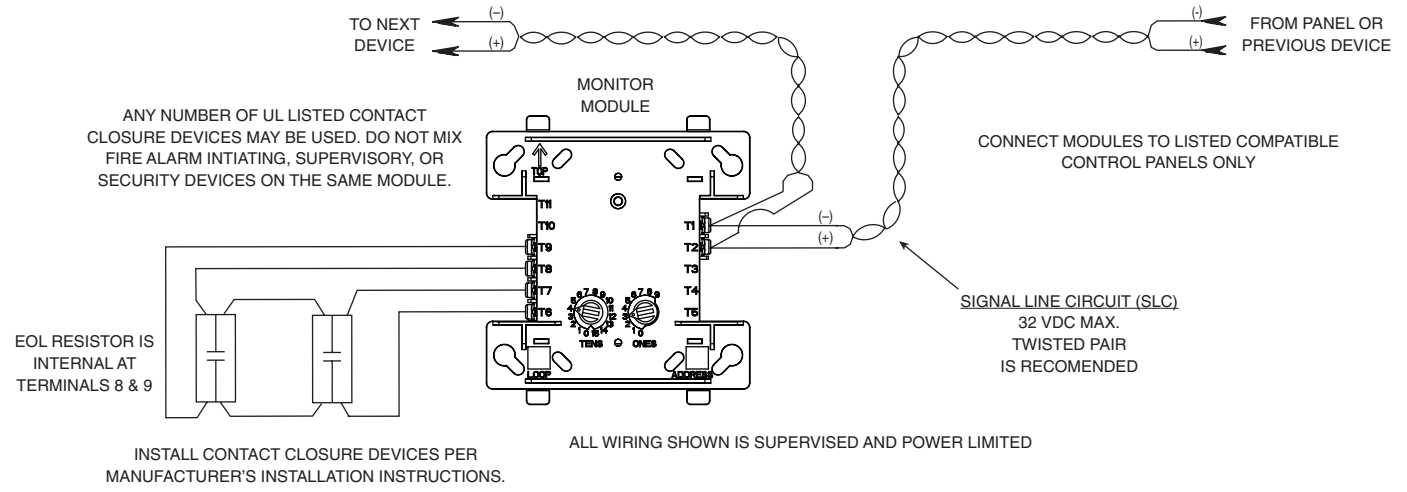

C0919-00

©2009 Silent Knight