

T3VK7520 (Kit)

Access & Power Integration Solution for HID Aero/VertX

TROVE™

Altronix T3VK7520 kit consists of Trove3 enclosure, TV3 HID Aero/VertX/Altronix backplane with one (1) 24VDC @ 10A and one (1) 12VDC @ 10A power supply/chargers, two (2) 8-output fused access power controllers, one (1) 4-output fused access power controller and one (1) 8-output fused power distribution module. Also featured is a rocker switch bracket with two (2) rocker switches.

This kit also accommodate up to ten (10) HID Aero/VertX modules for up to twenty (20) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T3VK7520 with Aero boards in cases

T3VK7520 with Aero boards no cases

**VertX/Aero modules are not included*

Key Features

- One (1) 24VDC and one (1) 12VDC power supply/chargers
- Accommodates up to ten (10) VertX® V100, V200, V300, V1000, V2000 or Aero X100, X200, X300, X1100 modules
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Two (2) double knockouts 1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)
 - Thirteen (13) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
 - AC Fail
 - Low Battery and Battery Presence
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications

Power Supply 1 (AL1024ULXB2):

Input

Voltage	115VAC 60Hz, 4.2A max.
Input Fuse	5A/250V

Output

Voltage	24VDC
Current	10A @ 24VDC continuous max.
Other	Oversvoltage protection. Filtered and regulated

Power Supply 2 (AL1012ULXB):

Input

Voltage	115VAC, 60Hz, 2.6A max.
Input Fuse	5A/250V

Output

Voltage	12VDC
Current	10A @ 12VDC continuous max.
Other	Oversvoltage protection. Filtered and regulated

Both Power Supplies:

Battery Charging

Capacity	12VDC/12AH (4 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Indicators (LED)

Input	115VAC is present
DC Output	Powered
Battery	Discharged or not connected

Two (2) Access Power Controllers (ACM8):

Input

Voltage	24VDC from AL1024ULXB2
Input Fuse	10A/250V

Outputs

Voltage	24VDC
Eight (8) independently controlled fused outputs:	
a) Fail-Safe and/or Fail-Secure power outputs.	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	
Output Fuses	3.5A/250V

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

Access Power Controller (ACM4):

Input

Voltage	24VDC from AL1024ULXB2
Input Fuse	10A/32V

Outputs

Voltage	24VDC
Four (4) independently controlled fused outputs:	
a) Fail-Safe and/or Fail-Secure power outputs.	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output Fuses	3A/32V
--------------	--------

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

Power Distribution Module (PD8UL):

Input

Voltage	12VDC from AL1012ULXB
---------	-----------------------

Outputs

Voltage	12VDC
Output Fuses	3.5A/250V

Indicators (LED)

Green LED	DC Output
-----------	-----------

T3VK7520 Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies
Please refer to the corresponding Sub-Assembly Installation Guides for further information

CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure: 36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)
Shipping: 40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)

Weight (approx.)

Product:	85 lb. (38.6 kg)
Shipping:	92 lb. (41.73 kg)

Temperature

Operating:	0°C to 49°C (32°F to 120°F)
Storage:	- 20°C to 70°C (- 4°F to 158°F)

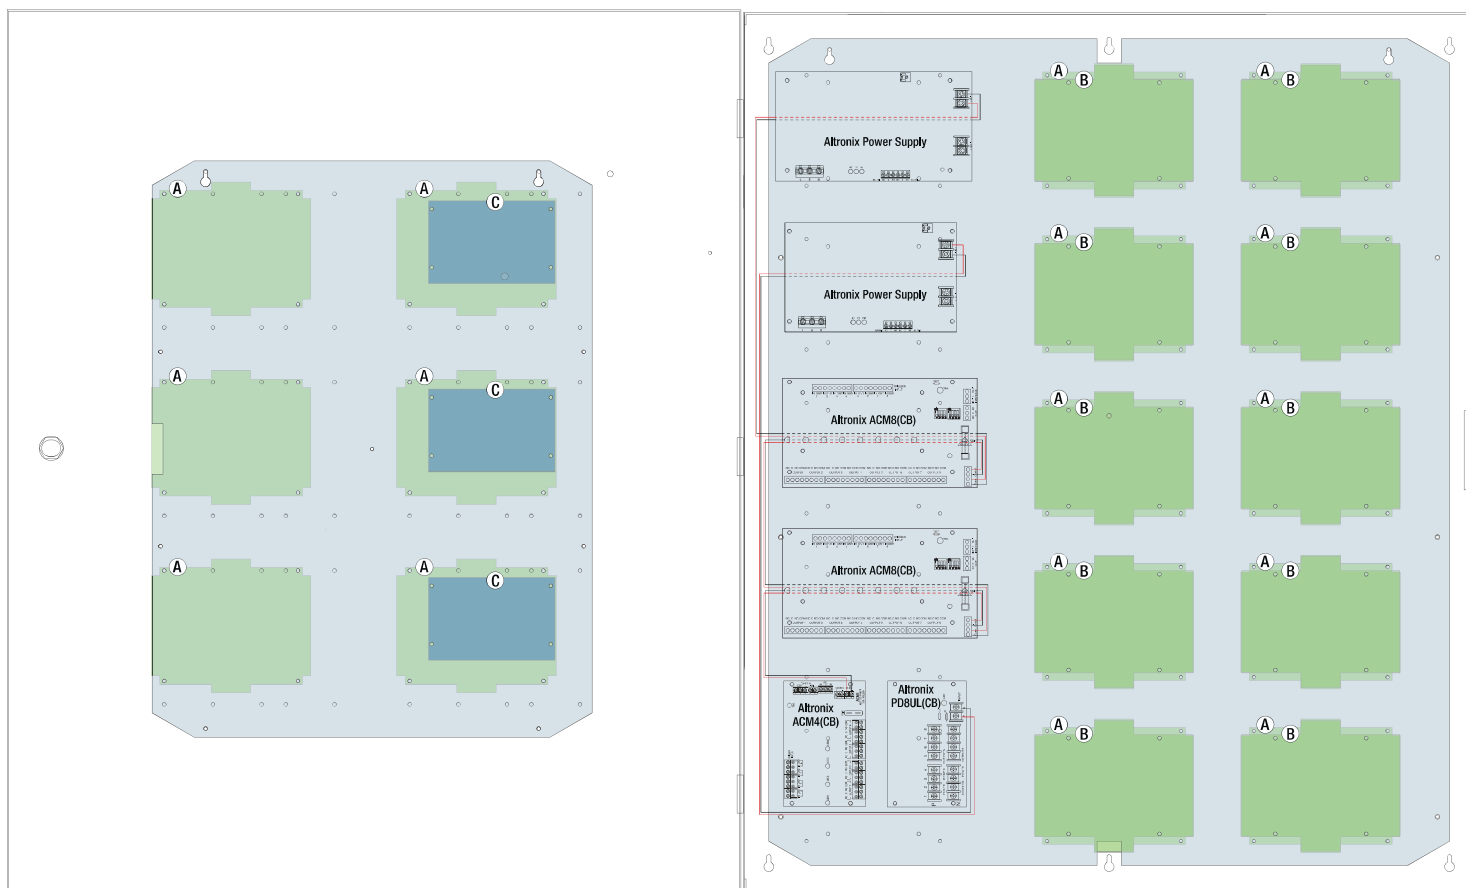
Relative Humidity 85% +/- 5%

BTU/Hr. (approx.): 177 BTU/Hr.

Access Controller Position Chart for the Following Models:

Altronix / HID Aero/VertX	Pem Mounting
Aero™: X100, X200, X300, X1100	(A)
Aero™: X100, X200, X300, X1100 (without case on TV3 only)	(B)
ACM4, ACM4CB, ACM8, ACM8CB, ACMS8, ACMS8CB, ACMS12, ACMS12CB, LINQ8ACM, LINQ8ACMCB, LINQ8PD, LINQ8PDCB, MOM5, PD4UL, PD4ULCB, PD8UL, PD8ULCB, PDS8, PDS8CB, PDS16, PDS16CB, VR6, GB1 (accommodates Genetec Synergis Cloud Link)	(C)

TMV2 Door Backplane (Order Separately)



Accessories (order separately)

WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

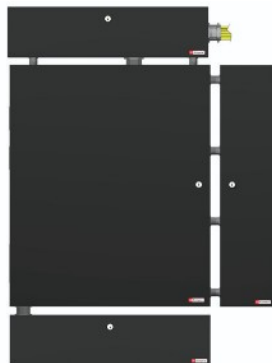
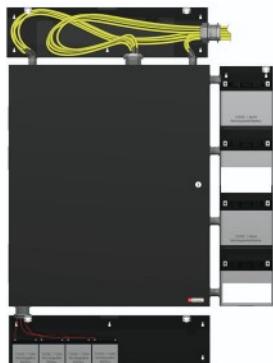
Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

*Typical battery/wiring setup with Trove3 Enclosure (not included)***TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure**

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets. Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

Dimensions and Drawing

Dimensions (H x W x D approximate)

36.12" x 30.12" x 7.06" (917.5mm x 768.1mm x 179.3mm)

