



CONNECT-FLX

Connect-FLX is a professional-grade wireless security panel designed to provide advanced security and automation services. It comes standard with secured and supervised multi-carrier SIM cellular, Wi-Fi®, and Ethernet connections.


Its long-range encrypted wireless receiver ensures comprehensive site coverage, while the integrated sensor translator simplifies the takeover of existing systems.

Wireless arming stations and mobile devices eliminate the need to mount Connect-FLX on an entry wall, allowing flexible installation in a location that best suits Internet and power connections.



Translator and Partitions

Take over existing sensors within a home or business using the integrated sensor translator. Protect offices, suites, or multiple buildings on a property with up to eight partitions. No matter your needs, Connect-FLX enables flexible installations in new and existing commercial or multi-family housing applications.

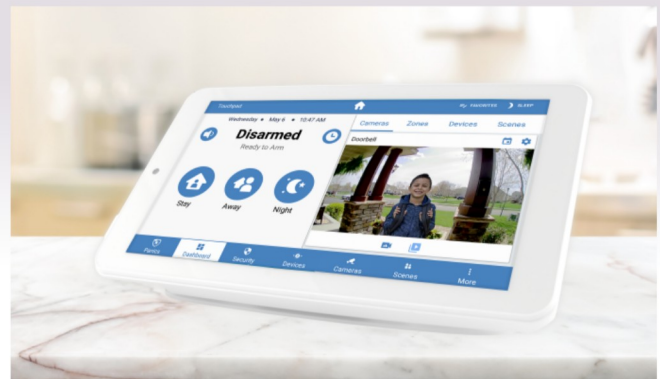

Local Programming

Simplify the installation process with the ability to program the Connect-FLX locally on the Touchpad. Set up users, program zone settings, and more, all done locally without having to use a laptop or tablet on-site.

Touchpad Speaks

Add audible zone and system status to Connect-FLX installations. The Slimline Touchpad announces changes in arming status, security and environmental sensor activity, and even Z-Wave device activity. When installed on a system that includes an Alula Doorbell Camera, two-way conversations with persons on the doorstep are available.



Technical Specifications

Physical	
Housing Dimensions	6 x 6 x 1.28 Inches (15.21 x 15.21 x 3.25cm)
Weight	16.5 Ounces (467 grams)
Mounting Fastener	#6 or #8 screws (included)
Environmental	
Operating Temperature	32 to 120 °F (0 to 49 °C)
Storage Temperature	-4 to 86 °F (-20 to 30 °C)
Maximum Humidity	85% non-condensing relative humidity
Device Specifications	
Communication	Cellular, Wi-Fi®, Ethernet
Users	50 Users
Zones	96
Partitions	8
Interface Devices	Up to 4 Touchpads, up to 8 PINPads
Sensor Frequencies	433.92MHz, 345MHz, 319.5MHz
Power Supply Number	12V Input Provided: RE012-6(W) (US)
Battery Part Number	RE029
Backup	24 hours
Tamper Indications Sensors	Cover opening, wall removal
Certification	
CONNECT-FLX	UL 985, UL 1023, UL 2610 FCC, IC ULC-S304, ULC-S545
Warranty	5 years

*Specifications subject to change without notice.