



# kirei

## BARCODE TILES

### Acoustic Tiles

Add visual appeal, texture and sound absorption to any flat wall with these 3D tiles! Designed to be staggered, rotated, or aligned, Barcode Tiles can be configured in numerous ways, offering a variety of design possibilities. Plus, the 36% layered coverage adds more sound absorption and diffusion! Installing Barcode Tiles is easy; simply use standard construction adhesive suitable for PET plastic and wall surfaces and you're all set!

Product shown: Barcode Tiles in Pacific

# Specs

Style	Standard (LxH)	Thickness	Weight/Box	Qty/Box	SF/Box
Barcode Tile	15.5" x 7.75"	0.94"	8 lbs	12	10

All specs refer to singular products and not multiples unless specified. Due to the nature of the material, cutting and fabrication process, minor dimensional variances may occur. Custom options available upon request.

Designer	Kirei
Material	100% PET (60% post-consumer recycled)
Fire Rating	ASTM E84 Class A
Custom Options	Available upon request
Lead Time	Please refer to <a href="http://kireiusa.com">kireiusa.com</a> for updated lead times.
VOC Emissions	CDPH (CA 01350) Compliant TVOC: <0.5 mg/m <sup>3</sup>

\*Actual lead times are determined when the project goes into production and can change based on production schedule and all quantities, color and thicknesses being in stock at time of order. See [Kirei's Product Lead Time Disclosure](#) for more information.




# Acoustic Data


## Sound Absorption

Frequency	250Hz	500Hz	800Hz	1000Hz	2000Hz	4000Hz	NRC
m <sup>2</sup> /Object	0.62	2.76	4.70	5.53	6.55	7.05	0.60


Acoustic data is measured in Sabins per Barcode Tile.

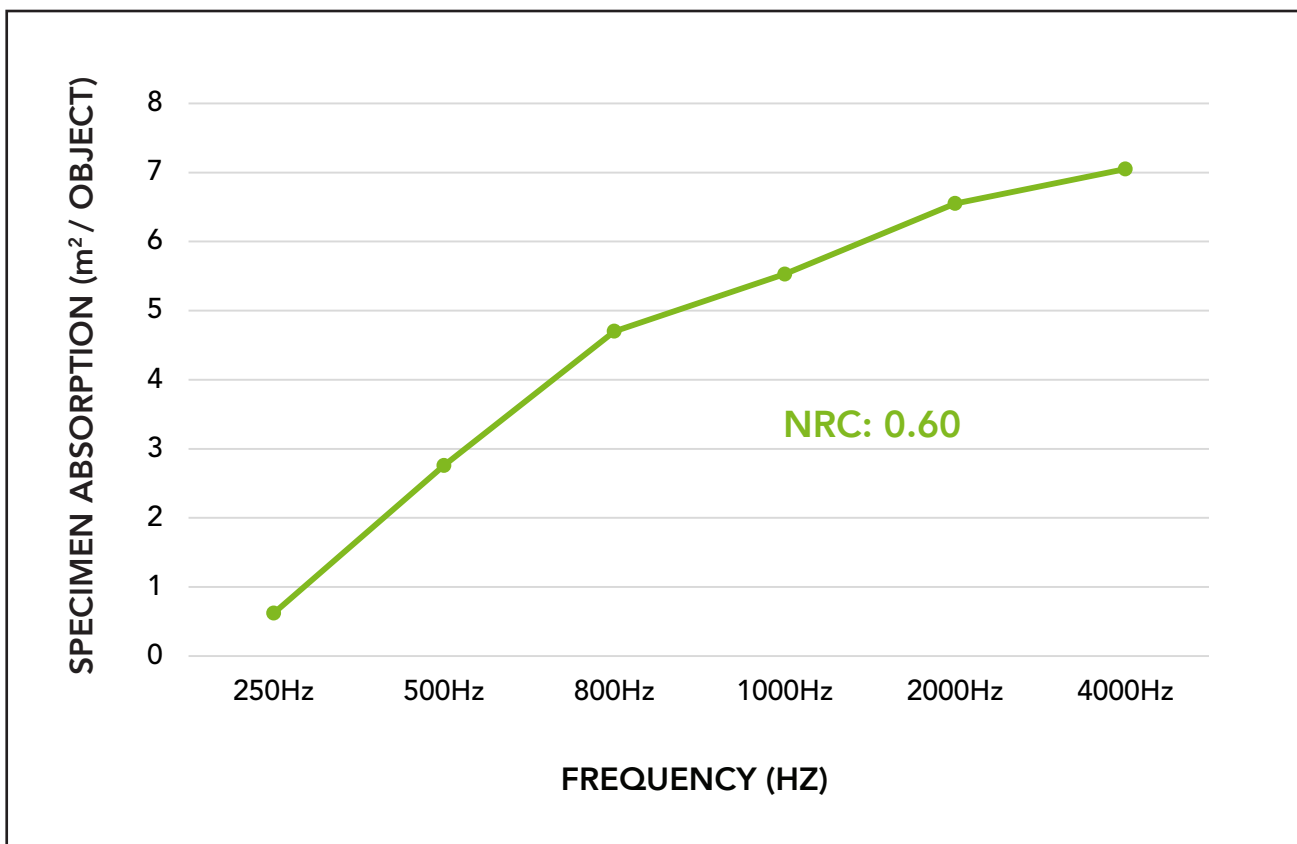

# Product Dimensions

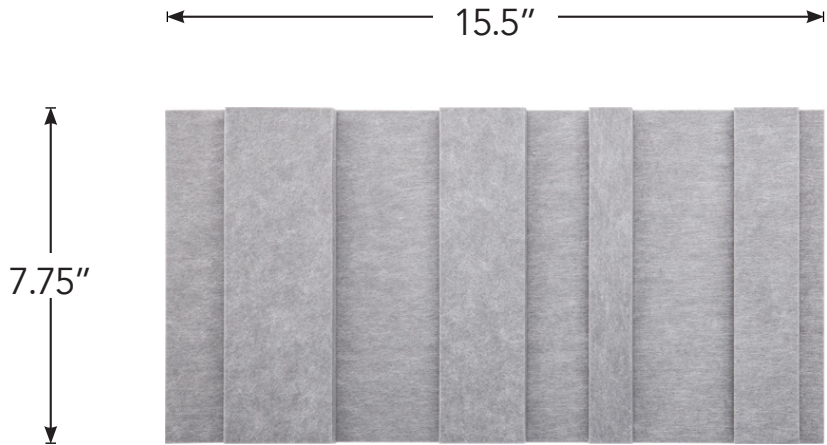

Front View

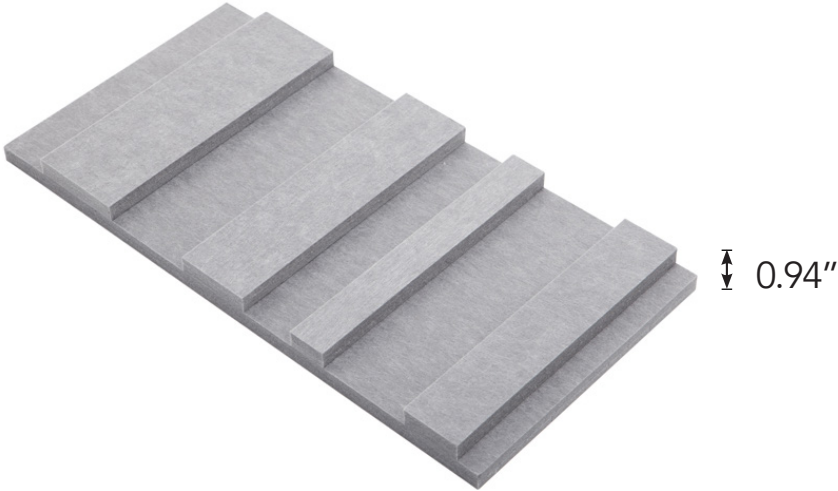

Side View

# Available Colors



Color variation between dye lots is a natural characteristic of recycled PET felt due to the manufacturing process. Slight differences between samples and finished product may occur.


# Installation

When mounting, use standard construction adhesives (e.g. Liquid Nails/Titebond - NOT PVA glue). Clean and prepare surface per adhesive guidelines. Spread adhesive evenly on panel back, leaving 2" space at edges. Adhere to wall surface, providing bracing to hold material against surface per adhesive open time/instructions. For more information, see the [Barcode Tile Installation Guide](#).

## Custom Printing with Kirei Ink

Barcode Tiles can be custom printed in house with Kirei Ink. We would love to work with you to print your own custom color, pattern, graphic or material. Reach out and our team will be ready to assist!

Please note: Kirei requires written permission from the copyright holder in order to reproduce any copyrighted work. Professional photographs cannot be reproduced without written permission from the photographer.

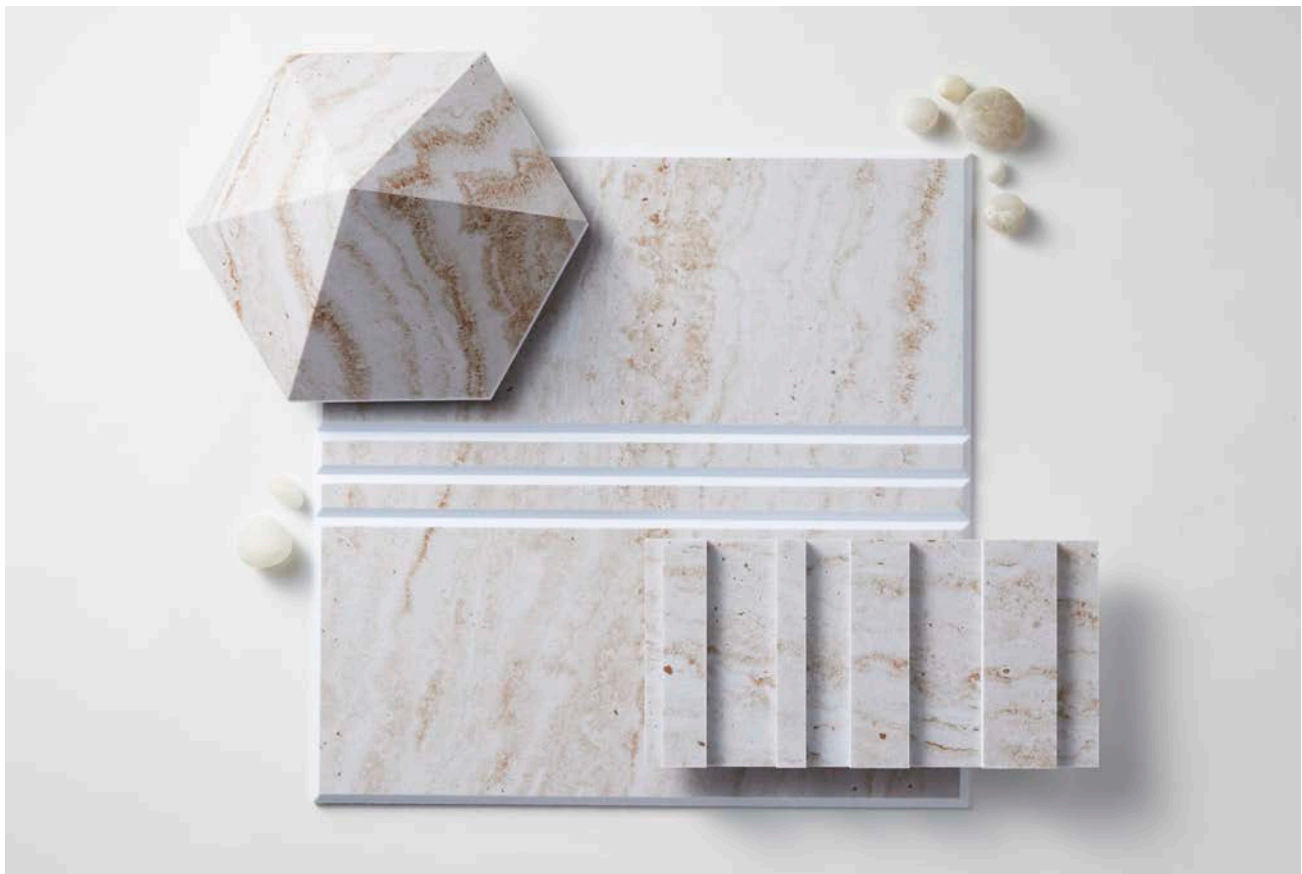

Product shown: Diamond Tile, Racetrack Path Tile, and Barcode Tile with Kirei Ink (Travertine)



Product shown: Barcode Tiles in Grey & Coronet



Product shown: Barcode Tiles in Frost, Lime Splice, & Grey



Product shown: Barcode Tiles in Grey



Product shown: Barcode Tiles in Smoke & Duck Egg

# kirei

Learn more and request your free sample:

619.236.9924 | [sales@kireiusa.com](mailto:sales@kireiusa.com)

[kireiusa.com](http://kireiusa.com)