



kirei

PIXEL TILES

Acoustic Tiles

Add visual appeal, texture and sound absorption to any flat wall with these 3D tiles! Designed to be staggered, rotated, or aligned, Pixel Tiles can be configured in numerous ways, offering a variety of design possibilities. Plus, the 36% layered coverage adds more sound absorption and diffusion! Installing Pixel Tiles is easy; simply use standard construction adhesive suitable for PET plastic and wall surfaces and you're all set!

Product shown: Pixel Tiles in Lime Splice

Specs

| Style | Standard (LxH) | Thickness | Weight/Box | Qty/Box | SF/Box |
|------------|----------------|-----------|------------|---------|--------|
| Pixel Tile | 10" x 10" | 0.94" | 7 lbs | 16 | 11.1 |

All specs refer to singular products and not multiples unless specified. Due to the nature of the material, cutting and fabrication process, minor dimensional variances may occur. Custom options available upon request.

| | |
|----------------|--|
| Designer | Kirei |
| Material | 100% PET (60% post-consumer recycled content) |
| Fire Rating | ASTM E84 Class A |
| Custom Options | Available upon request |
| Lead Time | Please refer to kireiusa.com for updated lead times. |
| VOC Emissions | CDPH (CA 01350) Compliant TVOC: <0.5 mg/m ³ |

*Actual lead times are determined when the project goes into production and can change based on production schedule and all quantities, color and thicknesses being in stock at time of order. See [Kirei's Product Lead Time Disclosure](#) for more information.




Acoustic Data


Sound Absorption

| Frequency | 250Hz | 500Hz | 800Hz | 1000Hz | 2000Hz | 4000Hz | NRC |
|------------------------|-------|-------|-------|--------|--------|--------|------|
| m ² /Object | 0.62 | 2.76 | 4.70 | 5.53 | 6.55 | 7.05 | 0.60 |


Acoustic data is measured in Sabins per Pixel Tile.

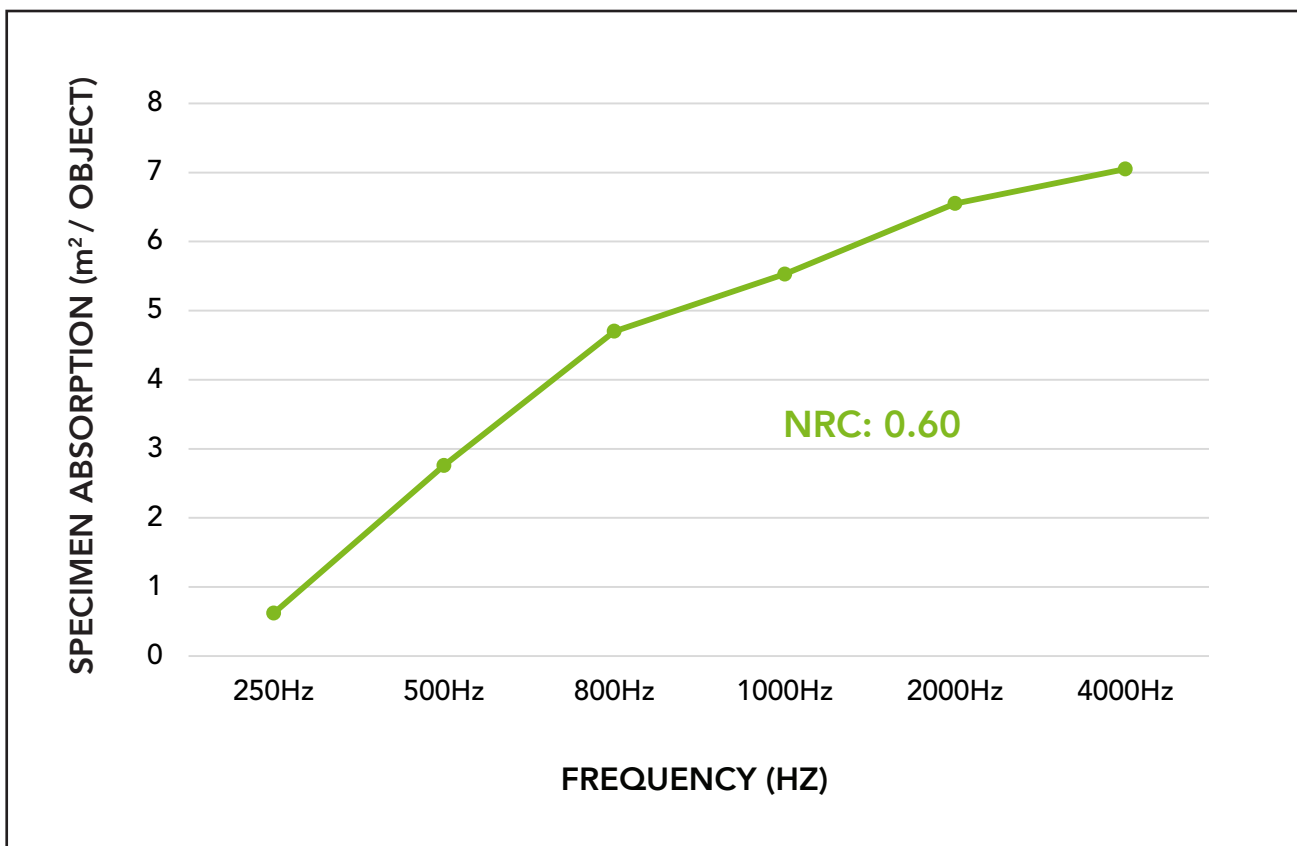

Product Dimensions

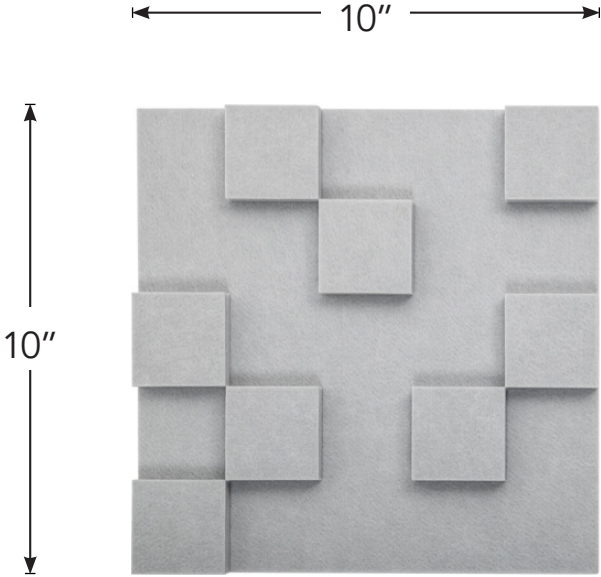

Front View

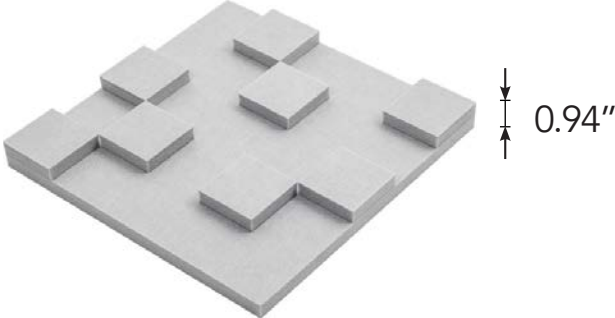

Side View

Available Colors



Color variation between dye lots is a natural characteristic of recycled PET felt due to the manufacturing process. Slight differences between samples and finished product may occur.

Installation

When mounting, use standard construction adhesives (e.g. Liquid Nails/Titebond - NOT PVA glue). Clean and prepare surface per adhesive guidelines. Spread adhesive evenly on panel back, leaving 2" space at edges. Adhere to wall surface, providing bracing to hold material against surface per adhesive open time/instructions. For more information, see the [Pixel Tile Installation Guide](#).

Custom Printing with Kirei Ink

Pixel Tiles can be custom printed in house with Kirei Ink. We would love to work with you to print your own custom color, pattern, graphic or material. Reach out and our team will be ready to assist!


Please note: Kirei requires written permission from the copyright holder in order to reproduce any copyrighted work. Professional photographs cannot be reproduced without written permission from the photographer.



Product shown: Pixel Tile Olive and Kirei Ink (Grasscloth)



Product shown: Pixel Tiles in Mandarin and Grey

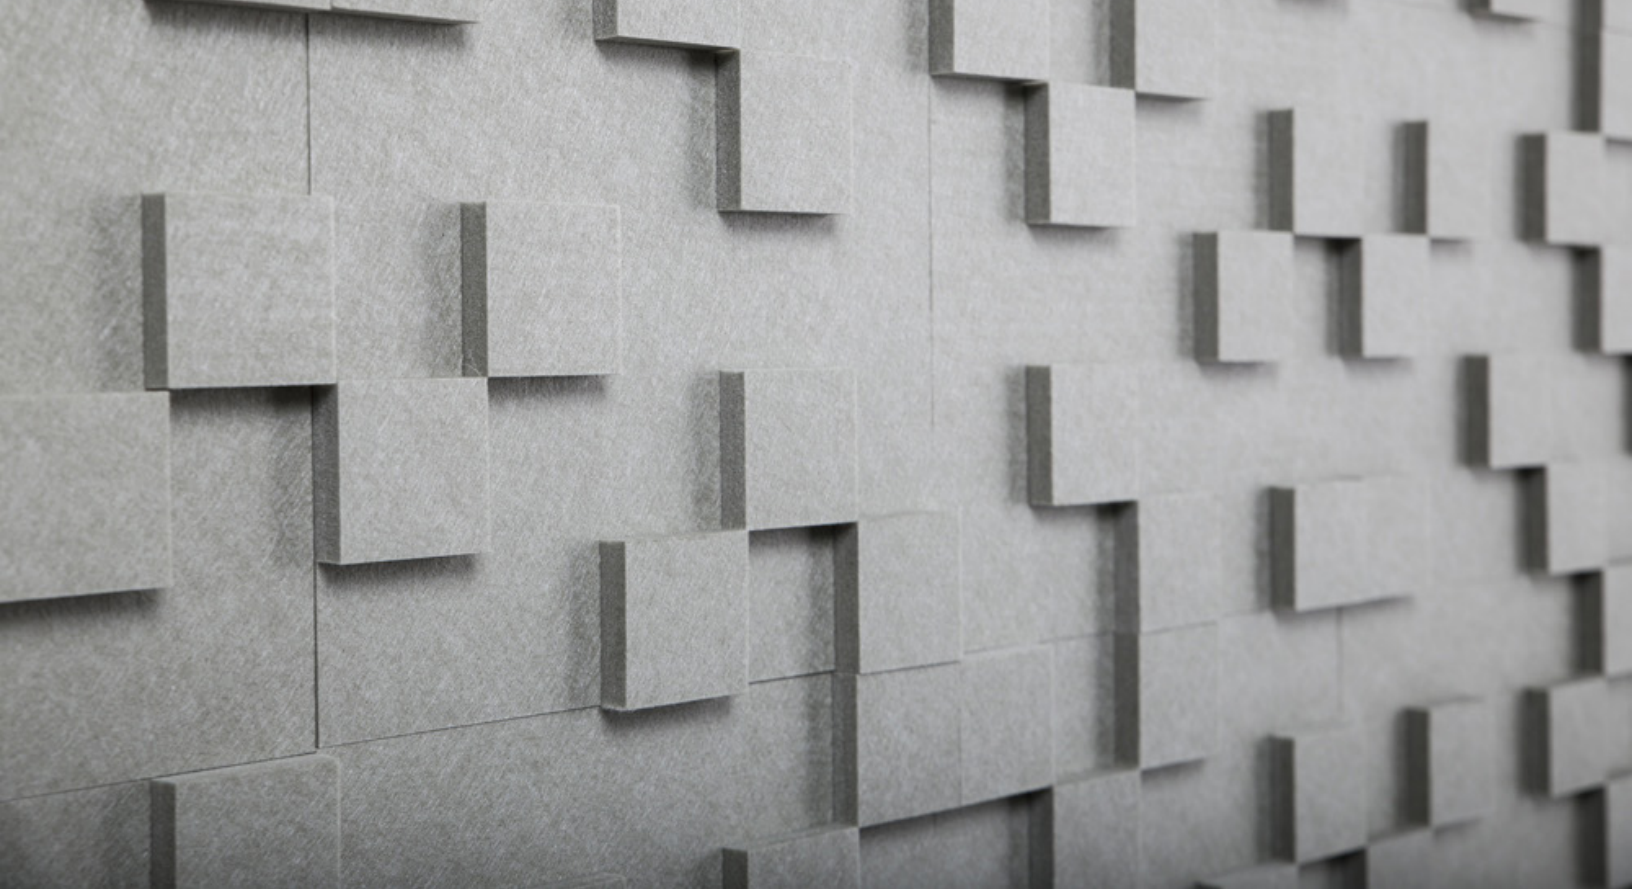

Product shown: Pixel Tiles in Smoke



Product shown: Pixel Tiles in Smoke



Product shown: Pixel Tiles in Lime Splice

kirei

Learn more and request your free sample:

619.236.9924 | sales@kireiusa.com

kireiusa.com