



# kirei

## RAMP TILES

### Acoustic Tiles

Infuse large-scale texture while lowering noise levels with the linear look and open-core design of the Ramp Tile. 46" in length with an air gap to capture excess sound waves, Ramp Tiles can be installed in horizontal or vertical orientations to quickly create aesthetically elevated and acoustically impactful walls. Available in over 35 colors with the option for Kirei Ink printing, Ramp Tiles are easily installed with construction adhesive.

Product shown: Ramp Tiles in Smoke, Vanilla with Kirei Ink (Pine)

# Specs

Style	Standard (LxW)	Depth	Weight/Tile	SF/Tile
Ramp Tile	46" x 6"	2.88"	3 lbs	1.92 ft <sup>2</sup>

All specs refer to singular products and not multiples unless specified. Due to the nature of the material, cutting and fabrication process, minor dimensional variances may occur.

Designer Kirei/Michael DiTullo

Material 100% PET (60% recycled content)

Fire Rating ASTM E84 Class A

Custom Options Available upon request

Lead Time Please refer to [kireiusa.com](http://kireiusa.com) for updated lead times.

VOC Emissions CDPH (CA 01350) Compliant  
TVOC: <0.5 mg/m<sup>3</sup>



**Declare.**




\*Actual lead times are determined when the project goes into production and can change based on production schedule and all quantities, color and thicknesses being in stock at time of order. See [Kirei's Product Lead Time Disclosure](#) for more information.



# Product Dimensions


Ramp Tile

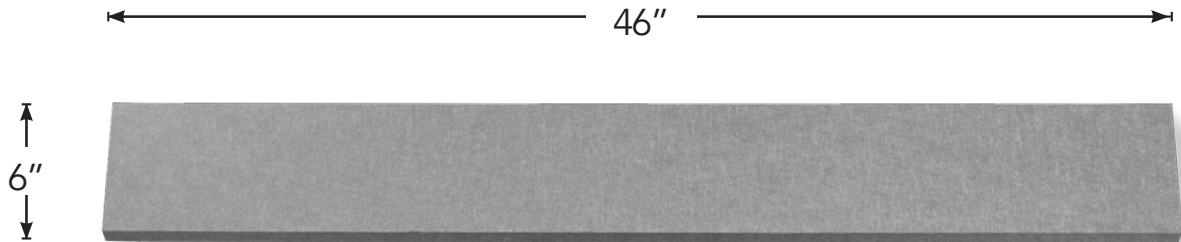


Front View



Side View

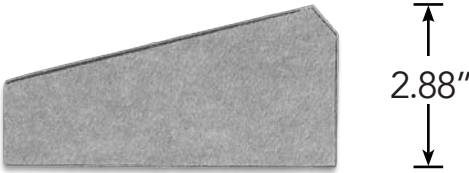

Side View

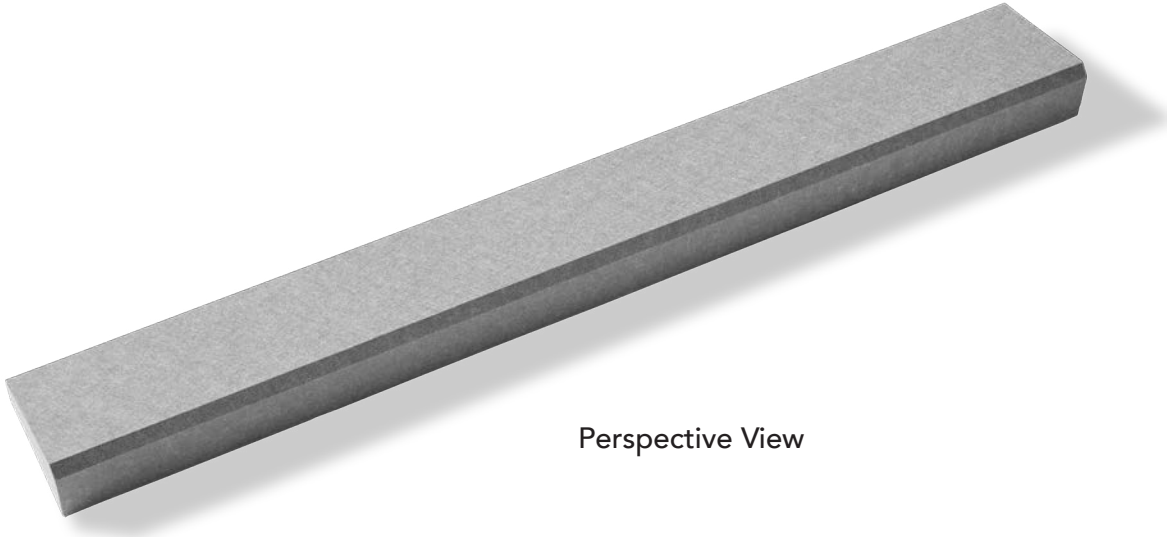


Perspective View

# Acoustic Data

## Ramp Tile Sound Absorption

Frequency	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	NRC	SAA
Abs. Coeff (No Air Gap)	0.23	0.70	1.20	1.19	1.16	1.11	1.05	1.06

Acoustic data is measured in Absorption Coefficient per square foot of material. For more information, see the [full acoustic test](#).

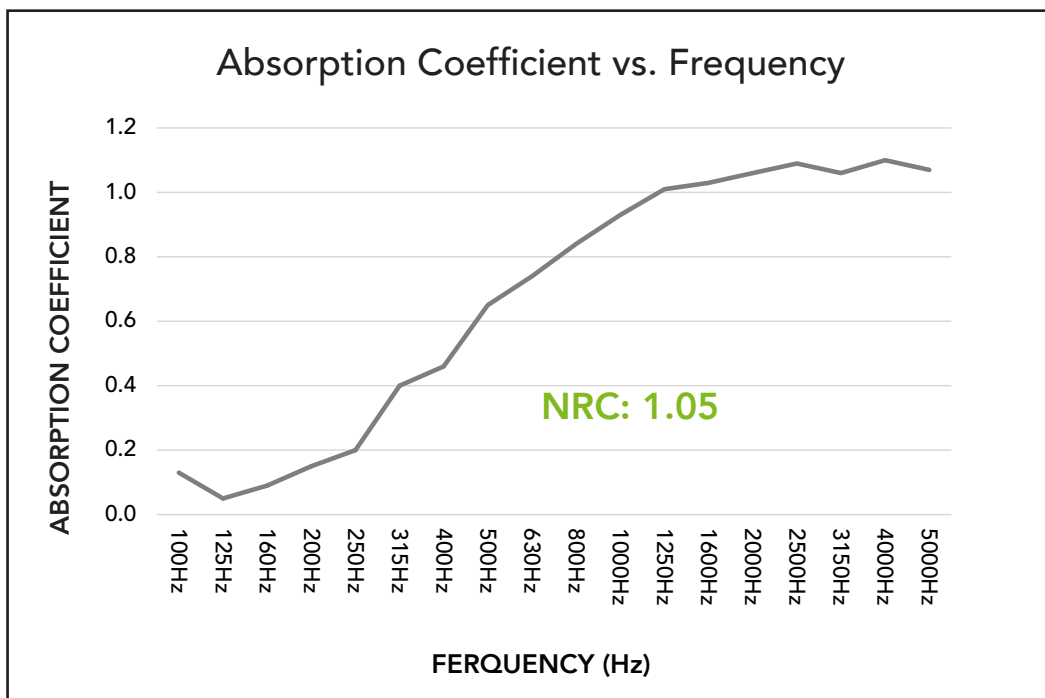

# Available Colors



Color variation between dye lots is a natural characteristic of recycled PET felt due to the manufacturing process. Slight differences between samples and finished product may occur.

# Installation

When mounting, use standard construction adhesives (e.g. Liquid Nails/Titebond - NOT PVA glue). Clean and prepare surface per adhesive guidelines. Spread adhesive evenly on the back of the tile, leaving room at the edges for glue to spread. After applying adhesive, mount tiles per layout and maintain even pressure per adhesive manufacturer instructions. Clean any excess adhesive. For more information, see the [Ramp Tiles Installation Guide](#).

# Custom Printing with Kirei Ink

Ramp Tiles can be custom printed in house with Kirei Ink. Deliver endless customization possibilities from the natural beauty of botanicals to subtle or striking stonework. Pick from more than 50 prints over Kirei Ink's four collections or print your own custom color, pattern, graphic or material. We would love to work with you. Reach out and our team will be ready to assist!

*Please note: Kirei requires written permission from the copyright holder in order to reproduce any copyrighted work. Professional photographs cannot be reproduced without written permission from the photographer. Keep in mind printing is not on the edges of the fully assembled product.*



Product shown: Ramp Tiles in Smoke and Vanilla with Kirei Ink (Pine)



Product shown: Ramp Tiles in Navy, Slate, and Vanilla with Kirei Ink (Pine)



Product shown: Ramp Tiles in Navy, Slate, and Vanilla with Kirei Ink (Pine)



Product shown: Ramp Tiles in Frost, Navy, Slate, and Vanilla with Kirei Ink (Pine)



Product shown: Ramp Tiles in Frost and Vanilla with Kirei Ink (Pine)

# kirei

Learn more and request your free sample:

619.236.9924 | [sales@kireiusa.com](mailto:sales@kireiusa.com)

[kireiusa.com](http://kireiusa.com)