

Specs

Style	Standard (LxH)	Depth	Weight/Box	Qty/Box	SF/Box
Dune Tile	19.69 in. x 19.69 in.	1.97 in	10 lbs	9	24.21

All specs refer to singular products and not multiples unless specified. Due to the nature of the material, cutting and fabrication process, minor dimensional variances may occur. Custom options available upon request.

Designer	Woven Image			
Material	Tiles: 100% PET (27% post-consumer recycled) Clips: Polycarbonate resin			
Fire Rating	ASTM E84 Class A			
Custom Options	Available upon request			
Lead Time	*In stock for immediate shipment			
VOC Emissions	CDPH (CA 01350) Compliant TVOC: <0.5 mg/m3 Ecospecifier GreenTag Compliant TVOC: 0.015 mg/m2/hr (ASTM D5116)			

^{*}Actual lead times are determined when the project goes into production and can change based on production schedule and all quantities, color and thicknesses being in stock at time of order. See Kirei's Product Lead Time Disclosure for more information.














Acoustic Data


Sound Absorption

Frequency	250Hz	500Hz	800Hz	1000Hz	2000Hz	4000Hz	NRC
m²/Object	1.20	5.40	6.70	7.20	8.90	8.50	0.60

Acoustic data is measured in Sabins per Dune Tile.

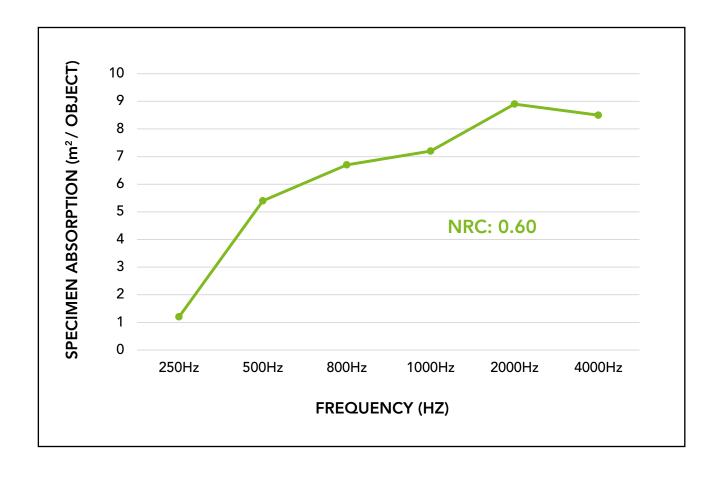

Product Detail

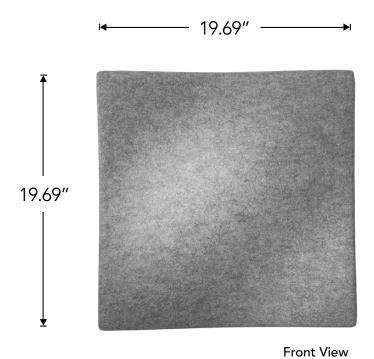

TIONE VIEW




Side View


Available Colors



Installation

Each box includes 9 tiles and a bag of mixed clips appropriate for a 3 tile by 3 tile installation. Other layouts will require extra clips, available through Kirei. See the <u>Wave Tiles Installation Guide</u> for more information.







Product shown: Dune Tiles in Color 487 (Blush)



Product shown: Dune Tiles in Color 542 (Black)



Product shown: Dune Tiles in Color 908 (Cream)

kirei

Learn more and request your free sample: 619.236.9924 | sales@kireiusa.com kireiusa.com

All images in this spec sheet are supplied by Woven Image®.