

parts installs easily and creates a unique ceiling addition to any open space.

Specs

Style	Standard (LxW)	Baffle Depth	Baffles/Rack	Weight/Unit	SF/Unit
Configuration A	40 in. x 48 in.	9 in.	8	12mm: 20.8 lbs 24mm: 23.8 lbs	13.33
Configuration B	48 in. x 48 in.	9 in.	8	12mm: 24 lbs 24mm: 27 lbs	16
Configuration C	72 in. x 48 in.	9 in.	8	12mm: 36.4 lbs 24mm: 38.4 lbs	24
Configuration D	96 in. x 48 in.	9 in.	8	12mm: 46.4 lbs 24mm: 49.4 lbs	32
Configuration E	40 in. x 96 in.	9 in.	16	12mm: 40.5 lbs 24mm: 46.5 lbs	26.67
Configuration F	48 in. x 96 in.	9 in.	16	12mm: 47 lbs 24mm: 53 lbs	32
Configuration G	72 in. x 96 in.	9 in.	16	12mm: 69.4 lbs 24mm: 75.4 lbs	48
Configuration H	96 in. x 96 in.	9 in.	16	12mm: 89.5 lbs 24mm: 95.5 lbs	64
Configuration I	40 in. x 96 in.	11.5 in.	8	12mm: 27.1 lbs 24mm: 30.1 lbs	26.67
Configuration J	48 in. x 96 in.	11.5 in.	8	12mm: 31.4 lbs 24mm: 34.4 lbs	32
Configuration K	72 in. x 96 in.	11.5 in.	8	12mm: 44.8 lbs 24mm: 47.8 lbs	48
Configuration L	96 in. x 96 in.	11.5 in.	8	12mm: 58.2 lbs 24mm: 61.2 lbs	64

All specs refer to singular products and not multiples unless specified. Due to the nature of the material, cutting and fabrication process, minor dimensional variances may occur. Custom options available upon request. See configurations for design options.

Specs

Designer	Kirei			
Panel Thickness	12mm & 24mm			
Material	100% PET (60% post-consumer recycled)			
NRC	Contact Kirei for this test data.			
Fire Rating	ASTM E84 Class A			
Custom Options	Available upon request			
Lead Time	*4-6 weeks (1-100 panels) For larger quantities, lead times determined per order			
VOC Emissions	CDPH (CA 01350) Compliant TVOC: <0.5 mg/m3 Ecospecifier GreenTag Compliant TVOC: 0.015 mg/m2/hr (ASTM D5116)			

Red List Free Declare.











^{*}Actual lead times are determined when the project goes into production and can change based on production schedule and all quantities, color and thicknesses being in stock at time of order. See <u>Kirei's Product Lead Time Disclosure</u> for more information.

Product Dimensions

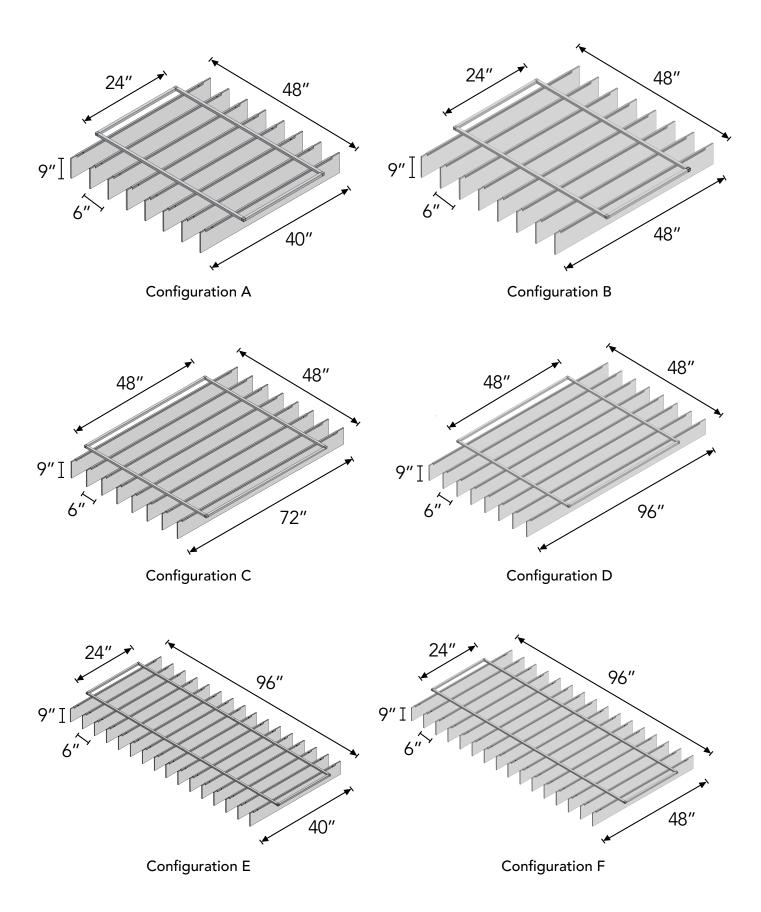

Product Dimensions

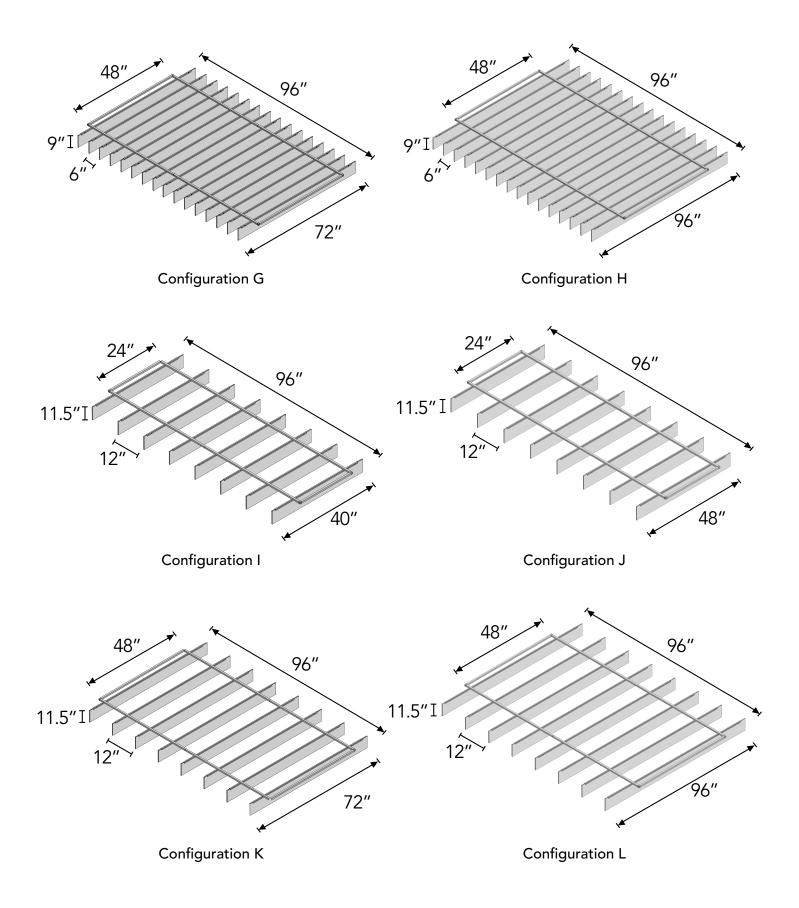

Available Colors




Color variation between dye lots is a natural characteristic of recycled PET felt due to the manufacturing process. Slight differences between samples and finished product may occur.

Installation

Each EchoSky set comes as a kit of parts including: Simple Baffles, pre-drilled lightweight aluminum rack tubing, corner connectors, aluminum channel tracks with set screws and eyebolts for hanging. For more information, see the EchoSky Installation Guide.

<u>Please note</u>: Kirei does not provide aircraft cable or ceiling hardware.

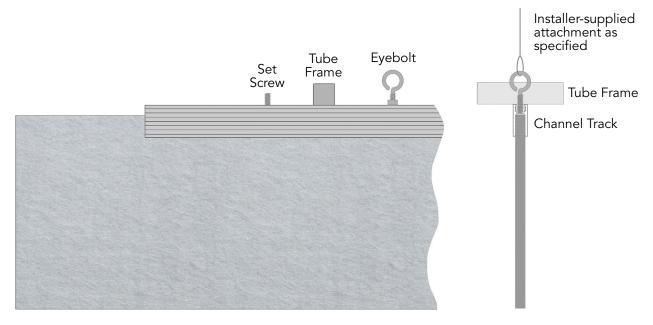


EchoSky Close-up View

Custom Printing with Kirei Ink

EchoSky can be custom printed in house with Kirei Ink. We would love to work with you to print your own custom color, pattern, graphic or material. Reach out and our team will be ready to assist!


<u>Please note</u>: Kirei requires written permission from the copyright holder in order to reproduce any copyrighted work. Professional photographs cannot be reproduced without written permission from the photographer.

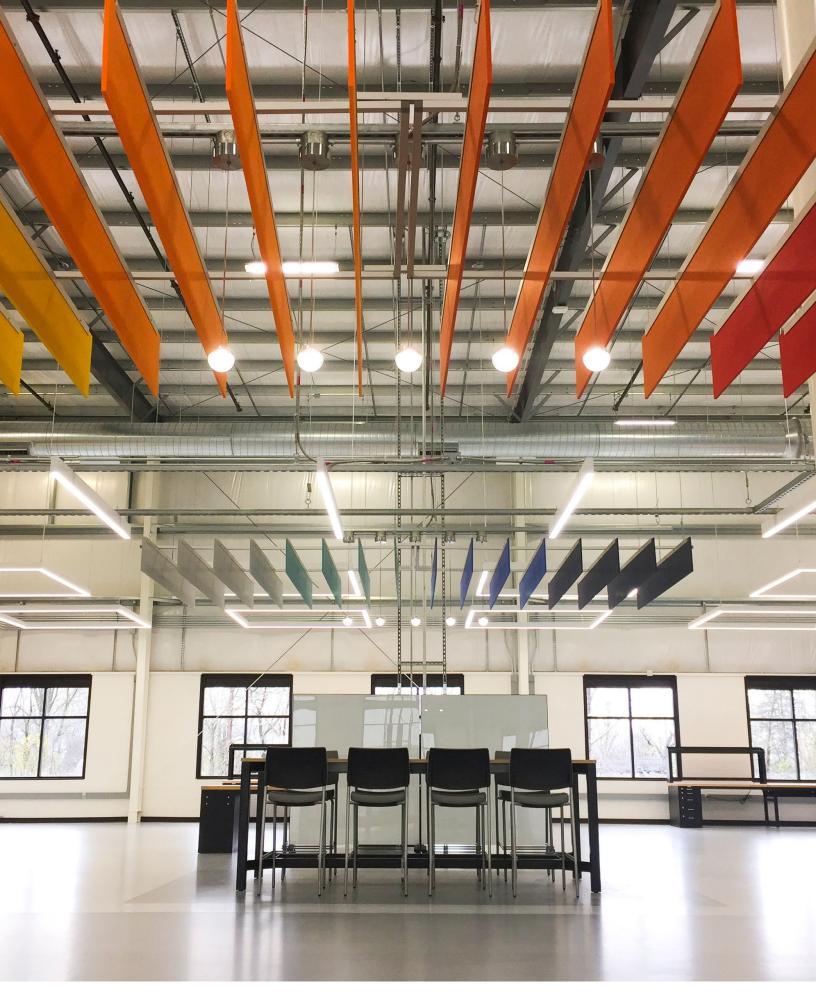

Product shown: EchoSky in Colors 101 (Frost), 108 (Sunshine), 151 (Orange), 258 (Red), 273 (Blue), 295 (Mandarin), 444 (Smoke), 542 (Black), & 551 (Duck Egg)



Product shown: Custom EchoSky in Color 500 (White)

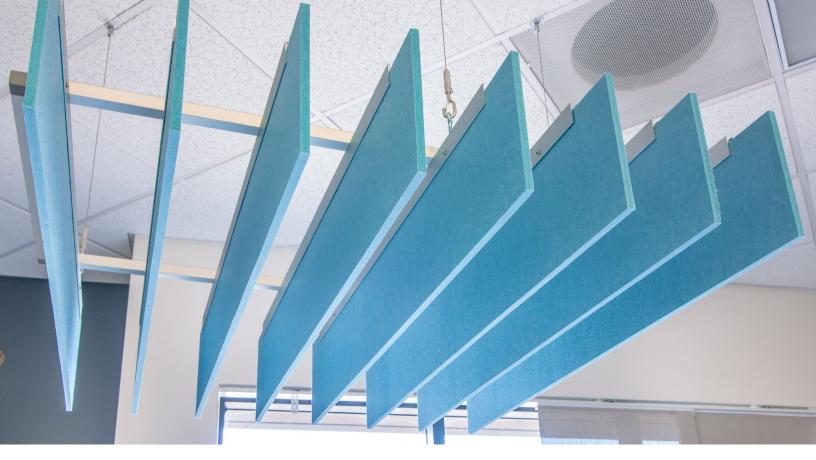

Product shown: EchoSky in Color 551 (Duck Egg)



Product shown: EchoSky in Color 551 (Duck Egg)



Product shown: EchoSky in Color 487 (Blush)

kirei

Learn more and request your free sample:

619.236.9924 | sales@kireiusa.com kireiusa.com