

Outdoor Wave-to-Open Sensors

Installation Manual




Language	Slimline	Single-Gang	European Plate*	Double-Gang
English	SD-9163-KSQ	SD-9263-KSQ	SD-9363-KSQ	
Spanish	SD-9163-KS1Q	SD-9263-KS1Q	SD-9363-KS1Q	
French	SD-9163-KS2Q	SD-9263-KS2Q	SD-9363-KS2Q	
English w/ mechanical override button	SD-9163-KSVQ	SD-9263-KSVQ	SD-9363-KSVQ†	SD-9463-KSVQ†

*European plate versions are not ETL certified. †Spanish and French faceplates also available for these models by special order.

The ENFORCER Outdoor Wave-to-Open Sensor is a full-featured exit plate using IR technology to allow egress from a protected area or activate a device with the simple wave of a hand. Since no touch is required, this sensor is suitable for use in hospitals, clinics, labs, cleanrooms (to reduce the risk of contamination), schools, factories, or offices.

- Adjustable sensor range up to 7" (18cm)
- 1.2A relay, adjustable trigger duration 0.8~30 seconds or toggle
- LED illuminated sensor are for easy identification
- Selectable LED colors turns from red to green (or green to red) when the sensor is activated
- Stainless steel plate
- IP65 Weather-resistant for outdoor use
- Power must be provided by low-voltage power-limited/Class 2 power supply

Wiring Diagram

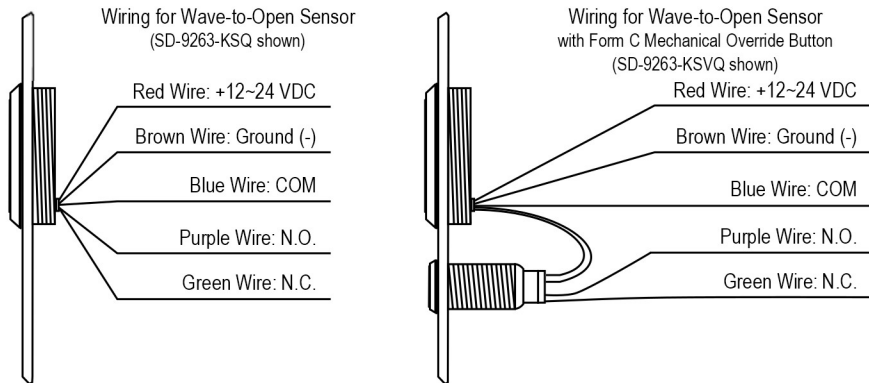


Installation

1. Run four wires through the wall to a corresponding back box. Use only low-voltage, power-limited/Class 2 field wiring and do not exceed 98.5ft (30m).
2. Connect the 4 wires from the back box to the sensor according to the *Wiring Diagram* above.
3. For weatherproof installation, use a waterproof back box and apply a bead of silicone sealant (not included) around the rim of the back box and faceplate edge. Apply a small amount of sealant below each screw head.
4. Screw the plate into the back box, taking care not to crimp the wires and ensuring a good seal.
5. Remove clear protective film from the sensor before use.


WARNING: Do not connect any device that will exceed 1.2A@24VDC.

Changing the LED Color

Slimline Models




Other Models

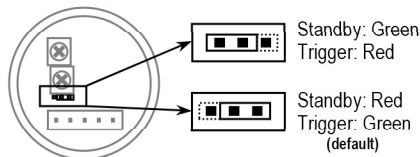


Adjusting the Sensor Range and Output Duration

1. The sensor range can be adjusted from 2"~7" (5~18 cm).
2. Output duration can be adjusted from 0.8~30 seconds or toggle.*

NOTE: Do not force the adjustment trimpots to turn. Only minimal force is needed

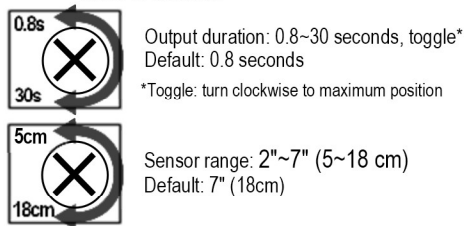


Slimline Sensor Layout



Other Sensors Layout

Sample Installation

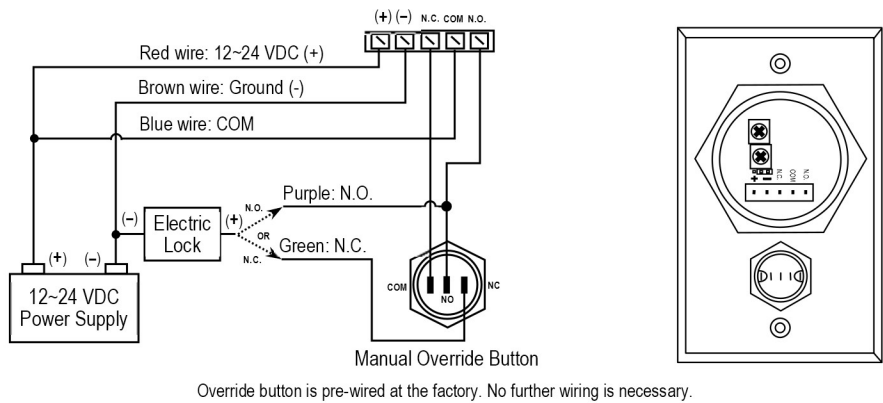

Troubleshooting

Sensor triggers unexpectedly	• Ensure that no strong direct or reflected light source is reaching the sensor. • Ensure that sensor is sheltered from direct sunlight.
Sensor remains triggered	• Check that nothing is remaining in range of the sensor including a cone of 60° from the centerline. • Reduce the IR range of the sensor. • Ensure that the sensor's output duration potentiometer is not turned to maximum • Check that the power voltage is within the sensor's specifications.
Sensor will not trigger	• Increase the IR range of the sensor. • Check that the power voltage is within the sensor's specifications.

Care and Cleaning

The sensor requires special care to ensure reliability and a long operating life.

1. Use a soft, clean, preferably microfiber cloth for cleaning. Use the mildest type of cleaner available.
2. When cleaning, spray the cleaning solution onto the cleaning cloth instead of the unit.
3. Be sure to wipe off any excess liquid from the sensor. Wet spots may affect the sensor's performance.

IMPORTANT WARNING: For a weather-resistant installation, ensure that the unit is installed in a waterproof back box, and that the faceplate and faceplate screws are properly sealed. Incorrect mounting may lead to exposure to rain or moisture inside which could cause a dangerous electric shock, damage the device, and void the warranty. Users and installers are responsible for ensuring that this product is properly installed and sealed.

IMPORTANT: Users and installers of this product are responsible for ensuring that the installation and configuration of this product complies with all national, state, and local laws and codes. SECO-LARM will not be held responsible for the use of this product in violation of any current laws or codes.

California Proposition 65 Warning: These products may contain chemicals which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

WARRANTY: This SECO-LARM product is warranted against defects in material and workmanship while used in normal service for one (1) year from the date of sale to the original customer. SECO-LARM's obligation is limited to the repair or replacement of any defective part if the unit is returned, transportation prepaid, to SECO-LARM. This Warranty is void if damage is caused by or attributed to acts of God, physical or electrical misuse or abuse, neglect, repair or alteration, improper or abnormal usage, or faulty installation, or if for any other reason SECO-LARM determines that such equipment is not operating properly as a result of causes other than defects in material and workmanship. The sole obligation of SECO-LARM and the purchaser's exclusive remedy, shall be limited to the replacement or repair only, at SECO-LARM's option. In no event shall SECO-LARM be liable for any special, collateral, incidental, or consequential personal or property damage of any kind to the purchaser or anyone else.

NOTICE: The SECO-LARM policy is one of continual development and improvement. For that reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is also not responsible for misprints. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. Copyright © 2022 SECO LARM U.S.A., Inc. All rights reserved.

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606
Phone: (949) 261-2999 | (800) 662-0800

Website: www.seco-larm.com
Email: sales@seco-larm.com

 PITSW1
Order Part# 763-171-9%
MI_SD-9x63-KSxQ_Z20315.docx