

# **Specs**

Style	Standard (LxH)	Depth	Weight/Box	Qty/Box	SF/Box
Level	≈ 29 in. x 108 in.	2 in.	20 lbs	10	21.75
Pulse	≈ 29 in. x 108 in.	1.5-2.75 in.	20 lbs	10	21.75
Wave	≈ 29 in. x 108 in.	2 in.	18 lbs	10	21.75

A box comes with 10 fins and 10 slabs. When fins and slabs are assembled, the product measures  $\approx$  29 in. (length). All specs refer to singular products and not multiples unless specified. Due to the nature of the material, cutting and fabrication process, minor dimensional variances may occur.

Designer	Kirei				
Panel Thickness	12mm				
Material	100% PET (60% post-consumer recycled)				
Fire Rating	ASTM E84 Class A				
Custom Options	Available upon request				
Lead Time	*4-6 weeks For larger quantities, lead times determined per order				
VOC Emissions	CDPH (CA 01350) Compliant TVOC: <0.5 mg/m3 Ecospecifier GreenTag Compliant TVOC: 0.015 mg/m2/hr (ASTM D5116)				

<sup>\*</sup>Actual lead times are determined when the project goes into production and can change based on production schedule and all quantities, color and thicknesses being in stock at time of order. See <u>Kirei's Product Lead Time Disclosure</u> for more information.












#### **Acoustic Data**


# Sound Absorption


Frequency	250Hz	500Hz	800Hz	1000Hz	2000Hz	4000Hz	NRC
m²/Object	0.87	2.94	4.42	4.82	5.35	6.62	0.50


Acoustic data is measured in Sabins per Fin system.

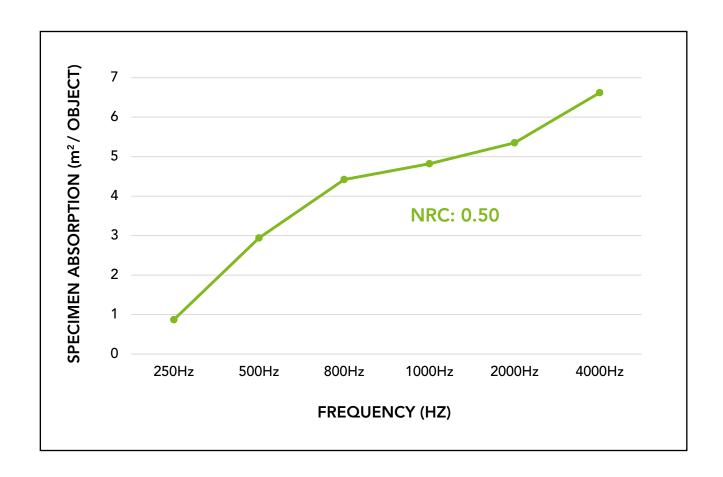



#### **Product Dimensions**

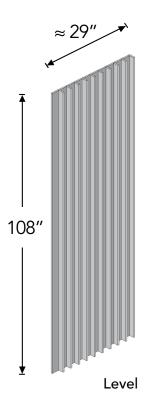


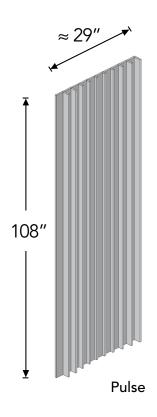


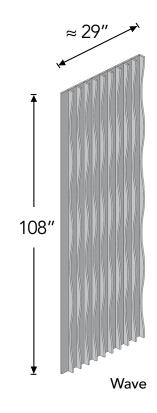















Pulse Fin View

Wave Fin View

#### **Available Colors**



Color variation between dye lots is a natural characteristic of recycled PET felt due to the manufacturing process. Slight differences between samples and finished product may occur.


#### Installation

When mounting, use standard construction adhesives (e.g. Liquid Nails/Titebond - NOT PVA glue). Clean and prepare surface per adhesive guidelines. Spread adhesive evenly on panel back. Adhere to wall surface, providing bracing to hold material against surface per adhesive open time/instructions. For more information, see the <a href="Fins Installation Guide">Fins Installation Guide</a>.

### **Custom Printing with Kirei Ink**

Fins can be custom printed in house with Kirei Ink. We would love to work with you to print your own custom color, pattern, graphic or material. Reach out and our team will be ready to assist!

<u>Please note</u>: Kirei requires written permission from the copyright holder in order to reproduce any copyrighted work. Professional photographs cannot be reproduced without written permission from the photographer.

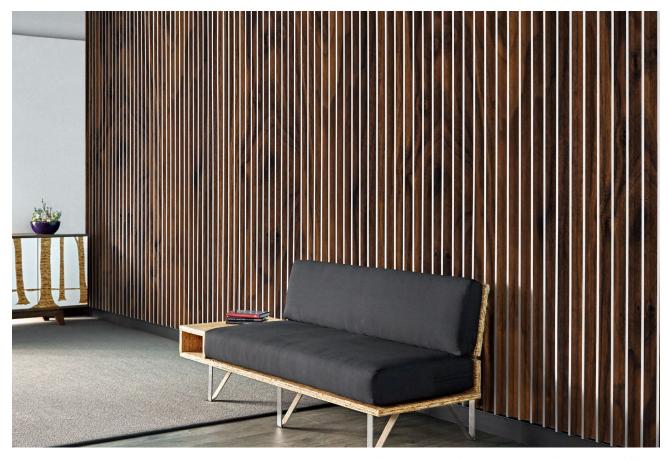

Product shown: Level Fins in Kirei Ink (Dark Walnut)



Product shown: Level Fins in Color 349 (Vineyard)




Product shown: Wave Fins in Color 338 (Jade)




Product shown: Pulse Fins in Color 660 (Coronet)




Product shown: Level Fins Custom Logo in Color 274 (Orchid)

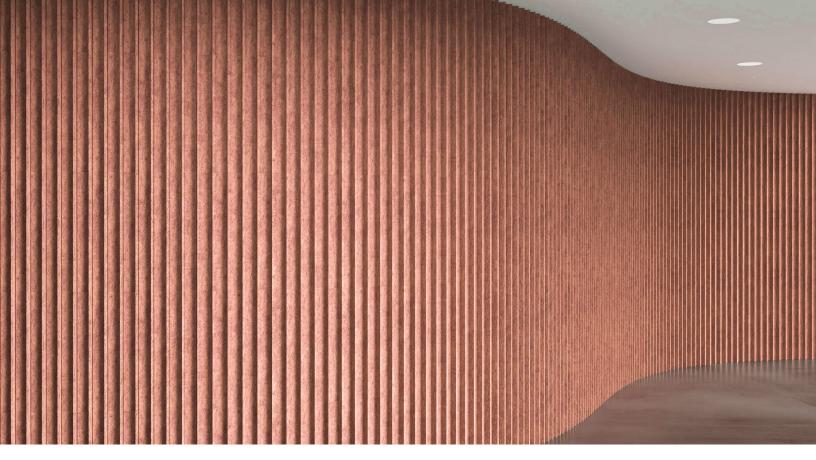


Product shown: Level Fins with Curved Wall Installation in Color 487 (Blush)

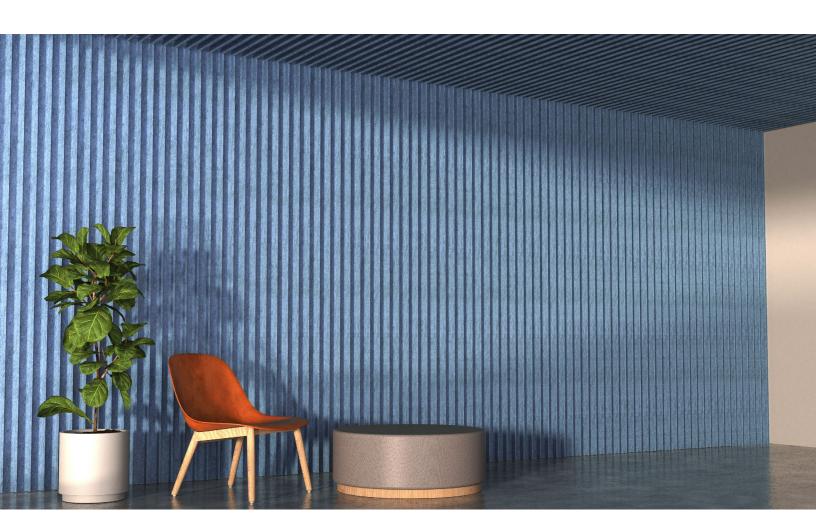

Product shown: Level Fins with Wall and Ceiling Installation in Color 660 (Coronet)

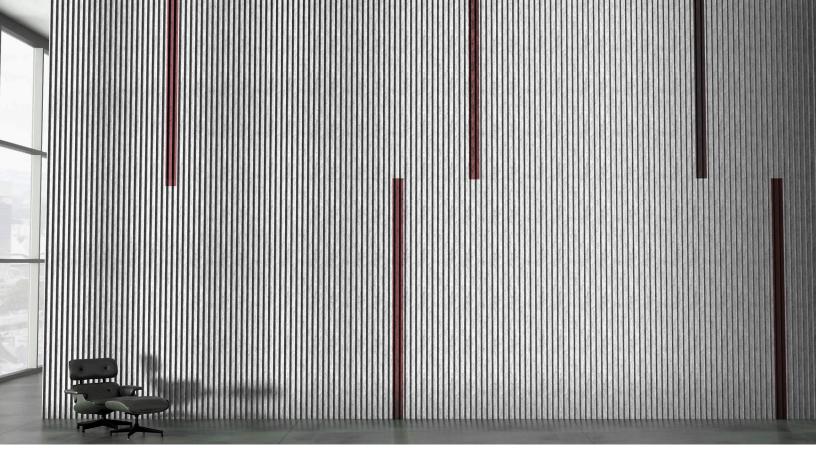

Product shown: Level Fins in Colors 442 (Grey) and 269 (Wine)

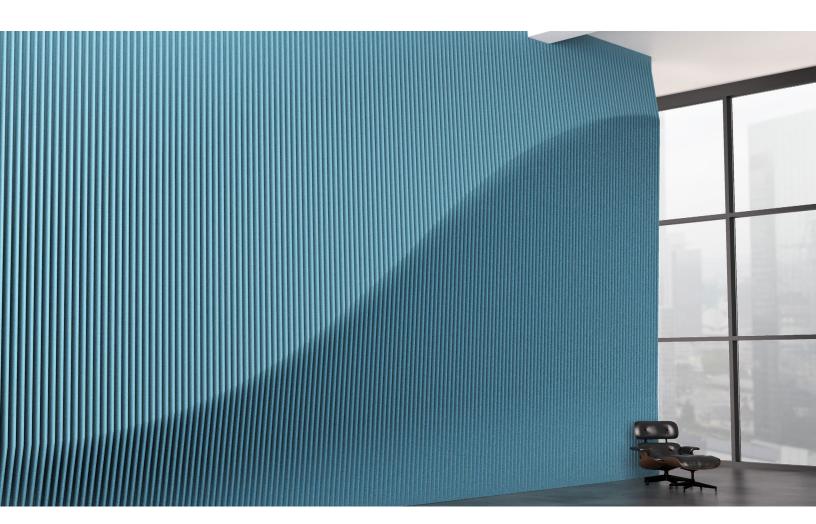

Product shown: Fins Custom Traveling Peaks in Color 551 (Duck Egg)



Product shown: Fins Custom Triangles in Color 276 (Lavender)

# kirei

Learn more and request your free sample: 619.236.9924 | sales@kireiusa.com kireiusa.com