

# **Specs**

Style	Standard (LxH)	Thickness	Weight/Unit	SF/Unit
12mm Screen	46 in. x 108 in.	0.47 in	19 lbs	34.5
24mm Screen	46 in. x 108 in.	0.94 in	22 lbs	34.5

All specs refer to singular products and not multiples unless specified. Due to the nature of the material, cutting and fabrication process, minor dimensional variances may occur. If ordering in 24mm thickness, certain designs will have to be modified to accommodate this thickness. Custom options available upon request. EchoScreen is sold individually and ships flat.

Designer	Kirei/Michael DiTullo		
Panel Thickness	12mm & 24mm		
Material	100% PET (60% post-consumer recycled)		
NRC	Contact Kirei for this test data.		
Fire Rating	ASTM E84 Class A		
Custom Options	Available upon request		
Lead Time	*12mm - 4-6 weeks (1-50 screens) *12mm - 6-8 weeks (50+ screens) *24mm - 10-12 weeks For larger quantities, lead times determined per order		
VOC Emissions	CDPH (CA 01350) Compliant TVOC: <0.5 mg/m3 Ecospecifier GreenTag Compliant TVOC: 0.015 mg/m2/hr (ASTM D5116)		

<sup>\*</sup>Actual lead times are determined when the project goes into production and can change based on production schedule and all quantities, color and thicknesses being in stock at time of order.

See <u>Kirei's Product Lead Time Disclosure</u> for more information.













# **Product Dimensions**

### **Channel Track Dimension**

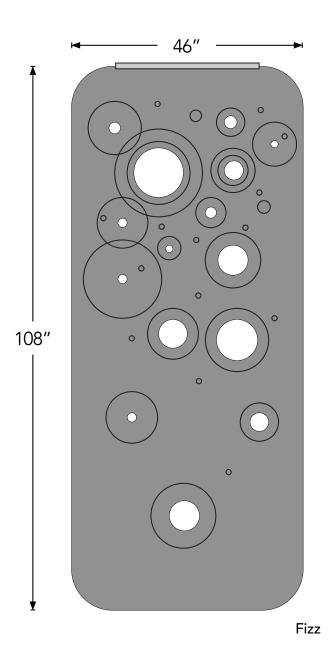



# **Available Colors**



Color variation between dye lots is a natural characteristic of recycled PET felt due to the manufacturing process. Slight differences between samples and finished product may occur.


## Installation

#### Walls

EchoScreen may be mounted on walls using adhesive, screws, or standoffs.

### Ceiling

Each standard EchoScreen includes our proprietary aluminum channel track, plus two attachment hardware sets. Hanging options include 1/4"-20 set screw and eyebolt fasteners to enable hanging with cable, rod and other premium hanging hardware.

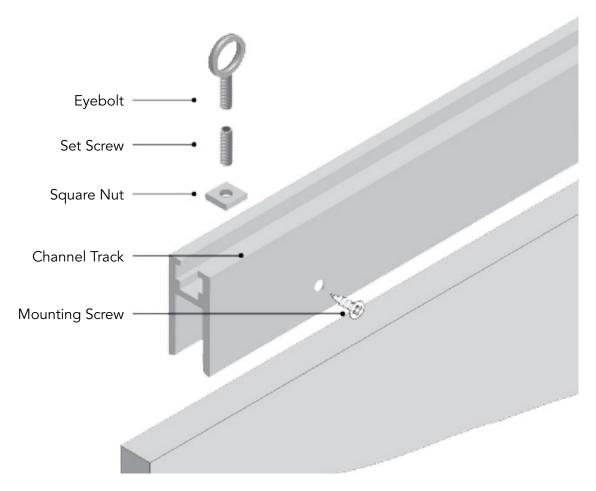


EchoScreen with Channel Track

### Installation

#### **Rolling Track**

EchoScreen may be used as a moveable wall element by mounting panels using the EchoScreen Rolling Track. The Rolling Track can be installed in continuous runs, or side-by-side for bypass or overlapping screens.

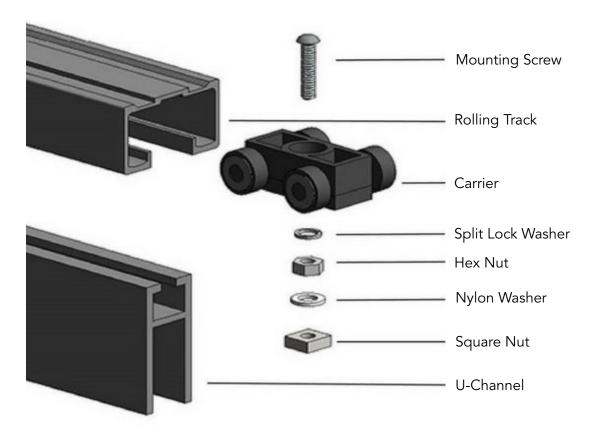

EchoScreen with Rolling Track

#### Install Guide

For instructions on how to install in a variety of ways and additional hardware capabilities, see the EchoScreen Installation Guide.

### **Custom Patterns**

Have a design in mind for EchoScreen? Custom patterns are available, bring us your design! <u>Contact Kirei</u> for information on how to create custom EchoScreen patterns for your project.

# **Custom Printing with Kirei Ink**

EchoScreen can be custom printed in house with Kirei Ink. We would love to work with you to print your own custom color, pattern, graphic or material. Reach out and our team will be ready to assist!

<u>Please note</u>: Kirei requires written permission from the copyright holder in order to reproduce any copyrighted work. Professional photographs cannot be reproduced without written permission from the photographer.



Product shown: Fizz Screens in Color 447 (Slate) with Kirei Ink (Custom Print)



Product shown: Fizz Screens in Colors 444 (Smoke) and Color 660 (Coronet) with White Print



Product shown: Fizz Screens in Color 124 (Ochre) with Kirei Ink (Custom Print)



Product shown: Fizz Screens in Color 101 (Frost) with White Print

# kirei

Learn more and request your free sample: 619.236.9924 | sales@kireiusa.com kireiusa.com