

HD-TVI Discreet Ceiling Mounted Camera

● ITEM №: VL562T

Photo 1:


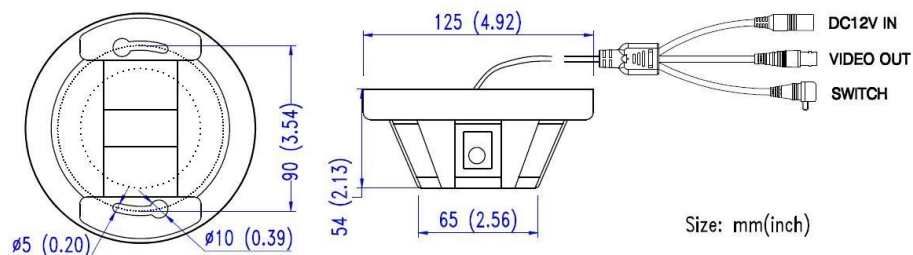


Photo 2:

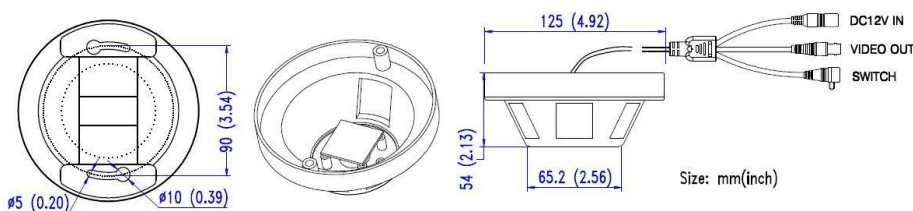

● Packing


- | | |
|---------------------------|----|
| 1. Camera | X1 |
| 2. User Manual | X1 |
| 3. Screw | X2 |
| 4. Plastic-Conical-Anchor | X2 |
| 5. Mounting drawing paper | X1 |
| 6. Power Connector Cable | X1 |

● Specification

ITEM	VL562T
IP Rating	IP55
Type	Color
Signal System	NTSC/PAL
Pick Up Device	1/2.9" 2.2 Mega Pixels CMOS
Picture Elements	1920(H)X1080(V)
Min Illumination	0.001Lux
S/N Ratio	≥52dB
Lens	3.7mm pinhole lens
3D/2D	ON
SENS-UP	ON
IR SMART	ON
White Balance	ATW
Back Light Compensation	OFF
DWDR	ON/OFF
OSD	With UTC Signal(DVR Control OSD)
Video Output	HD-AHD/HD-TVI/HD-CVI/CVBS
Power Supply	DC12V ±10%
Current Consumption	95mA(MAX)
Dimension	ø125×54mm (4.92"×2.13")
Weight	300g (10.58oz)
Storage Temperature	-30~+60°C (-22~+140°F)
Operating Temperature	-30~+40°C (-22~+104°F)

**Remark: Non-regulative adaptor may cause camera damaged.
Camera is defaulted to HD-TVI.**

● Video signal output switches

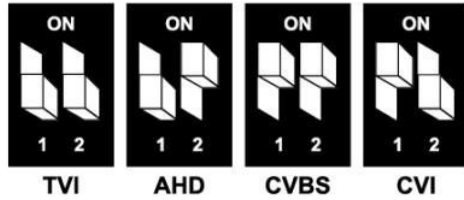

OSD Menu

MAIN MENU

MAIN MENU	
1. LENS	MANUAL
2. EXPOSURE	↵
3. BACKLIGHT	OFF
4. WHITE BAL	ATW
5. DAY&NIGHT	EXT ↵
6. NR	↵
7. SPECIAL	↵
8. ADJUST	↵
9. EXIT	SAVE&END ↵

1. LENS	MANUAL/DC#
2. EXPOSURE	#
3. BACKLIGHT	OFF/BLC#/HSBLC#
4. WHITE BAL	ATW/AWB/AWC-SET/INDOOR/OUTDOOR/ MANUAL#
5. DAY&NIGHT	AUTO#/COLOR/B/W#/EXT#
6. NR	#
7. SPECIAL	#
8. ADJUST	#
9. EXIT	SAVE&END#/RESET#/NOT SAVE#

LENS

DC LENS MODE	
1. MODE	INDOOR
2. IRIS SPEED	8
3. RETURN	RET ↵

1. MODE	INDOOR/OUTDOOR#
2. IRIS SPEED	0-15
3. RETURN	RET#

EXPOSURE

EXPOSURE	
1. SHUTTER	AUTO
2. AGC	7
3. SENS-UP	AUTO ↵
4. BRIGHTNESS	56
5. D-WDR	OFF
6. DEFOG	OFF
7. RETURN	RET ↵

1. SHUTTER	AUTO/ 1/30 / 1/60 / FLK / 1/240 / 1/480 / 1/1000 / 1/2000 / 1/5000 / 1/10000 / 1/50000 / X2 / X4 / X8 / X8 / X10 / X15 / X20 / X25 / X30
2. AGC	0-15
3. SENS-UP	AUTO#
4. BRIGHTNESS	1-100
5. D-WDR	OFF/AUTO/ON#
6. DEFOG	OFF/AUTO#
7. RETURN	RET#

DEFOG

DEFOG	
1. POS/SIZE	↵
2. GRADATION	0
3. DEFAULT	↵
4. RETURN	RET ↵

1. POS/SIZE	POSITION/SIZE/RET AGAIN
2. GRADATION	0-2
3. DEFAULT	#
4. RETURN	RET#

BACKLIGHT

BLC	
1. LEVEL	MIDDLE
2. AREA	↵
3. DEFAULT	↵
4. RETURN	RET ↵

1. LEVEL	MIDDLE/LOW/HIGH
2. AREA	POSITION/SIZE/RET AGAIN
3. DEFAULT	#
4. RETURN	RET#

DAY&NIGHT

B/W	
1. BURST	OFF
2. IR SMART	OFF
3. RETURN	RET ↵

1. BURST	OFF/ON
2. IR SMART	OFF/ON#
3. RETURN	RET#

D&N AUTO

1. D--N(AGC)	18
2. D--N(DELAY)	58
3. N--D(AGC)	6
4. N--D(DELAY)	46
5. RETURN	RET ↵

1. D--N(AGC)	1-255
2. D--N(DELAY)	0-60
3. N--D(AGC)	1-255
4. N--D(DELAY)	0-60
5. RETURN	RET#

NR

NR	
1. 2DNR	MIDDLE
2. 3DNR	MIDDLE
3. RETURN	RET ↵

1. 2DNR	HIGH/MIDDLE/LOW/OFF
2. 3DNR	HIGH/MIDDLE/LOW/OFF
3. RETURN	RET#

SPECIAL

SPECIAL	
1. CAM TITLE	ON ↵
2. D-EFFECT	↵
3. MOTION	OFF
4. PRIVACY	OFF
5. LANGUAGE	ENG ↵
6. DEFECT	↵
7. RS485	↵
8. RETURN	RET ↵

1. CAM TITLE	OFF/ON#
2. D-EFFECT	FREEZE/MIRROR/NEG.IMAGE/RETURN
3. MOTION	OFF/ON#
4. PRIVACY	OFF/ON#
5. LANGUAGE	ENG#/CHN1#/CHN2#/GER#/FRA#/ITA#/ SPA#/POL#/RUS#/POR#/NED#/TUR#
6. DEFECT	#
7. RS485	#
8. RETURN	RET#

D-EFFECT

1. FREEZE	ON
2. MIRROR	OFF
3. NEG. IMAGE	OFF
4. RETURN	RET ↵

1. FREEZE	OFF/ON
2. MIRROR	OFF/MIRROR/V-FLIP/ROTATE
3. NEG. IMAGE	OFF/ON
4. RETURN	RET#

DEFECT

1. LIVE DPC	ON ↵
2. WHITE DPC	ON ↵
3. BLACK DPC	ON ↵
4. RETURN	RET ↵

1. LIVE DPC	OFF/ON
2. WHITE DPC	OFF/MIRROR/V-FLIP/ROTATE
3. BLACK DPC	OFF/ON
4. RETURN	RET#

ADJUST

ADJUST	
1. SHARPNESS	AUTO ↵
2. MONITOR	LCD ↵
3. LSC	ON
4. VIDEO OUT	PAL
5. RETURN	RET ↵

1. SHARPNESS	OFF/AUTO#
2. MONITOR	LCD#/CRT#
3. LSC	OFF/ON
4. VIDEO OUT	NISC/PAL
5. RETURN	RET#

EXIT

EXIT	
1. EXIT	RESET ↵

1. EXIT	SAVE&END#/RESET#/NOT SAVE#
---------	----------------------------