

Specs

Style	Standard (LxW)	Thickness	Weight/Box	Qty/Box	SF/Box	
Texture Tile	11.5 in. x 11.5 in.	0.94 in.	13 lbs	16	14.69	

All specs refer to singular products and not multiples unless specified. Due to the nature of the material, cutting and fabrication process, minor dimensional variances may occur. Custom options available upon request.

Kirei	Red List
24mm	Peclare.
100% PET (60% post-consumer recycled)	Deciare:
ASTM E84 Class A	hpdc
Available upon request	Jane County
4-6 weeks (1-50 boxes) 6-8 weeks (50-100 boxes) For larger quantities, lead times determined per order	WELL
CDPH (CA 01350) Compliant TVOC: <0.5 mg/m3 Ecospecifier GreenTag Compliant TVOC: 0.015 mg/m2/hr (ASTM D5116)	LEED AMERICAN AMERICA
	24mm 100% PET (60% post-consumer recycled) ASTM E84 Class A Available upon request 4-6 weeks (1-50 boxes) 6-8 weeks (50-100 boxes) For larger quantities, lead times determined per order CDPH (CA 01350) Compliant TVOC: <0.5 mg/m3 Ecospecifier GreenTag Compliant

^{*}Actual lead times are determined when the project goes into production and can change based on production schedule and all quantities, color and thicknesses being in stock at time of order. See Kirei's Product Lead Time Disclosure for more information.




Acoustic Data


Sound Absorption

Frequency	250Hz	500Hz	800Hz	1000Hz	2000Hz	4000Hz	NRC
m²/Object	1.03	3.27	5.16	5.70	6.64	7.09	0.70


Acoustic data is measured in Sabins per Texture Tile.

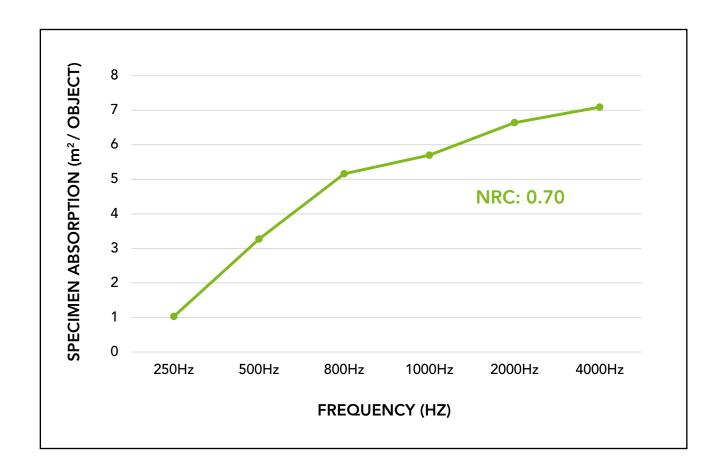

Product Dimensions

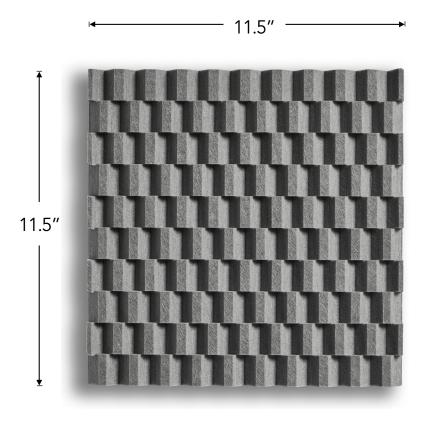

Texture Tile

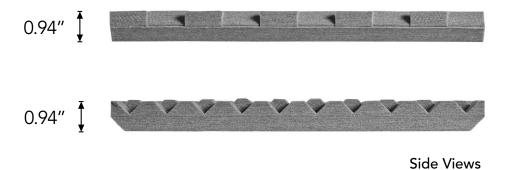


Available Colors




Color variation between dye lots is a natural characteristic of recycled PET felt due to the manufacturing process. Slight differences between samples and finished product may occur.

Installation

When mounting, use standard construction adhesives (e.g. Liquid Nails/Titebond - NOT PVA glue). Clean and prepare surface per adhesive guidelines. Spread adhesive evenly on the back of the tile, leaving room at the edges for glue to spread. After applying adhesive, mount tiles per layout and maintain even pressure per adhesive manufacturer instructions. Clean any excess adhesive. When a continuous pattern is desired from tile to tile, ensure tiles are abutted in the same direction as only one side will allow perfect peak pattern alignment. For more information, see the Texture Tiles Installation Guide.

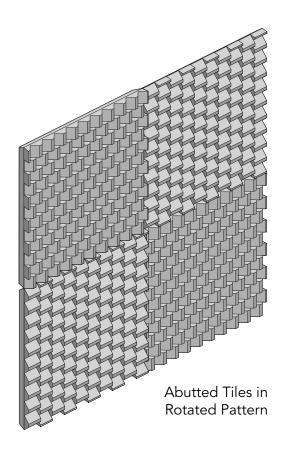

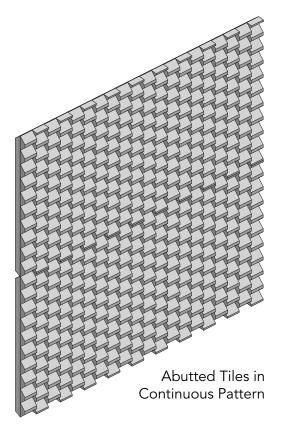



Product shown: Texture Tiles in Colors 101 (Frost) & 274 (Orchid)



Product shown: Texture Tiles in Color 402 (Pebble)



Product shown: Texture Tiles in Color 444 (Smoke)



Product shown: Texture Tiles in Color 444 (Smoke)



Product shown: Dash & Texture Tiles in Colors 274 (Orchid) & 402 (Pebble)

kirei

Learn more and request your free sample: 619.236.9924 | sales@kireiusa.com kireiusa.com