

# WDL-2100

FLEXIBLE SPIKE TOOTH HARROWS



## 16-BAR REAR FOLD



Learn more at [www.mcfarlaneag.com](http://www.mcfarlaneag.com)

**FLEXIBLE SPIKE TOOTH HARROWS**


# WDL-2100

## **TWICE THE COVERAGE, TWICE THE PERFORMANCE THE TOTAL TILLAGE TOOL**

McFarlane's 16-Bar Spike Tooth Rear Fold Harrow is more than a harrow. It's a total tillage tool. It's a tool that provides superior performance for field finishing, field preparation and chemical incorporation.

**The 16-Bar Rear Fold** gives you double coverage, and double performance. With 2-to-3 times the normal number of bars and spikes, McFarlane's 16-Bar Rear Fold thoroughly breaks and stirs the soil, significantly reducing field preparation time. Depending on soil conditions, some operators use the McFarlane 16-Bar Rear Fold alone for spring field preparation.

The 16-Bar Rear Fold Harrow is the ideal tool for shallow chemical incorporation. It provides superior coverage taking chemicals to the 1"-to-2" depth recommended by many manufacturers. The result is better incorporation and better performance from your herbicides.

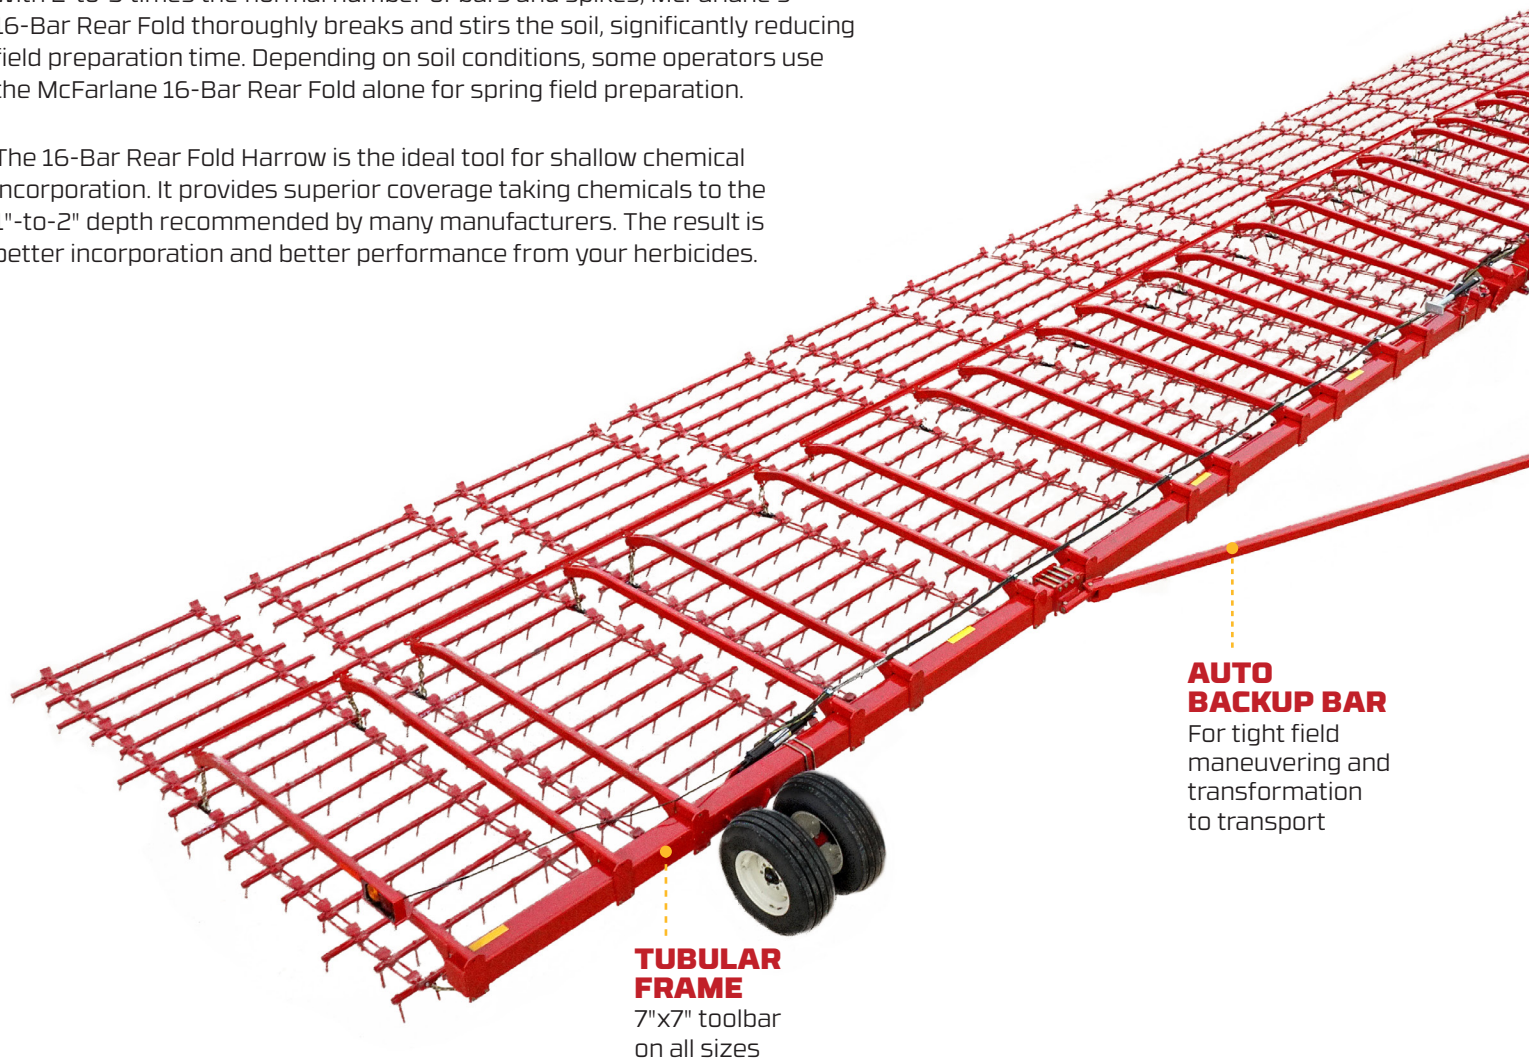

**AUTO  
BACKUP BAR**  
For tight field  
maneuvering and  
transformation  
to transport

**TUBULAR  
FRAME**  
7"x7" toolbar  
on all sizes

**The 16-Bar Rear Fold Harrow,** built for durability and ease of operation, combines McFarlane's long standing tradition of rugged dependability with features designed to provide maximum coverage and performance.



#### **DUAL WING WHEEL**


Greater flotation in field and improved stability in transport

## **FEATURES**

- Long hitch for easy turning
- Heavy-duty 1 piece frame fabricated out of rectangular tubular steel
- Excellent for leveling ridges from fall tillage
- Ideal for managing small grain straw
- Good for broadcast seeding
- Complete with 16-Bar harrow sections
- 16 Harrow bars for superior leveling
- Fully flexible for handling heavy residue
- 20 Teeth per foot for excellent coverage
- High-carbon replaceable diamond-shaped teeth

#### **TEETH ANGLES**

Two positive pitch teeth settings: 70° or reverse harrow pull at 49°

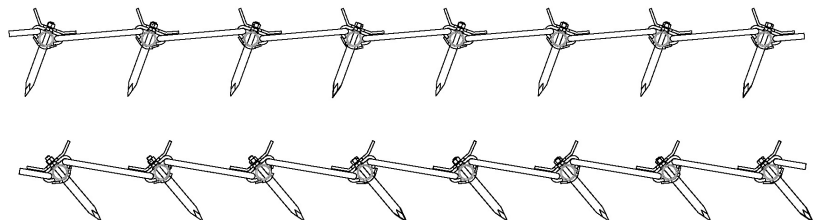

**Shown with Optional Dual Axles and 14L Main Frame Tires**

Standard walking axle and 11L tires



## SPECIFICATIONS

| MODEL       | Cutting Width | Transport Width | Transport Length | Transport Height | Approximate Weight |
|-------------|---------------|-----------------|------------------|------------------|--------------------|
| WDL-2160-16 | 60'-4"        | 13'-10"         | 45'-8"           | 11'-4"           | 10,683 lbs.        |
| WDL-2170-16 | 69'-7"        | 13'-10"         | 50'-8"           | 11'-4"           | 12,547 lbs.        |
| WDL-2180-16 | 80'-0"        | 13'-10"         | 55'-8"           | 11'-4"           | 14,354 lbs.        |
| WDL-2190-16 | 90'-0"        | 13'-10"         | 60'-8"           | 11'-4"           | 16,400 lbs.        |

### HP REQUIREMENTS

8-bar: 2-3 HP/ft

16-bar: 4-6 HP/ft

