

MFG/model number

AR/SRMW22G26-EZ-SX

The ROP Shop SKU

100285

MFG/model number

Himore/308653052 FH

PWV25/2.3

The ROP Shop SKU

101298

MFG/model number

Himore/308653052

PWV(R)27/2.3

The ROP Shop SKU

100948

MFG/model number

Himore/PWV 24/2.4HB

The ROP Shop SKU

101632

MFG/model number

Himore/

PWV(R)24/2.4HB

The ROP Shop SKU

101631

/model number

MFG/model number

Himore/308653035

PWV(R)28/2.5C

The ROP Shop SKU

100947

MFG/model number

AR/RMW25G28-EZ-SX

The ROP Shop SKU

100276

MFG/model number

AR/RMW25G28D-F7-EZ

The ROP Shop SKU

100274

G/model number

e ROP Shop SKU

G/model number

AR/RG2125HN

100269

MFG/model number

ne ROP Shop SKU

AR/RG1528HN

100268

Shaft

7/8"

GPM

2.2

Shaft

7/8"

GPM

2.3

Shaft

7/8"

GPM

2.3

Shaft

7/8"

GPM

2.4

Shaft

7/8"

GPM

2.4

Shaft

7/8"

GPM

2.5

Shaft

7/8"

GPM

2.5

Shaft

7/8"

GPM

2.5

Shaft

7/8"

GPM

2.5

Shaft

24mm

inverted

GPM

4

Shaft

24mm

inverted

GPM

5.5

Shaft

1"

GPM

3

Shaft

1"

GPM

3

Shaft

1"

GPM

4

Shaft

1"

GPM

4

Shaft

1"

GPM

4

1" SHAFT

Bolt pattern

5 3/16", 4 1/2"

4000/2600

Bolt pattern

5 3/16", 4 1/2"

Max PSI/Min PSI

3700/2600

Bolt pattern

4 bolts (5 1/4", 3 1/4",

5 3/16", 4 1/2"

Max PSI/Min PSI 4000/2600

Bolt pattern

3 bolts (7 11/16", 6

3/16", 6 7/16") Max PSI/Min PSI

2600/2400

Bolt pattern

3 bolts (7 11/16", 6

3/16", 6 7/16")

Max PSI/Min PSI

2800/2600

Bolt pattern

3 bolts (7 11/16", 6

3/16", 6 7/16") Max PSI/Min PSI

2800/2600

Bolt pattern 3 bolts (7 11/16", 6

3/16", 6 7/16")

Max PSI/Min PSI

2400/2200

Bolt pattern

3 bolts (7 11/16", 6

Bolt pattern

3 bolts (7 11/16", 6

3/16", 6 7/16") Max PSI/Min PSI

2800/2600

3/16", 6 7/16")

Max PSI/Min PSI

3100/2900

Bolt pattern

3 bolts (7 11/16", 6

3/16", 6 7/16")

Max PSI/Min PSI

2800/2600

Bolt pattern

4 bolts (2 5/8"

square)

Max PSI/Min PSI

2800/2600

Bolt pattern

4 bolts (2 3/8"

square)

Max PSI/Min PSI

4000/2600

https://theropshop.com/shop/products/pwv

 $\underline{https://theropshop.com/shop/products/brass-head-2800-psi-vertical-pump-2-5-gpm-w-7-8-shaft-1}$

24MM SHAFT

Website link

Website link

front-outlet

rear-outlet

pshop.com/shop/products/pwv-25-2-3-himore-vertical-pump-2800-psi-w-aluminum-head-fh-flipped-head

Website link

Website link

Website link

Website link

Vertical

5 minimum

Vertical

Max HP needed

5.5 minimum

Max HP needed


4.5 minimum

Orientation

Vertical

| https://thero |
|---------------|
| |
| |
| |
| |
| |



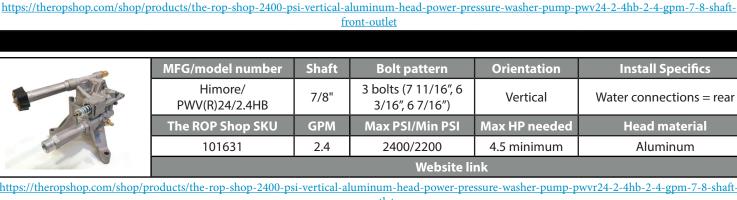







| nttps://tner |
|--------------|
| |
| |
| |
| https://thei |
| |
| |
| |
| |

| https:// |
|----------|
| |
| |
| |

| p. | п |
|---------------|-----|
| https:/ | /tl |
| | |
| | 1 |
| | |
| | |
| | L |
| | ı |
| | Γ |
| TATA | Ì |
| | ttı |
| <u>11</u> | щ |
| | |
| | I |
| | ľ |
| | |
| | h |
| | L |
| 1414 66 | L |
| 0000 | |
| httms://thous | |
| https://thero | ps |

| | Th |
|-----------------|-------|
| https://therops | shop. |
| | |
| | MF |
| | |

| https://ther | or |
|--------------|----|
| | |
| | |
| | |

| 3823 | |
|----------|----|
| https:// | th |
| | |
| | |
| | |
| | |
| | |
| | L |
| TARL | |

| https://therop | sh |
|----------------|----|
| | |
| MIN OOOO | |

| | MFG/model number | Shaft | Bolt pattern | Orientation | Install Specifics | |
|---------------------------------|--|-------|--|---------------------|----------------------------------|--|
| | Himore/308418003 QC APW25/2.3L | 7/8" | 4 bolts (2 5/8" square) | Horizontal | Oil vent cap must point up | |
| | The ROP Shop SKU | GPM | Max PSI/Min PSI | Max HP needed | Head material | |
| | 800077 | 2.5 | 2600/2400 | 5 minimum | Aluminum | |
| | Website link | | | | | |
| https://theropshop.com/shop/pro | oducts/2600-psi-pressure-was | | 2-3-gpm-7-8-shaft-w-valve -hardware-kit-1 | -qc-keyway-hardware | 2-100946-101055-trs-keyway-3-16- | |
| | | | | | | |
| | MFG/model number | Shaft | Bolt pattern | Orientation | Install Specifics | |
| | Himore/308418003 Threaded APW25/2.3L | 7/8" | 4 bolts (2 5/8" square) | Horizontal | Oil vent cap must point up | |
| | The ROP Shop SKU | GPM | Max PSI/Min PSI | Max HP needed | Head material | |
| | 800096 | 2.5 | 2600/2400 | 5 minimum | Aluminum | |
| | Website link | | | | | |
| https://theropshop.com/ | https://theropshop.com/shop/products/2600-psi-pw-24-2-3l-pressure-washer-pump-hz-7-8-short-shaft-w-keyway-100946-trs-keyway-3-16 | | | | | |
| | | | | | | |
| | MFG/model number | Shaft | Bolt pattern | Orientation | Install Specifics | |
| | Himore/308653035 FH PWV28/2.5C | 7/8" | 3 bolts (7 11/16", 6 3/16", 6 7/16") | Vertical | Water connections = front | |
| | The ROP Shop SKU | GPM | Max PSI/Min PSI | Max HP needed | Head material | |

| | MFG/model number | Shaft | Bolt pattern | Orientation | Instal | |
|-------------------------|---|----------------|---|----------------------------------|------------------------|--|
| | Himore/308418003 Threaded APW25/2.3L | 7/8" | 4 bolts (2 5/8" square) | Horizontal | Oil vent cap | |
| | The ROP Shop SKU | GPM | Max PSI/Min PSI | Max HP needed | Head | |
| | 800096 | 2.5 | 2600/2400 | 5 minimum | Alu | |
| | Website link | | | | | |
| https://theropshop.com/ | shop/products/2600-psi-pw-2 | 4-2-31-press | sure-washer-pump-hz-7-8 | -short-shaft-w-keyway | <u>y-100946-trs-ke</u> | |
| | | | | | | |
| | MFG/model number | Shaft | Bolt pattern | Orientation | Instal | |
| | | | | | | |
| | Himore/308653035 FH PWV28/2.5C | 7/8" | 3 bolts (7 11/16", 6 3/16", 6 7/16") | Vertical | Water conr | |
| | i i | 7/8" GPM | , , | Vertical Max HP needed | | |
| | PWV28/2.5C | | 3/16", 6 7/16") | | | |
| | PWV28/2.5C The ROP Shop SKU | GPM | 3/16", 6 7/16") Max PSI/Min PSI | Max HP needed 6 minimum | Water conr Head | |
| https://there | PWV28/2.5C The ROP Shop SKU | GPM 2.5 | 3/16", 6 7/16") Max PSI/Min PSI 3100/2900 Website li | Max HP needed 6 minimum nk | Head | |
| https://there | PWV28/2.5C The ROP Shop SKU 101297 | GPM 2.5 | 3/16", 6 7/16") Max PSI/Min PSI 3100/2900 Website li | Max HP needed 6 minimum nk | Head | |

| | MFG/model numbe | |
|-------------------------------------|----------------------------------|--|
| | Himore/308653035 F PWV28/2.5C | |
| | The ROP Shop SKU | |
| | 101297 | |
| | | |
| https://theropshop.com/shop/product | | |
| | | |
| | MFG/model numbe | |
| | AR/RMW25G28-EZ | |
| | The ROP Shop SKU | |
| | 100275 | |

| https://thero |
|---------------|
| |
| |
| |
| 1 Program 1 |

| 0000 | |
|---------------|---|
| https://thero | ľ |
| | |
| 1111 0000 | |
| https://t | t |

4141

| AR/XMV3G30D-VR54- 200PKG | |
|-----------------------------|----|
| The ROP Shop SKU | |
| 100292 | Ī |
| | |
| neropshop.com/shop/product | ts |
| | |
| MFG/model number | |
| AR/RSV4G40HDF40-EZ | |
| The ROP Shop SKU | |
| 100282 | |
| | |
| os://theropshop.com/shop/pr | 0 |
| | |
| MFG/model number | |
| AR/RKV4G37-VRT-PKG | |

The ROP Shop SKU

100270

MFG/model number

AR/RRV4G40D-F24

The ROP Shop SKU

100280

MFG/model number

AR/RRV4G40D-VRT-PKG

The ROP Shop SKU

100281

Website link <u>com/shop/products/4000-psi-horizontal-pressure-washer-pump-3-96-gpm-24x40-mm-solid-shaft</u> **Bolt pattern** 4 bolts (2 3/8" square) Max HP needed Max PSI/Min PSI 5 for low PSI, 18 3600/2600 Website link oshop.com/shop/products/3600-psi-horizontal-pressure-washer-pump-5-5-gpm-24x40-mm-solid-shaft

for max PSI **Bolt pattern** 4 bolts (5 1/4", 3 1/4", 5 3/16", 4 1/2" Max PSI/Min PSI 3000/2800 **Website link**

Max HP needed 6 minimum s/3000-psi-horizontal-pump-3-gpm-w-vr54-200-plumbed-unloader Orientation 4 bolts (5 1/4", 3 1/4", Horizontal Oil vent cap must point up Max PSI/Min PSI Max HP needed 5 minimum **Website link** oducts/brass-head-4000-psi-horizontal-pump-4-gpm-w-1-shaft

Orientation 4 bolts (5 1/4", 3 1/4", Horizontal Oil vent cap must point up Max HP needed 5 minimum **Website link** hop.com/shop/products/brass-head-3700-psi-horizontal-pump-4-gpm-w-1-shaft-assembly-w-unloader

Install Specifics Orientation Horizontal Oil vent cap must point up Max HP needed 5 minimum Orientation Horizontal

| needed | Head mat | | | |
|---------------------------|----------|--|--|--|
| imum | Brass | | | |
| | | | | |
| shaft-assembly-w-unloader | | | | |
| | | | | |
| | | | | |
| | | | | |

| ıssem | bly-w | <u>-unlo</u> | <u>ader</u> | | |
|-------|-------|--------------|-------------|--|--|
| | | | | | |
| | | | | | |
| | | | | | |

Install Specifics Orientation Water connections = rear Max HP needed **Head material** Aluminum https://theropshop.com/shop/products/2600-psi-vertical-pump-2-2-gpm-w-7-8-shaft-1 Orientation **Install Specifics** Water connections = front

Head material

Aluminum

Install Specifics Orientation Water connections = rear Vertical Max HP needed **Head material** 5.5 minimum Aluminum https://theropshop.com/shop/products/pwv-1?keywords=100948 Orientation **Install Specifics** Water connections = front Vertical

Head material

Aluminum

Install Specifics

Brass

Install Specifics

Water connections = front

Head material

Brass

Water connections = rear

Head material

Brass

Install Specifics

Water connections = rear

Head material

Brass

Install Specifics

Water connections = versatile

Head material

Install Specifics

Oil vent cap must point up

Head material

Brass

Install Specifics

Oil vent cap must point up

Head material

Brass

Brass

Install Specifics

Head material

Brass

Head material

Brass

Brass

- Water connections = rear 3/16", 6 7/16") Max HP needed **Head material** Max PSI/Min PSI 2400/2200 4.5 minimum Aluminum Website link https://theropshop.com/shop/products/the-rop-shop-2400-psi-vertical-aluminum-head-power-pressure-washer-pump-pwvr24-2-4hb-2-4-gpm-7-8-shaft-Orientation **Install Specifics Bolt pattern** 4 bolts (2 5/8"
 - Max PSI/Min PSI Max HP needed **Head material** 2600/2400 5 minimum Aluminum **Website link** lucts/2600-psi-pw-24-2-3l-pressure-washer-pump-hz-7-8-short-shaft-w-keyway-100946-trs-keyway-3-16 Shaft **Bolt pattern** Orientation **Install Specifics** 3 bolts (7 11/16", 6 Water connections = front Vertical

Orientation

Vertical

Max HP needed

5.5 minimum

Vertical

Max HP needed

6 minimum

Orientation

Vertical

Max HP needed

5.5 minimum

Orientation

Vertical

Max HP needed

Orientation

Horizontal

Max HP needed

5 for low PSI, 18

for max PSI

Orientation

Horizontal

- Website link https://theropshop.com/shop/products/brass-head-2800-psi-vertical-pump-2-5-gpm-w-7-8-shaft **Install Specifics** Orientation **Bolt pattern** 3 bolts (7 11/16", 6
- 5.5 minimum **Brass** Website link https://theropshop.com/shop/products/2600-psi-vertical-pump-2-5-gpm-w-7-8-shaft-4-bolt-flange
 - Orientation **Install Specifics** Horizontal Oil vent cap must point up **Head material**
 - **Install Specifics**
 - **Head material Website link** heropshop.com/shop/products/brass-head-4000-psi-horizontal-pump-4-gpm-w-1-shaft-pump-only

| al-pump-4-gpm-w-1-shaft-assembly-w-unloader | | | | |
|---|--|--|--|--|
| | | | | |
| | | | | |
| | | | | |