


# Zehnder Arteplano Premium Electric

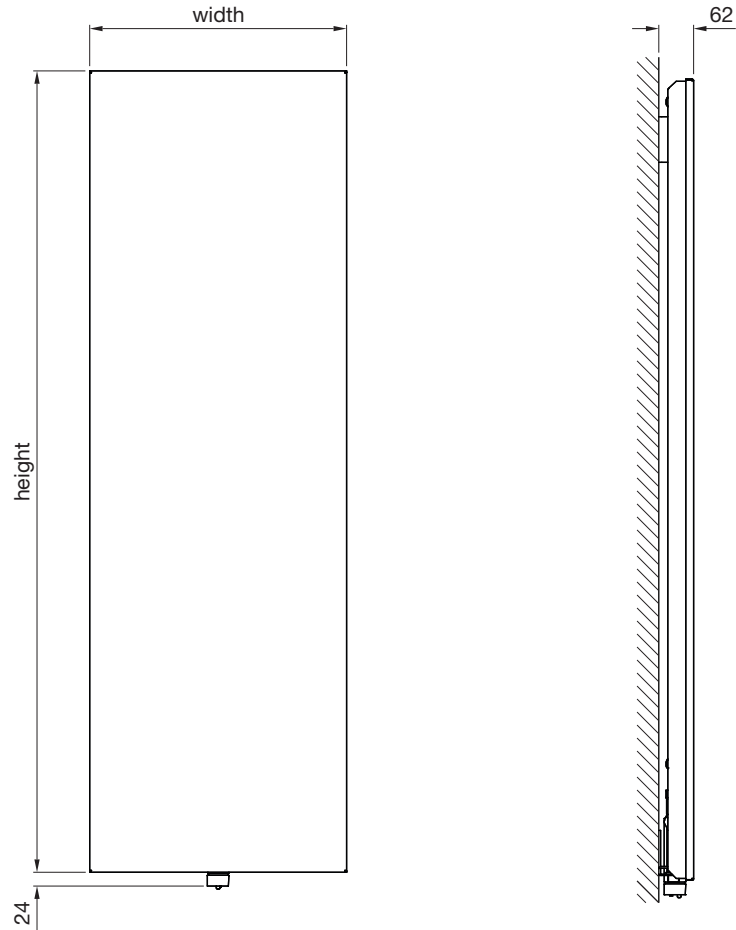

All dimensions shown are in millimetres

All steel construction: **32mm x 37mm steel headers**  
**8mm x 70mm steel ribs**  
**1.2mm thick panel - aluminium, copper, brass or stainless steel**

Connections: **1.2m long flying lead (2 core)**

Model	Height ± 2mm	Width ± 2mm	Finish	Output Watts	Weight kg
VZAP-140-4/UG	1413	305	all	300	19.0
VZAP-140-6/UG	1413	453	all	600	28.0
VZAP-140-8/UG	1413	601	all	600	36.0
VZAP-160-4/UG	1613	305	all	300	22.0
VZAP-160-6/UG	1613	453	all	600	32.0
VZAP-160-8/UG	1613	601	all	600	41.0
VZAP-180-4/UG	1813	305	all	300	25.0
VZAP-180-6/UG	1813	453	all	600	36.0
VZAP-180-8UG	1813	601	all	900	46.0

Issue 1.0



Zehnder Group UK Ltd

Concept House  
 Watchmoor Point  
 Camberley  
 Surrey GU15 3AD

Tel: 01276 605800  
 Fax: 01276 24058  
 retailsales@zehnder.co.uk  
 www.zehnder.co.uk

Registered in England: 2296696

# Zehnder Arteplano Premium Electric

## Tools & Material Required

Tape measure  
Spanner  
Screwdriver - crosshead & flathead  
Electric drill  
Masonry drill bit  
Spirit level  
Stepladder (for taller radiators)

Key	Component	Qty
A	Wall Plug	8
B	Upper Bracket	2
C	Lower Bracket	1
D	Screw, 6mm dia x 50mm	8
E	Washer	8
F	Countersunk Screw	2
G	Boss	2
H	Allen Key	1

## Assembly Instructions

Accurately mark out bracket holes on wall using spirit level.

Drill eight holes to a minimum depth of 65mm & insert wall plugs (A).

Attach brackets (B & C) to wall with screws (E) & washers (F).

Hang radiator onto wall by inserting wire hooks at the top of the radiator into brackets (B).


Swing radiator away from wall and wire radiator to cable outlet.

Swing radiator back to wards wall until tabs on the lower back of the radiator engage in lower bracket (E).

Secure radiator in place by tightening countersunk screws (H) and bosses (I) into lower bracket (E) using Allen key (I).

Electric radiators should be fitted only by a qualified electrician and must be earthed and connected to a cable outlet in the bathroom in accordance with I.E.E. wiring regulations. The electrical connection should be made to a '5 amp fused fixed spur' located outside the bathroom.

*Note: for maintenance purposes, cable outlets must remain accessible and cables must not be buried directly into walls.*

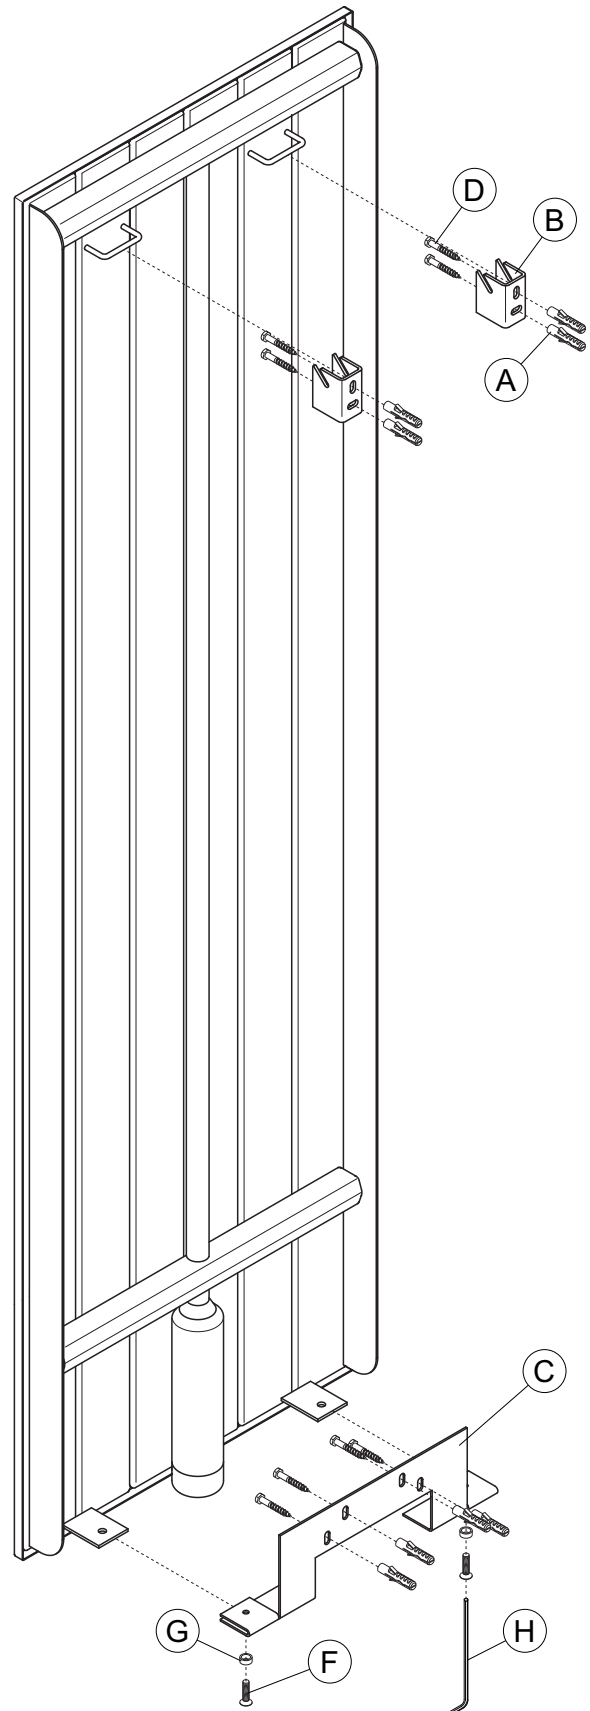

Issue 1.0



Zehnder Group UK Ltd

Concept House  
Watchmoor Point  
Camberley  
Surrey GU15 3AD

Tel: 01276 605800  
Fax: 01276 24058  
retailsales@zehnder.co.uk  
www.zehnder.co.uk

Registered in England: 2296696