


Zehnder Ax Spa Electric

always the
best climate

zehnder

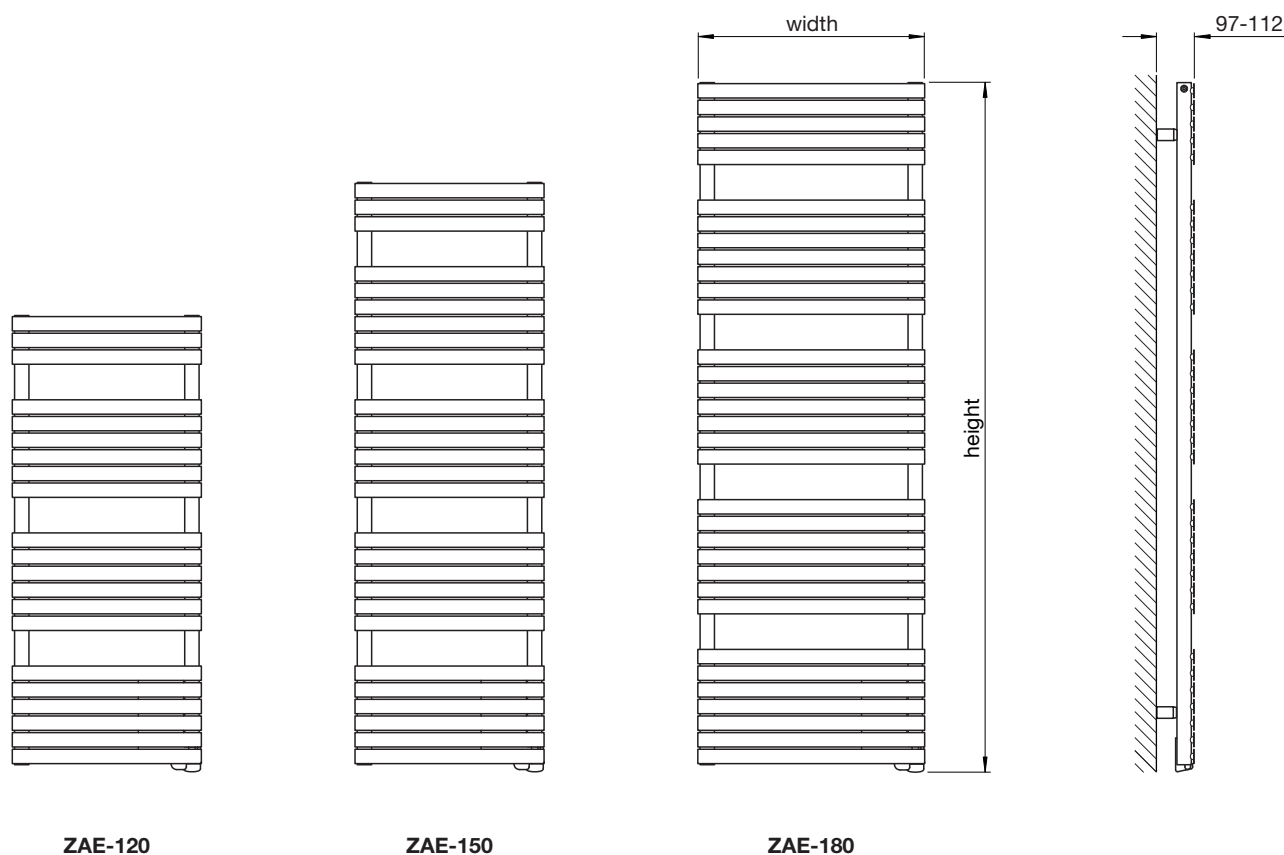

All dimensions shown are in millimetres

All steel construction: **38mm x 10.5mm horizontal tubes
dia 38mm headers**

Connections: **1.2m long flying lead (2 core)**

Model	Height ± 2mm	Width ± 2mm	Finish	Output Watts	Weight kg
ZAE-120-050/GF	1210	500	painted	500	16.2
ZAE-150-040/GF	1562	400	painted	500	17.9
ZAE-150-050/GF	1562	500	painted	750	20.3
ZAE-180-060/GF	1826	600	painted	1000	27.0
ZAE-180-080/GF	1826	800	painted	1250	32.9

Issue 1.0



Zehnder Group UK Ltd

Concept House
Watchmoor Point
Camberley
Surrey GU15 3AD

Tel: 01276 605800
Fax: 01276 24058
retailsales@zehnder.co.uk
www.zehnder.co.uk

Registered in England: 2296696

Zehnder Ax Spa Electric

always the
best climate

zehnder

Tools & Material Required

Tape measure
Electric drill
Masonry drill bit - 8mm diameter
Spirit level
Stepladder (for taller radiators)

Key	Component	Qty
A	Wall Plug	4
B	Bracket	4
C	Screw - 6mm dia x 50mm	4
D	Washer	4
E	Grub Screw	4
F	Allen Key	1

Assembly Instructions

Accurately mark out bracket holes on wall using spirit level.


Drill four holes & insert wall plugs (A).

Attach brackets (B) to wall with screws (C) & washers (D).

Slide post on radiator into bracket (B) and secure in position by tightening grub screw (E) with allen key (F).

Electric radiators should be fitted only by a qualified electrician and must be earthed and connected to a cable outlet in the bathroom in accordance with I.E.E. wiring regulations. The electrical connection should be made to a '5 amp fused fixed spur' located outside the bathroom.

Note: for maintenance purposes, cable outlets must remain accessible and cables must not be buried directly into walls.

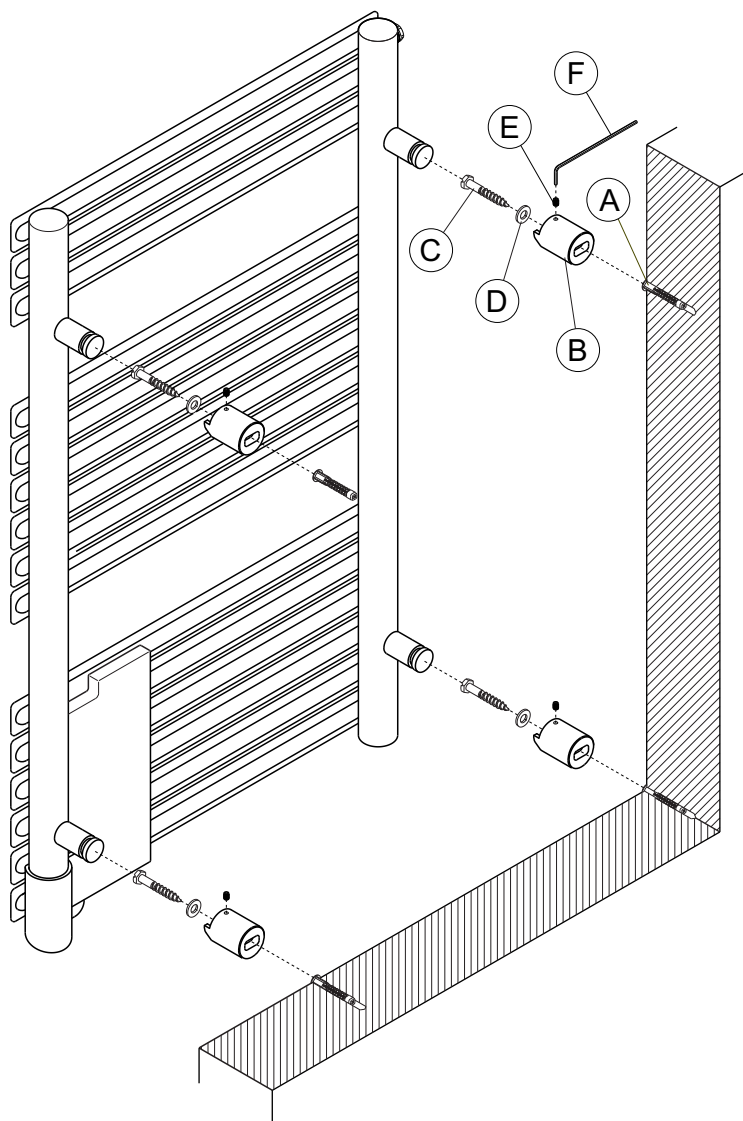

Issue 1.0



Zehnder Group UK Ltd

Concept House
Watchmoor Point
Camberley
Surrey GU15 3AD

Tel: 01276 605800
Fax: 01276 24058
retailsales@zehnder.co.uk
www.zehnder.co.uk

Registered in England: 2296696