


# Zehnder Splash

always the best climate **zehnder**

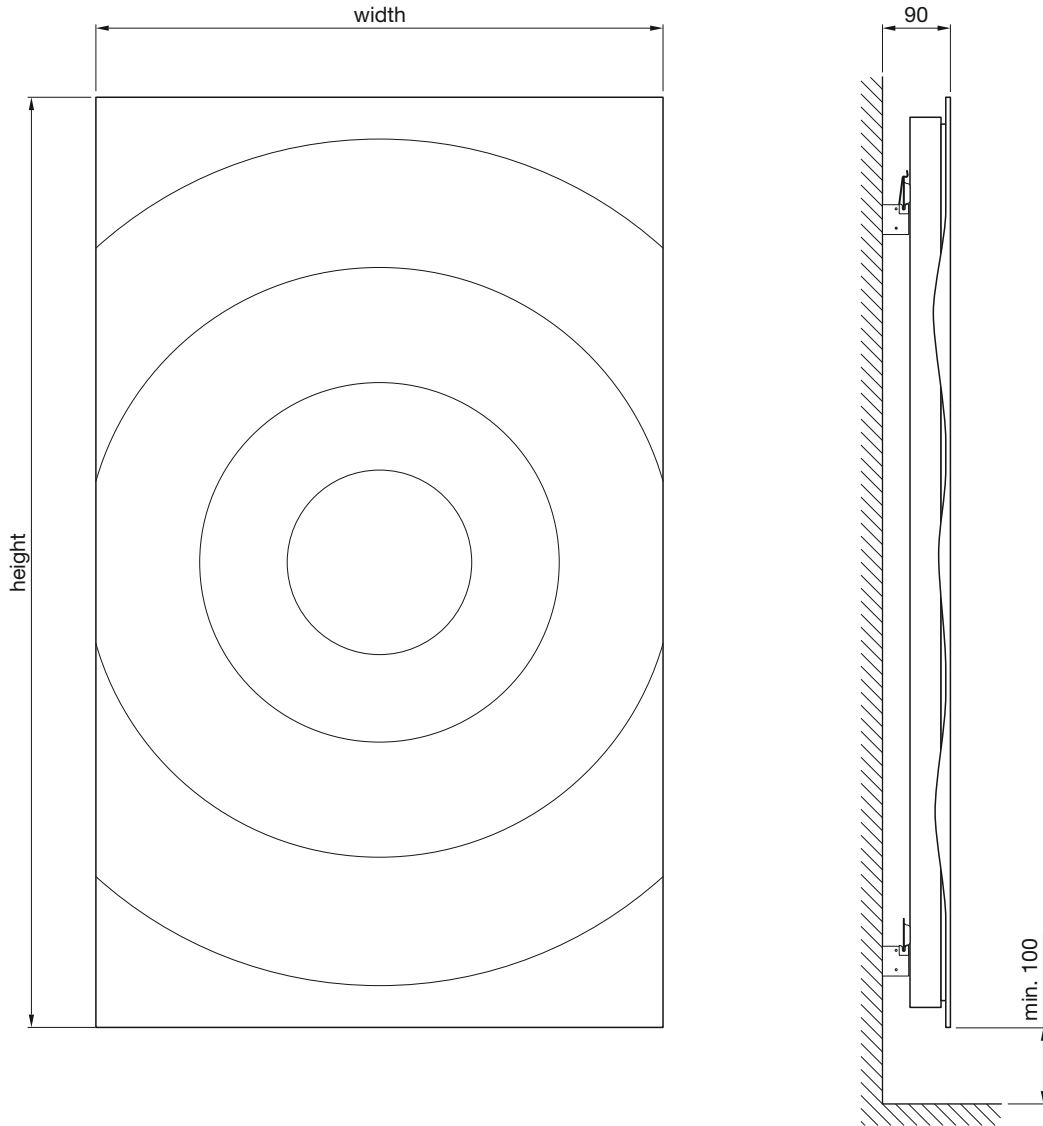

All dimensions shown are in millimetres

Construction: **Dupont Corian®**  
 Connections: **1.2m long flying lead (2 core)**

Model	Height ± 2mm	Width ± 2mm	Finish	Output Watts	Weight kg
SPZE-120-075/GF	1230	750	white	750	30

Issue 1.0



Zehnder Group UK Ltd

Concept House  
 Watchmoor Point  
 Camberley  
 Surrey GU15 3AD

Tel: 01276 605800  
 Fax: 01276 24058  
 retailsales@zehnder.co.uk  
 www.zehnder.co.uk

Registered in England: 2296696

## Tools & Material Required

Wall plugs - to suit screws  
Screws - Hex head, 7mm diameter x 55mm length  
Masonry drill bit -to suit wall plugs  
Screwdriver  
Electric drill  
Spirit level  
Stepladder (for taller radiators)

Key	Component	Qty
A	Wall Plug*	4
B	Bracket	4
C	Screw*	4
D	Spring Retaining Clip	2

\* Wall Plugs & Screws not supplied

## Assembly Instructions

Accurately mark out four bracket holes on wall using spirit level.

Drill four holes & insert wall plugs (A).


Attach brackets (B) to wall with screws (C).

Hang radiator onto brackets (C).

Engage spring retaining clips (D) on two upper brackets (C).

Electric radiators should be fitted only by a qualified electrician and must be earthed and connected to a cable outlet in the bathroom in accordance with I.E.E. wiring regulations. The electrical connection should be made to a '5 amp fused fixed spur' located outside the bathroom.

*Note: for maintenance purposes, cable outlets must remain accessible and cables must not be buried directly into walls.*

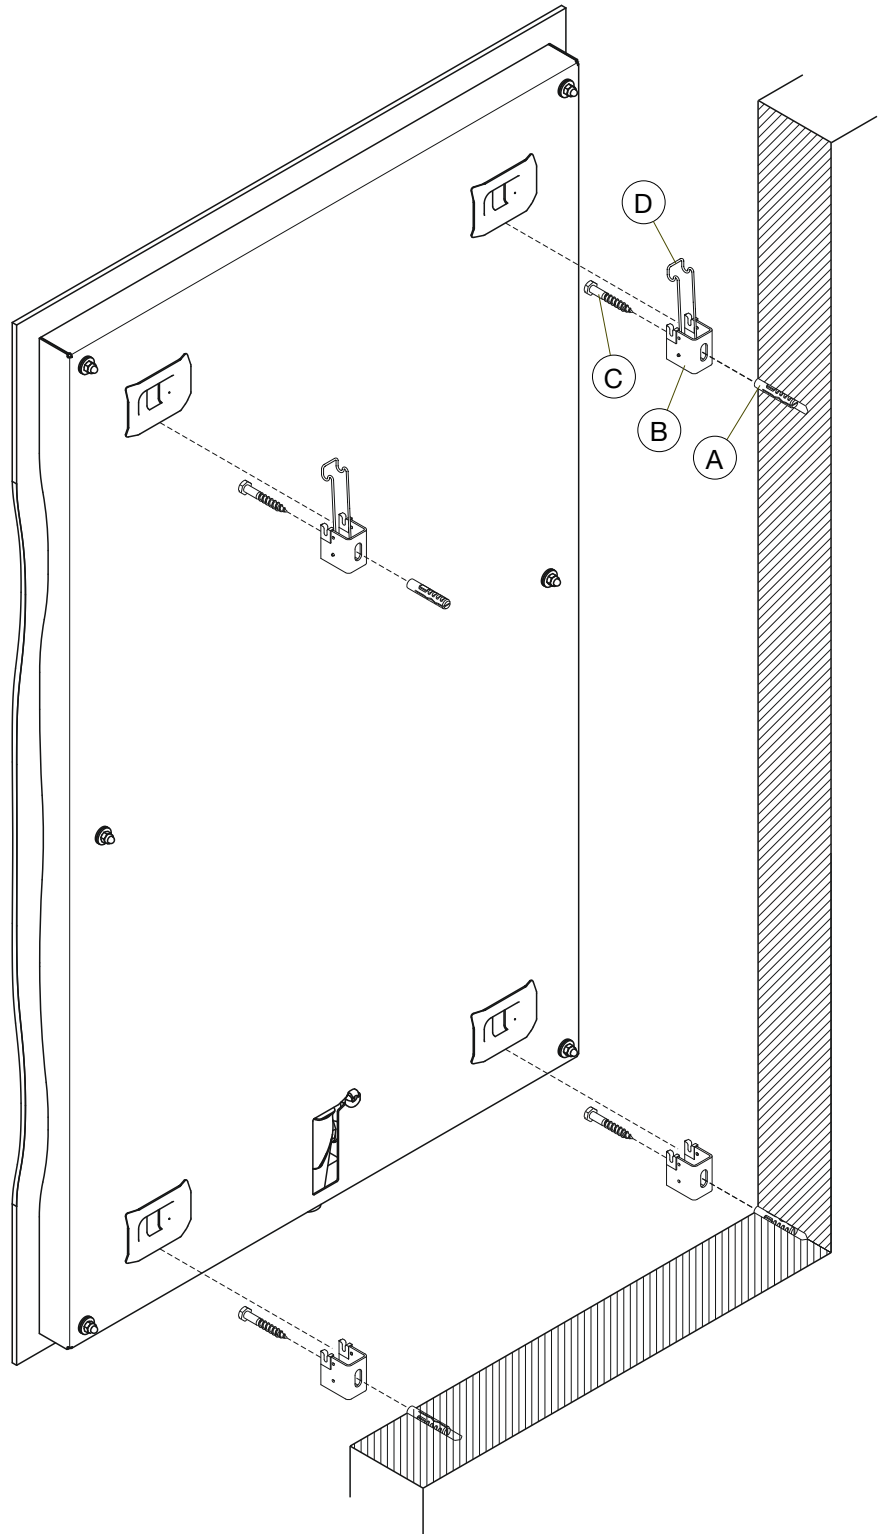

Issue 1.0