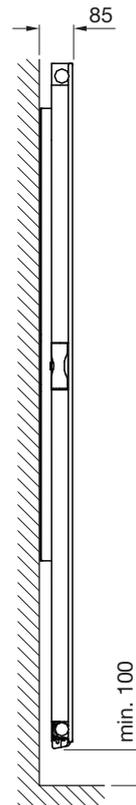
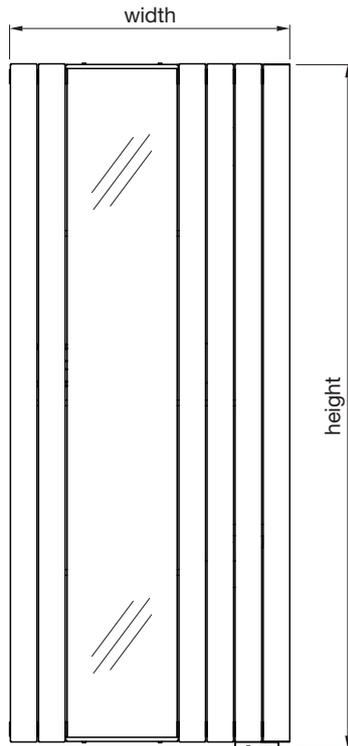


Zehnder Roda Mirror Electric

All dimensions shown are in millimetres

All steel construction: **70mm x 11mm ribs
dia 38mm headers**

Connections: **1.2m long flying lead (2 core)**

Model	Height ± 2mm	Width ± 2mm	Number of Tubes	Output Watts	Weight kg
ROEM180-075/GF	1817	740	6	1000	44.0

Issue 1.0



Zehnder Group UK Ltd

Concept House
Watchmoor Point
Camberley
Surrey GU15 3AD

Tel: 01276 605800
Fax: 01276 24058
retailsales@zehnder.co.uk
www.zehnder.co.uk

Registered in England: 2296696

Tools & Material Required

Tape measure
 Electric drill
 Masonry drill bit
 Screwdriver
 Allen key
 Spirit level
 Stepladder (for taller radiators)

Key	Component	Qty
A	Wall Plug*	9
B	Wall Bracket	2
C	Securing Bracket	1
D	Screw - 6mm dia x 50mm*	9
E	Grub Screw	1

* Wall Plugs & Screws not supplied

Assembly Instructions

Accurately mark out bracket holes on wall using spirit level.

Drill nine holes & insert wall plugs (A).

Attach wall brackets (B) & securing bracket (C) to wall with screws (D).

Hang radiator onto hinge pins on the wall brackets. Rotate radiator towards wall until locking pin on radiator locates in securing bracket (C).

Secure in position by tightening grub screw (E) with allen key.

Electric radiators should be fitted only by a qualified electrician and must be earthed and connected to a cable outlet in the bathroom in accordance with I.E.E. wiring regulations. The electrical connection should be made to a '5 amp fused fixed spur' located outside the bathroom.

Note: for maintenance purposes, cable outlets must remain accessible and cables must not be buried directly into walls.

