


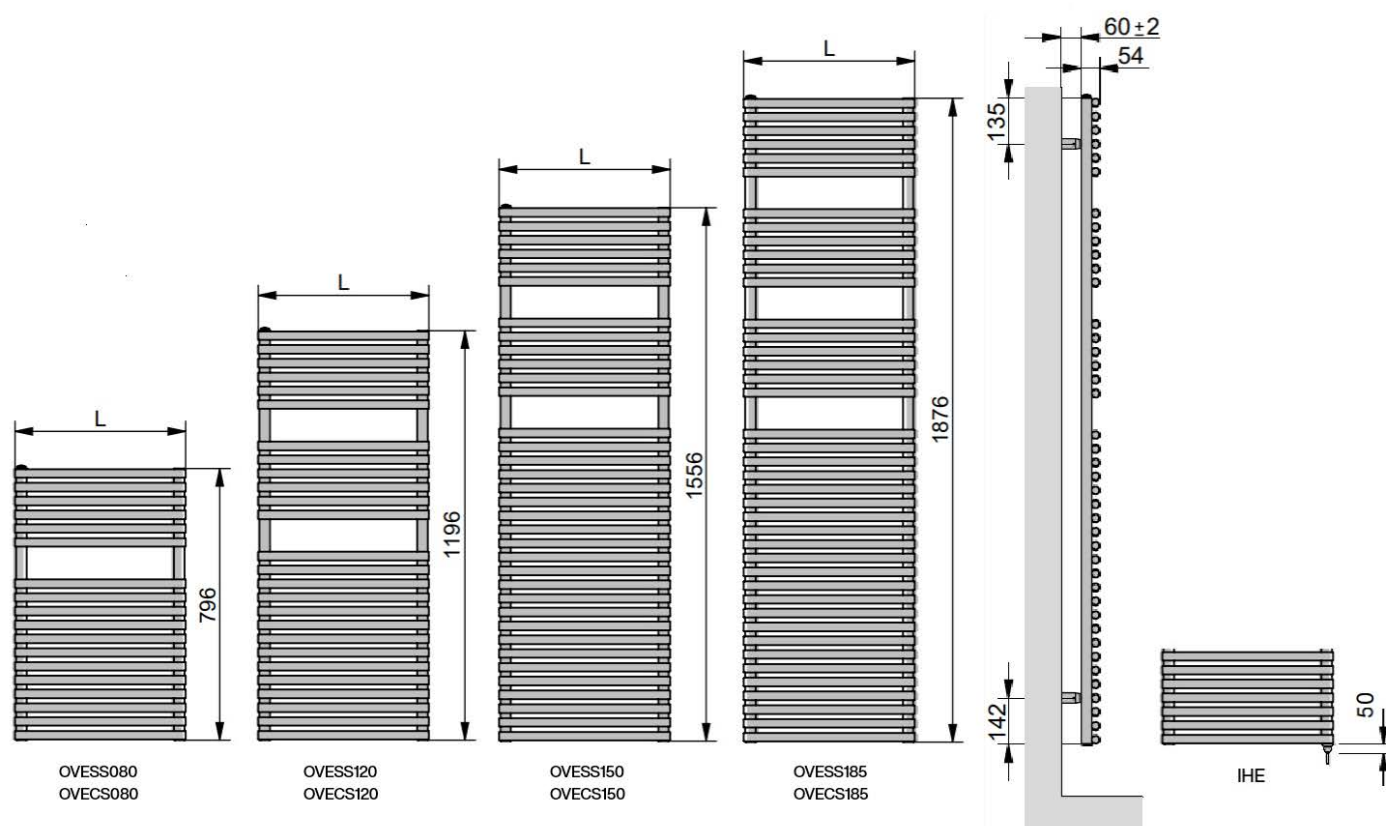

All dimensions shown are in millimetres

All steel construction: dia 25mm x 1.2mm horizontal tubes
dia 30mm x 1.5mm vertical tubes

Connections: 1.2m long flying lead (3 core)

Immersion heater rating: IP65

* does not include immersion heater

Model	Height* ± 2mm	Width ± 2mm	Finish	Output Watts	Weight kg
OVSSS080050EAK	796	496	painted	400	12.7
OVSSS080060EAK	796	596	painted	400	14.7
OVSSS120050EAK	1196	496	painted	600	18.4
OVSSS120060EAK	1196	496	painted	600	21.3
OVSSS150050EAK	1556	496	painted	900	24.6
OVSSS120060EAK	1556	596	painted	900	28.5
OVSSS185050EAK	1876	496	painted	1200	29.0
OVSSS185060EAK	1876	596	painted	1200	33.5
OVSCS080050EAK	796	496	chrome	200	12.7
OVSCS080060EAK	796	596	chrome	200	14.7
OVSCS120050EAK	1196	496	chrome	400	18.4
OVSCS120060EAK	1196	596	chrome	400	21.3
OVSCS150050EAK	1556	496	chrome	400	24.6
OVSCS150060EAK	1556	596	chrome	600	28.5
OVSCS185050EAK	1876	496	chrome	600	29.0
OVSCS185060EAK	1876	596	chrome	600	33.5

Issue 1.1



Zehnder Group UK Ltd

Concept House
Watchmoor Point
Camberley
Surrey GU15 3AD

Tel: 01276 605800
Fax: 01276 24058
retailsales@zehnder.co.uk
www.zehnder.co.uk

Registered in England: 2296696

Tools & Material Required

Tape measure
Electric drill
Masonry drill bit - 8mm diameter
Spirit level
Stepladder (for taller radiators)

Key	Component	Qty
A	Bracket Post	4
B	Spacer	4
C	Wall Plug	4
D	Bracket	4
E	Screw - 6mm dia x 50mm	4
F	Washer	4
G	Grub Screw	4
H	Allen Key	1

Assembly Instructions

Screw bracket posts (A) & spacers (B) onto studs on the rear of the radiator.

Accurately mark out bracket holes on wall using spirit level.

Drill four 8mm diameter holes to a minimum depth of 65mm & insert wall plugs (C).

Screw brackets (D) into wall plugs (C) with screws (E) & washers (F).

Slide bracket post (A) on radiator into bracket (D) and secure in position by tightening grub screw (G) with allen key (H).

Electric radiators should be fitted only by a qualified electrician and must be earthed and connected to a cable outlet in the bathroom in accordance with I.E.E. wiring regulations. The electrical connection should be made to a '5 amp fused fixed spur' located outside the bathroom.

Note: for maintenance purposes, cable outlets must remain accessible and cables must not be buried directly into walls.

