

# Xtreme HV 1.0

## Modular HV Battery System

**High Efficiency and Scalability:** The high voltage system offers a nominal voltage of 204.8~614.4V, reducing transmission losses, and its modular design provides 2 to 6 module stacking solutions, ensuring high operational reliability with dynamic current equalizing techniques.

**Advanced Smart Management:** Wireless design with Wi-Fi connectivity, and the intelligent energy management system (EMS) allow for easy activation, unified management, and real-time monitoring and fault pre-warning.



**Superior Safety and Durability:** With a built-in battery optimizer, up to 8000 cycle life, IP55 protection rating, and comprehensive certifications, the system ensures long-term stable operation and global safety compliance.

**User-Friendly Integrated Solutions:** The integration with Renon Flex Inverter eliminates the need for additional third-party inverters, and the 10-year warranty enhances user confidence and satisfaction.



System Layout

### Product Details

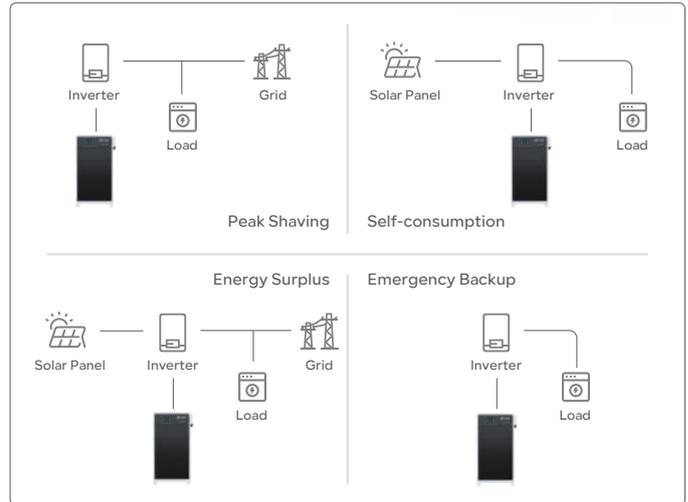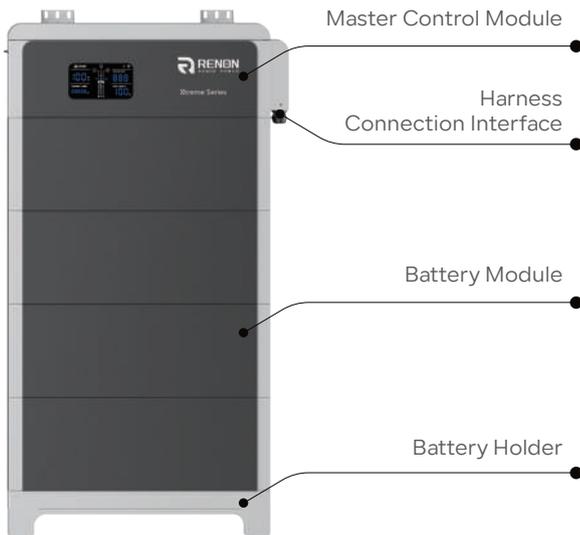

### Application Scenario




Battery Energy Storage	2 Modules	3 Modules	4 Modules	5 Modules	6 Modules
Battery Combination				1P32S	
Cell Capacity (Ah)				50	
Nominal Energy (kWh)	10.24	15.36	20.48	25.6	30.72
Nominal Power (kW)	9.83	14.75	19.66	24.58	29.5
Nominal Voltage (V)	204.8	307.2	409.6	512	614.4
Max. Operating Current (A)				48	
Max. Current (A)@2S				60	
Operating Voltage Range (V)	172.8~233.6	259.2~350.4	345.6 ~ 467.2	432 ~ 584	518 ~ 700.8
Dimensions (W*D*H)	775*270*854mm 30.5*10.6*33.6in	775*270*1112mm 30.5*10.6*43.8in	775*270*1370mm 30.5*10.6*53.9in	775*270*1628mm 30.5*10.6*64.1in	775*270*1886mm 30.5*10.6*74.3in
Total Weight	152kg 335lb	212kg 467lb	272kg 600lb	332kg 731lb	392kg 862lb


General Parameters	
Scalability	Max. 3 cluster in parallel
Storage Conditions	-20°C ~ 55°C(0°C ~ 35°C Recommended) Up to 90%RH, non-condensing Initial SoC: 50%
Operating Temperature	Charge: 0°C ~ 50°C Discharge: -20°C ~ 50°C
Cooling	Natural Cooling
Max. Altitude	2000m / 6561ft
Cycle Life	8000 Cycles
Communication	RS485, CAN, WiFi

System Characteristic	
Battery Compliances	IEC62619, MSDS, UN38.3 CEI 0-21, EN62477
Installation Method	Natural Cooling
Installation Scene	Indoor or Outdoor
IP Rating	IP55
Warranty [1]	10 Years

[1] Please refer to the warranty letter for details

## ■ Packaging & Shipping Details

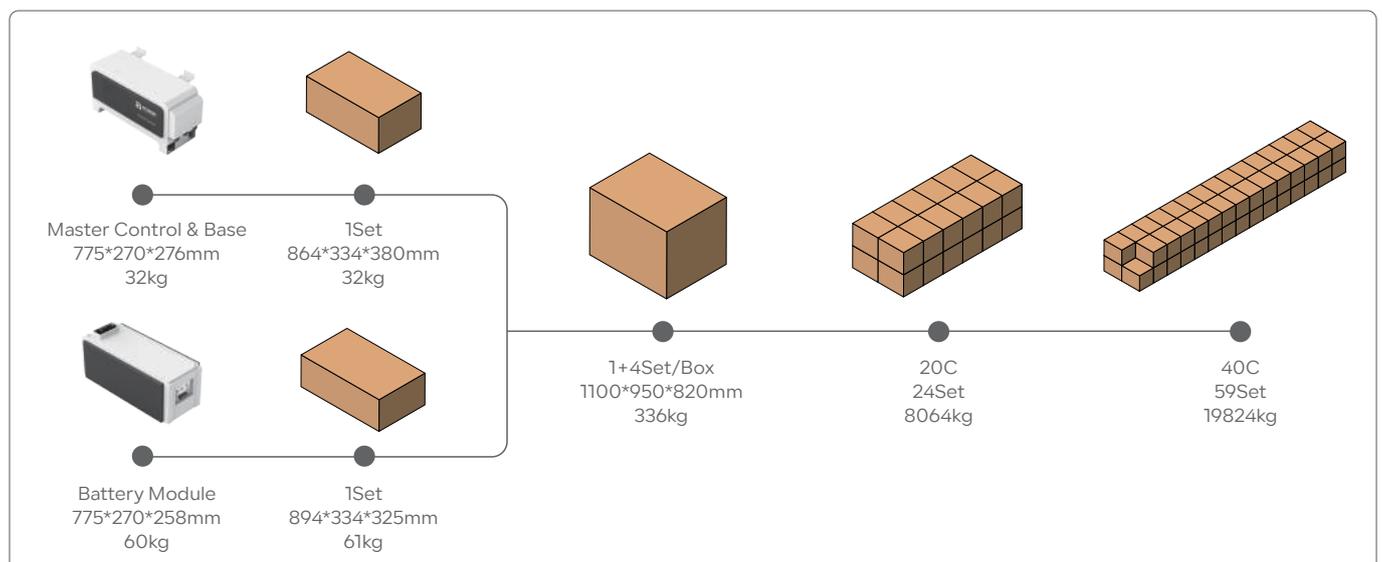

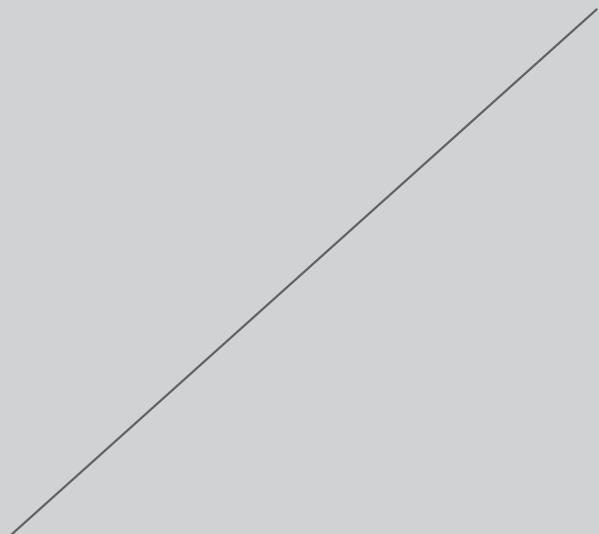

---

## Renon Power Technology Inc.

5900 Balcones Drive Suite 100, Austin, TX 78731 USA

---

## Renon Power Solutions Sp.z o.o.

ul. ELBLĄSKA 1, 93-459, ŁÓDŹ, POLAND

---

## Renon Power Technology B.V.

Rietbaan 10, 2908 LP Capelle aan den IJssel

---

## Renon Power 株式会社

東京都中央区日本橋箱崎町20-5 VORT箱崎5F

---

## 瑞智新能源(惠州)有限公司

广东省惠州市惠阳区三和街道下桥背康易工业园



Whatsapp



Linkedin



Website