

(1) Cast Alloy Under Fire Stoker

(3) Optional (gas/oil) Burner

(5) Fly-Ash Collection System

(7) 3-pass Wet Back Boiler

(6) Rotary Air Lock Fuel Feeder

(8) Packaged Combustion Chamber

(9) Rotary Air Lock/Fly-Ash Dump


(2) Fuel Metering Bin

(4) Fire Door/Clean-Out

## Under Feed Stoker

**Combustion System** 



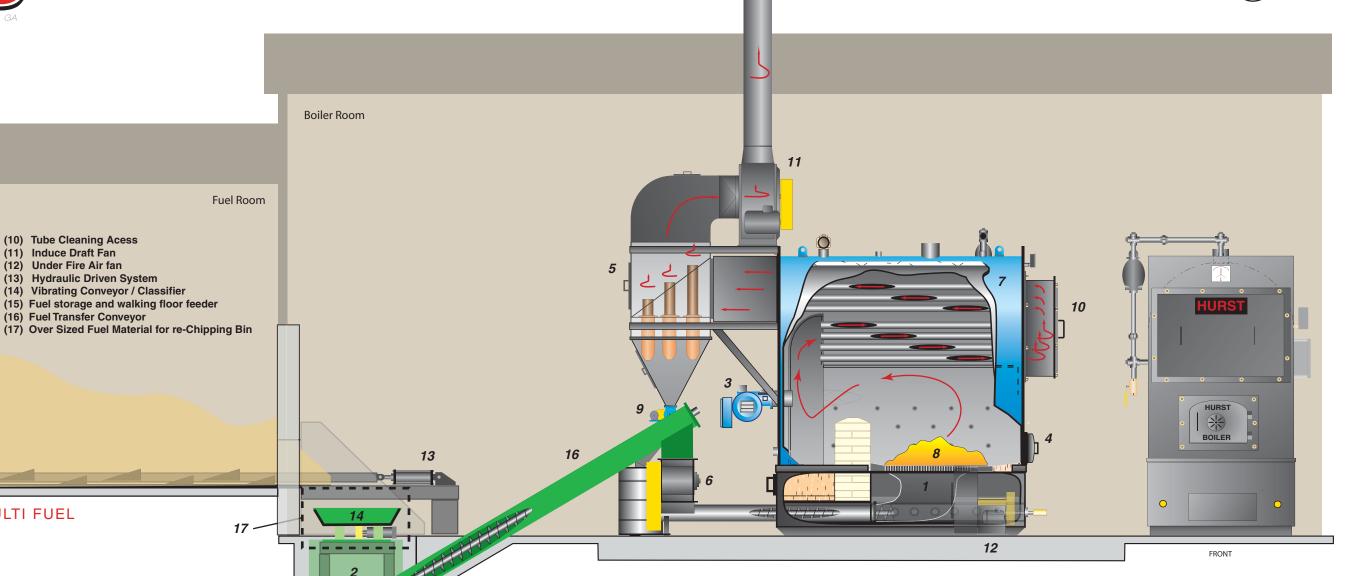

**Solid Fuel Solutions** 

**MULTI FUEL** 

15

(10) Tube Cleaning Acess

(13) Hydraulic Driven System

(16) Fuel Transfer Conveyor

(14) Vibrating Conveyor / Classifier

(11) Induce Draft Fan

(12) Under Fire Air fan

## The Solid Fuel People

HURST BOILER & WELDING CO., INC. P. O. Drawer 530

21971 Highway 319 N. Coolidge, Georgia 31738 Toll Free: 1-877-994-8778 Tel: (229) 346-3545 Fax (229) 346-3874 Email: info@hurstboiler.com The FireBox LPD UF design is suitable for applications to produce low pressure steam or hot water in ranges from 3,450 – 20,700 lbs/hr (3.4 mmBTU – 20 mmBTU) output at 15 PSI steam or 30 PSI hot water. This system is designed by HBC to combine the best technologies from the "old school" of biomass combustion and the latest advanced combustion control technologies. This combination enables these systems to provide a flexible and reliable operation utilizing a wide range of biomass waste with moisture contents ranging from 8 – 50% and requiring minimal fuel preparation. Ash removal is a manual operation. The boiler vessel is a three-pass firetube / firebox design that inherently provides an extended water membrane in the furnace area greatly reducing the amount of refractory required.

CAT# W-11

