




HURST

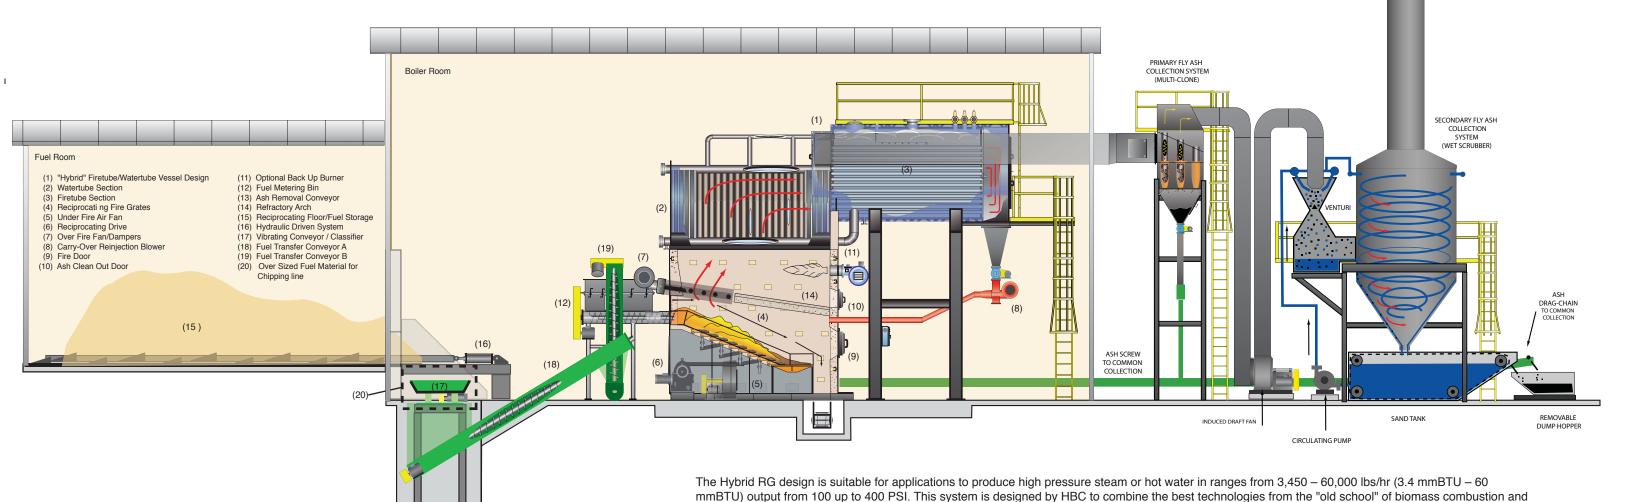

The Solid Fuel People

HURST BOILER & WELDING CO., INC. P. O. Drawer 530 21971 Highway 319 N. Coolidge, Georgia 31738 Toll Free: 1-877-994-8778 Tel: (229) 346-3545 Fax.(229) 346-3874

Email: info@hurstboiler.com

The Hurst Venturi Scrubber uses the differential between high velocity gases and free-flowing water to create droplets which entrap contaminates, hold them in suspension and deliver them as a highly concentrated slurry. The Hurst Venturi Scrubber offers more advantages in separating and recovering liquid mist and ultra-fine particulate than other gas cleaning methods.

for quicker response to sudden steam demand and much larger thermal storage that provides fast demand response times and safer operation.

the latest advanced combustion control technologies. The new HBC reciprocating grate-type stoker system permits biomass fuels with a high proportion of incombustibles to be combusted in an efficient manner with the added advantage of automatic de-ashing. This combination is particularly suitable for heating applications in lumber dry kilns, veneer log vats, veneer dryers, greenhouses, factories, schools and office buildings. This combination enables these systems to provide a flexible and reliable operation utilizing a consistent "grade" of biomass waste with moisture contents ranging from 30 – 50%. The boiler vessel is a two pass hybrid design incorporating a water tubed boiler-type water membrane and a two-pass fire tube scotch marine vessel. This vessel's advantages over standard water tube boilers include much larger steam disengagement area providing high quality steam, larger steam storage capability

