

QDD400G-AOC

400GBASE, QSFP-DD, ACTIVE OPTICAL CABLE

Features:

- QSFP-DD MSA Compliant
- Compliant with IEEE 802.3cd and CEI-56-G-VSR-PAM
- Built in Analog CDR
- Low latency for high performance computing application
- Enabled by 850nm VCSEL
- Commercial temperature: 0 to 70°C
- Hot pluggable
- Power consumption 7.2W in 400G QSFP-DD
- Transmission distance up to 70m with OM3 MM fiber or 100m with OM4 MM fiber
- Laser Eye Safety Class 1
- Management interface based on CMIS 3.0 or 4.0 (QSFP-DD)
- RoHS compliant



Applications:

- 400G Ethernet and interconnections
- Data center

1. Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Storage Temperature	Ts	-40	-	85	°C	
Relative Humidity	RH	5	-	85	%	
Power Supply Voltage	VCC	-0.3	-	3.6	V	

2. Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Case Operating Temperature	Tcase	0		70	°C	
Power Supply Voltage	VCC	3.14	3.3	3.47	V	
Data Rate	BR		53.125		Gbps	TX Rate/RX Rate per lane
Transmission Distance	TD			100	m	

QDD400G-AOC

400GBASE, QSFP-DD, ACTIVE OPTICAL CABLE

Total power consumption			7.2	7.8	W	
Coupled fiber	Multi-mode fiber				OM3/OM4 fiber	

3. Electrical Interface Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Transmitter						
Transmitter Fault Output-High	VFaultH	2	-	Vcc+0.3	V	
Transmitter Fault Output-Low	VFaultL	0	-	0.8	V	
Transmitter Disable Voltage- High	VDisH	2	-	Vcc+0.3	V	
Transmitter Disable Voltage- Low	VDisL	0	-	0.8	V	
Differential input impedance		90	100	110	Ohm	
DC common mode voltage		-350		2850	mV	
Differential eye height				900	mVdpp	
Receiver						
LOS Output Voltage-High	VLOSH	2	-	Vcc+0.3	V	
LOS Output Voltage-Low	VLOSL	0	-	0.8	V	
Differential output impedance		90	100	110	Ohm	
Differential eye height		228		900	mVdpp	
DC common mode voltage		-350		2850	mV	
AC common mode noise				17.5	mVrms	
Eye height @ 1e-5 (all PAM4 eyes)		70			mV	
Eye width @ 1e-5 (all PAM4 eyes)		0.265			UI	


4. Cable Specifications

Parameter	Value	Note
Type	OM3 MM Loose tube fiber	
Minimum bending radius (mm)	30	
Cable outer diameter (mm)	3.8 +/- 0.15 (16core)	
Cable length (m)	100 (max)	Customized length available

QDD400G-AOC

400GBASE, QSFP-DD, ACTIVE OPTICAL CABLE

5. Mechanical Diagram

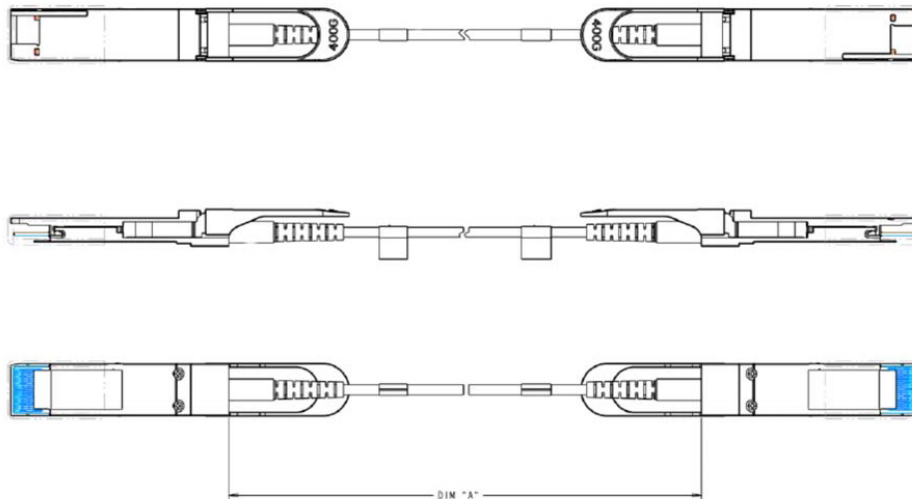

Note: External physical characteristics are subject to variation. This may include, but is not limited to, external case designs, pull tab colors and/or shapes, removal latch styles or colors, and label sizes and placement. These variations do not affect the function or characteristics of the transceivers.

6. Ordering Information

OEM	Part Numbers	OEM	Part Numbers
Arista	AOC-D-D-400G-1M-L	Juniper	QDD-400G-AOC-15M-L
Arista	AOC-D-D-400G-3M-L	Juniper	QDD-400G-AOC-25M-L
Arista	AOC-D-D-400G-5M-L	Juniper	QDD-400G-AOC-2M-L
Arista	AOC-D-D-400G-10M-L	Juniper	QDD-400G-AOC-4M-L
Arista	AOC-D-D-400G-15M-L	Juniper	QDD-400G-AOC-7M-L
Arista	AOC-D-D-400G-25M-L	Juniper	QDD-400G-AOC-12M-L
Arista	AOC-D-D-400G-2M-L	Juniper	QDD-400G-AOC-20M-L
Arista	AOC-D-D-400G-4M-L	Juniper	QDD-400G-AOC-30M-L
Arista	AOC-D-D-400G-7M-L	MSA	L-CAB-QDD-AOC-1M
Arista	AOC-D-D-400G-12M-L	MSA	L-CAB-QDD-AOC-3M
Arista	AOC-D-D-400G-20M-L	MSA	L-CAB-QDD-AOC-5M
Arista	AOC-D-D-400G-30M-L	MSA	L-CAB-QDD-AOC-10M
Cisco	QDD-400-AOC1M-L	MSA	L-CAB-QDD-AOC-15M
Cisco	QDD-400-AOC3M-L	MSA	L-CAB-QDD-AOC-25M
Cisco	QDD-400-AOC5M-L	MSA	LN-CAB-QDD-AOC-10M
Cisco	QDD-400-AOC10M-L	MSA	LN-CAB-QDD-AOC-12M

QDD400G-AOC

400GBASE, QSFP-DD, ACTIVE OPTICAL CABLE

Cisco	QDD-400-AOC15M-L	MSA	LN-CAB-QDD-AOC-15M
Cisco	QDD-400-AOC25M-L	MSA	LN-CAB-QDD-AOC-1M
Cisco	QDD-400G-AOC10M-L	MSA	LN-CAB-QDD-AOC-20M
Cisco	QDD-400G-AOC12M-L	MSA	LN-CAB-QDD-AOC-25M
Cisco	QDD-400G-AOC15M-L	MSA	LN-CAB-QDD-AOC-2M
Cisco	QDD-400G-AOC1M-L	MSA	LN-CAB-QDD-AOC-30M
Cisco	QDD-400-AOC2M-L	MSA	LN-CAB-QDD-AOC-3M
Cisco	QDD-400-AOC4M-L	MSA	LN-CAB-QDD-AOC-4M
Cisco	QDD-400-AOC7M-L	MSA	LN-CAB-QDD-AOC-5M
Cisco	QDD-400-AOC12M-L	MSA	LN-CAB-QDD-AOC-7M
Cisco	QDD-400-AOC20M-L	MSA	L-CAB-QDD-AOC-2M
Cisco	QDD-400-AOC30M-L	MSA	L-CAB-QDD-AOC-4M
Juniper	QDD-400G-AOC-1M-L	MSA	L-CAB-QDD-AOC-7M
Juniper	QDD-400G-AOC-3M-L	MSA	L-CAB-QDD-AOC-12M
Juniper	QDD-400G-AOC-5M-L	MSA	L-CAB-QDD-AOC-20M
Juniper	QDD-400G-AOC-10M-L	MSA	L-CAB-QDD-AOC-30M