
Pneumatic strike EX118P



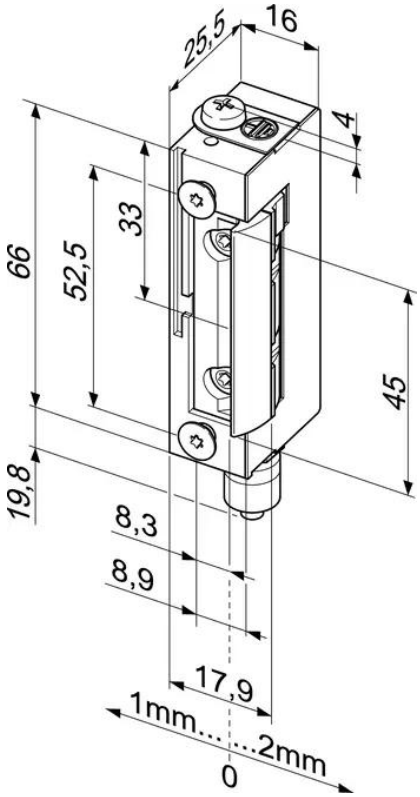

Product description

The strike works on compressed air.

The electric strike is locked when unpressurized

When compressed air is supplied, the electric strike is unlocked.

Use for EX zones 1, 2, 21, 22 with an ignition energy of more than 3mJ.

Labels:

Gas atmosphere: II 2G Ex h IIB T4 Gb X

Dust atmosphere: II 2D Ex h IIIC T80 °C Db X

Overview of Advantages

- For use in explosion-prone areas
- Radius keeper, FaFix®, adjustable by 3 mm
- Low mounting depth
- Compatible with available striking plates

Note

- The installation instructions must be observed!

Technical data

DIN-direction	universal
Adjustable keeper (FF, FaFix®)	Yes
Locked without pressure	Yes
EC certification	No. EX9 15 03 62486 011
Allowed operating pressure	3,5 bar bis 5 bar
Break-in resistance	9000 N
Height	90 mm
Width	16 mm
Depth	25.5 mm
Ambient temperature	-10 °C to +50 °C
Required hose diameter	Inside: 4 mm; outside: 6 mm
Installation position	Vertical and horizontal
Load cycles for in-plant test	500000
Certified in compliance with	EN 14846:2008

Article number	EX118P-------01
EAN	4042203660809

ASSA ABLOY Sicherheitstechnik GmbH
Bildstockstraße 20, 72458 Albstadt
Tel. + 49 7431/123-0, Albstadt@assaabloy.com
www.assaabloy.com/de