

CX-PS150UL / CX-PS300UL / CX-PS600UL Power Supplies



Camden CX-PS Series power supplies are available in a range of 1.7 Amp, 3 Amp, and 6 Amp models and are specifically designed for powering magnetic locks and electric strikes. UL and ULC listed, these models offer over current protected outputs, battery charger, up to 8 output circuits, and heavy gauge locking metal cabinets.

CX-PS Series power supplies are ideal for powering electric strikes and magnetic locks in access control, door control, and other low-voltage applications. They are not listed for powering fire alarm signal appliances.



EXCLUSIVE
PRODUCTS



BEST
QUALITY

CX-PS150UL

- Latching fire alarm tie-in with reset
- 12 or 24 VDC selectable 1.7 Amp output
- 12 or 24 VDC 200mA auxiliary output
- AC and DC power and status indicators
- Short circuit and terminal protection
- Battery charger (500mA)
- 120 VAC power input
- Metal enclosure accommodates (1) 4 Ah. battery (not included)
- UL 294 and ULC S533

CX-PS300UL / CX-PS600UL

- Latching fire alarm tie-in with reset
- 12 or 24 VDC selectable outputs
 - » CX-PS300: (4) outputs, 3 Amp max
 - » CX-PS600: (8) outputs, 6 Amp max
- AC power and status indicators
- Short circuit and terminal protection
- Battery charger (1.5 Amp)
- 120/240 VAC power input
- Low battery, battery disconnect, and battery charger trouble monitoring
- Metal enclosure accommodates (2) 12Ah. batteries (not included)
- UL 294, ULC S533, CAN/ULC 60839-11-1



SPECIFICATIONS

Voltage:

CX-PS150UL: 120 VAC

CX-PS300UL/600UL: 120/240 VAC

Output Voltage: 12/24 VDC

Output Power:

CX-PS150UL: (2) 1.7 Amps, 500mA Battery Charger

CX-PS300UL: (4) 3 Amps, 1.5 Amp Battery Charger

CX-PS600UL: (8) 6 Amps, 1.5 Amp Battery Charger

Output Protection: Short Circuit Protection

Battery Charger Monitor:

CX-PS300/600UL: Battery Load Test Every 48 Hours

Enclosure Accommodates:

CX-PS150UL: (1) 12 VDC / 4 Ah Battery

CX-PS300UL/600UL: (2) 12 VDC / 12 Ah Batteries

Dimensions:

CX-PS150UL:

9-1/8"H x 8"W x 3-1/2"D (231 x 203 x 89mm)

CX-PS300UL/600UL:

17-1/2"H x 13"W x 4-5/16"D (445 x 330 x 110mm)


ORDERING INFORMATION

MODEL


CX-PS150UL	1.7 Amp Power Supply with (2) Fused Outputs (2 Amp)
CX-PS300UL	3 Amp Power Supply with (4) Fused Outputs (2 Amp)
CX-PS600UL	6 Amp Power Supply with (8) Fused Outputs (2 Amp)

DIMENSIONS

CX-PS150UL

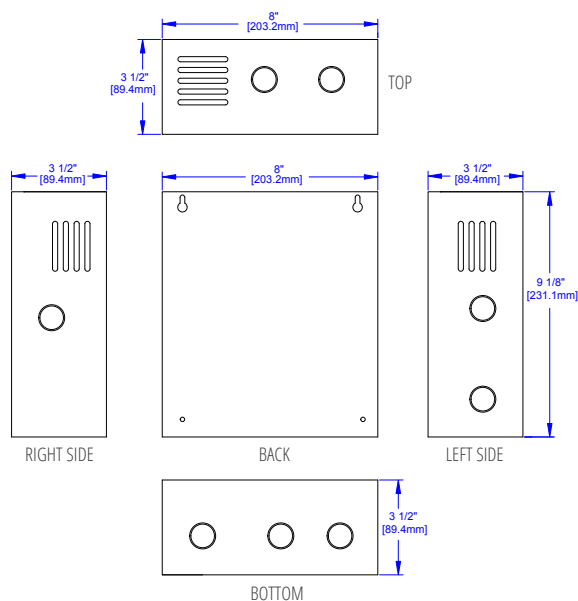

CX-PS300UL CX-PS600UL

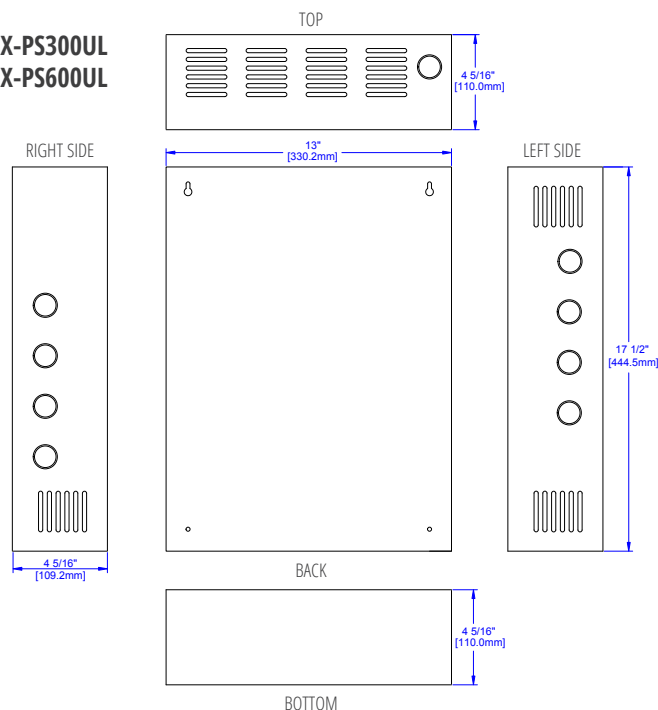

Opening New Doors to Innovation, Quality, and Support!

2395 Skymark Ave, Mississauga, ON Canada L4W 4Y6 • Toll Free: 1(877) 226-3369 (CAMDEN9)

Tel: (905) 366-3377 | Fax: (905) 366-3378 | E-mail: info@camdencontrols.com | www.camdencontrols.com



Certified ISO 9001:2015

Part #: MKTG-LIT-SP-PWRSUPPLY