

Datasheet

SETR2641AM2 SERIES - 2-Button Mini Remote

Product Description

ERONE transmitters are robust remotes with rolling code technology and are ideal for automated doors and gates, public or private access, residential or industrial environments. Compatible with any 433 MHz ERONE wireless receiver, a special algorithm ensures a continuous synchronization between the receiver and transmitter.

The SETR2641AM2 series are 2-channel remotes. These models can also be equipped with a passive tag.



SETR2641AM2.K



SETR2641AM2.B

Key Features

- Heavy-duty construction
- 820 ft range (250 m), line of sight
- Compatible with standard ERONE receivers
- Batteries included (CR2016)
- Available in black or blue



Certification



DEEE




Certification



-4°F to 131°F
(-20°C to 55°C)

Product Specifications

Material:	Plastic
Mounting:	Hand held
Technology:	Radio
Channels:	2
Frequency:	433.92 MHz
Modulation:	AM/ASK
Encoding:	Keeloq® rolling code
Read range:	820 ft (250 m)
Code combinations:	2 ⁶⁴
Weight:	0.7 oz, 20 g

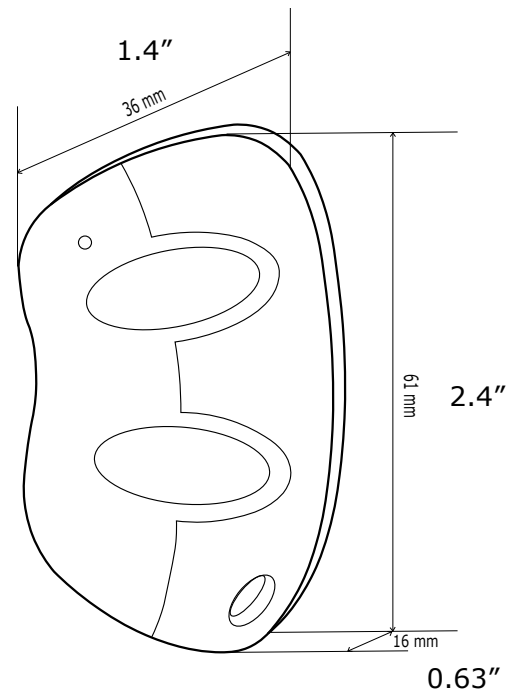

Electrical Specifications

Battery:	6V DC, 2xCR2016 lithium
Consumption:	13 mA

Also available with built-in tag



SETR2641AM2BC
Mini remote with CDVI tag



SETR2641AM2KH
Mini remote with HID tag



SETR2641AM2BP
Mini remote with PARADOX tag

All the information contained within this document (pictures, drawings, dimensions, specifications), could be perceptibly different and can be changed without prior notice. Published: 05 September 2023. CDVI_SETR2641AM2_DS_01_EN-FR_LETTER_C