


## Pace4KR

Four Port Single Pair Ethernet Media Adapter/Switch  
IEEE 802.3cg Ethernet, SPE over UTP



Altronix Pace4KR is a 4-port SPE (Single Pair Ethernet) Media Adapter/Switch that transmits data and power via twisted pair (2-wire, UTP or shielded) in a PoE(+) compliant format. In addition to new SPE (UTP) Ethernet network installations for Surveillance-cameras/Security/Industrial/BMS/HVAC/Elevator Controllers, applications include upgrading of legacy networks, i.e. LONworks, RS485, 4-20ma Control Loops, etc. by using the existing two wire cabling, thus saving rip-out & reinstallation costs.

Operationally, the Pace4KR is connected to a PoE midspan/endspan switch at the headend and passes network data and power to the remote PaceKT Series transceiver(s) over UTP up to 1km (1,000m, 3,280 ft.). Pace1KT & Pace2KT transceivers can connect to one or two remote devices, such as a camera(s) or controllers, respectively. For non-enable PoE devices, only data will be transmitted. Cable distances and multi-node device drop-offs are facilitated by using one of the two Pace2KT ports for the continued network link in a daisy chain manner.

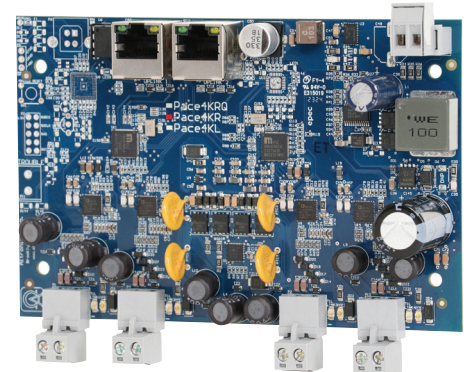

Pace4KR

For a direct T1L remote device, use Pace1K12/24S adapter to split T1L data & power for a compatible device.

**For managed switch see model Pace4KRQ.**

### Key Features

- Provides SPE (single pair Ethernet) over twisted pair (2-wire, UTP or shielded) or 16/2 AWG or higher wire up to 1km (1,000m, 3,280 ft.)
- Utilize twisted pair for new installations or retrofit of IP devices over existing twisted pair cabling
- Cost-effective solution to facilitate IP devices that need to be installed at longer distances such as in elevator shafts, tunnels, bridges, HVAC, and more...
- PoE, IEEE 802.3af (15W) and IEEE 802.3at (25W) compliant
- Auto detection allows it to safely work with non-PoE cameras/devices
- Works with Megapixel, HD720, HD1080 & VGA (SD) cameras
- Extends Network link distance in an industrial environment
- Building Automation, Elevator Systems, HVAC, Lighting, Surveillance & Security
- Up to four (4) Pace4KR can be daisy-chained for expansion
- Utilize twisted pair for new installations or retrofit of IP devices over existing twisted pair cabling
- Compatible with Pace1KT, Pace2KT, Pace1KL12S, Pace1KL24S receivers
- CE European Conformity
- Lifetime Warranty

### Maximum Length of Cable Type vs. Total Power Consumption

Wire type	Total Power Consumption	Max. Data Distance	Max. Power Distance
<b>18 AWG (2-wire, UTP)</b>	7.5W	1,000m (3,280 ft.)	1,996m (6,548 ft.)
	15W	1,000m (3,280 ft.)	998m (3,274 ft.)
	30W	1,000m (3,280 ft.)	269m (882 ft)
<b>16 AWG (2-wire, UTP)</b>	7.5W	1,000m (3,280 ft.)	3,169m (10,396 ft.)
	15W	1,000m (3,280 ft.)	1,584m (5,196 ft.)
	30W	1,000m (3,280 ft.)	427m (1,400 ft.)

#### Lifetime Warranty

## Pace4KR

Four Port Single Pair Ethernet Media Adapter/Switch  
IEEE 802.3cg Ethernet, SPE over UTP



### Specifications

#### Input

12/24V power supply

#### UTP Connection

Wire type: Twisted pair (2-wire, UTP or shielded)  
Distance: 1km (1,000m, 3,280 ft.),  
16/2 AWG or higher @ 10Mbps  
(see Maximum Length of Cable Type vs.  
Total Power Consumption chart on pg. 7)

#### Ethernet

Connectivity: RJ45, auto-crossover  
Wire type: 4-pair CAT5e or higher  
Distance: up to 100m from midspan  
Speed: 10/100BaseT, half/full duplex, auto negotiation  
PoE: IEEE 802.3af (15W) and PoE+ compliant to  
IEEE 802.3at (25W) delivered to device by  
Pace4KR  
Power provided by Pace4KR to  
Pace transceiver by PoE protocol

#### Indicators (LED)

Yellow and Green LED (by RJ45 jack):  
IP Link status, 10/100Base-T/active  
Link LED for each UTP port

#### Agency Listings

CE European Conformity

#### Physical and Environmental

Dimensions (W x L x H)  
Board: 5.5" x 3.6" x 1.125"  
(139.7mm x 91.4mm x 28.6mm)  
Shipping: 8" x 6" x 5" (203.2mm x 152.4mm x 127mm)

#### Weight (approx.)

Product: 0.4 lb. (0.18 kg)  
Shipping: 0.75 lb. (0.34 kg)

#### Temperature

Operating: -40°C to 75°C (-40° to 167°F)  
Storage: -40°C to 75°C (-40° to 167°F)


#### Relative Humidity

85% +/- 5%

#### Operating Altitude

-304.8 to 2,000m

### Typical Application Diagram

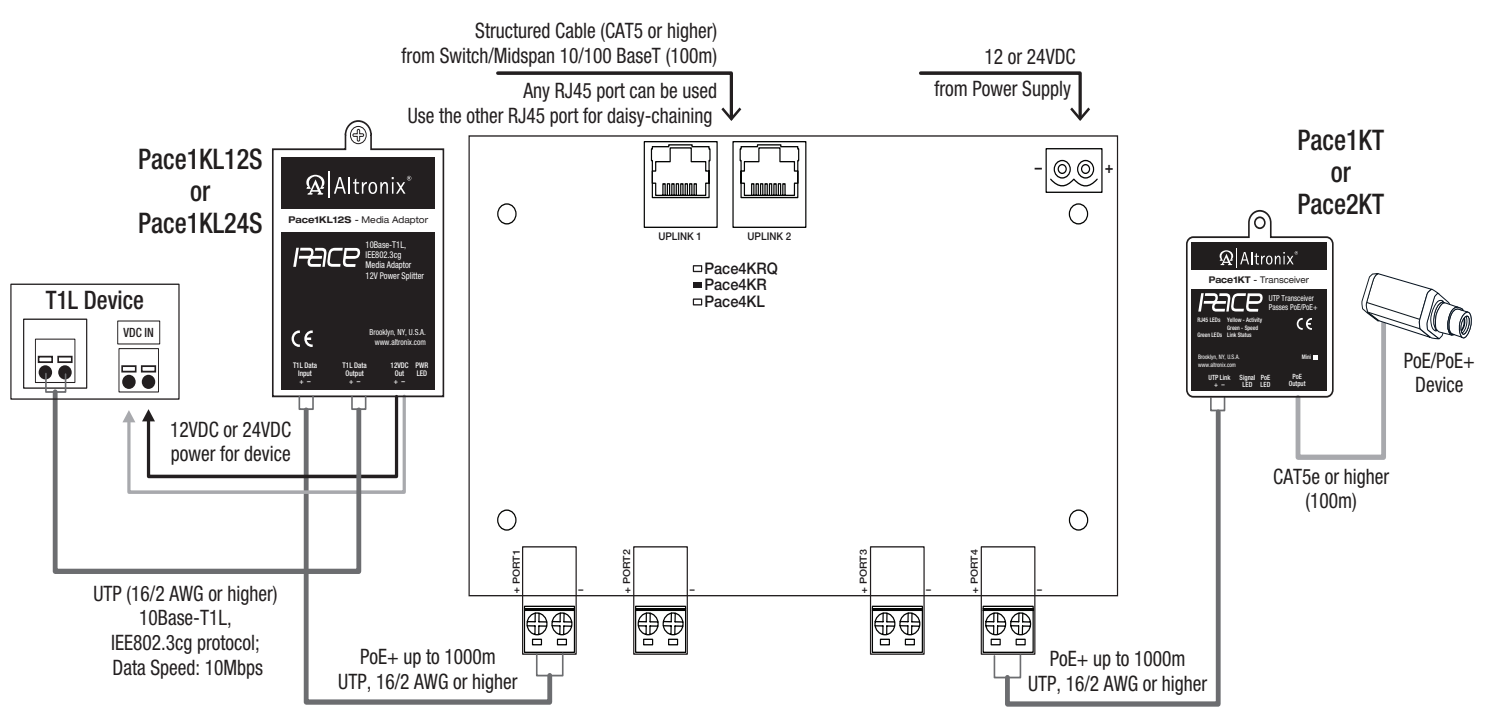

#### Lifetime Warranty

## Pace4KR

Four Port Single Pair Ethernet Media Adapter/Switch  
IEEE 802.3cg Ethernet, SPE over UTP




### Dimensions and Drawing

Board Dimensions (L x W x H approximate)

5.5" x 3.6" x 1.125" (139.7mm x 91.4mm x 28.6mm)

Mounting Holes' Tolerance: +/- 0.04 in. (1mm)

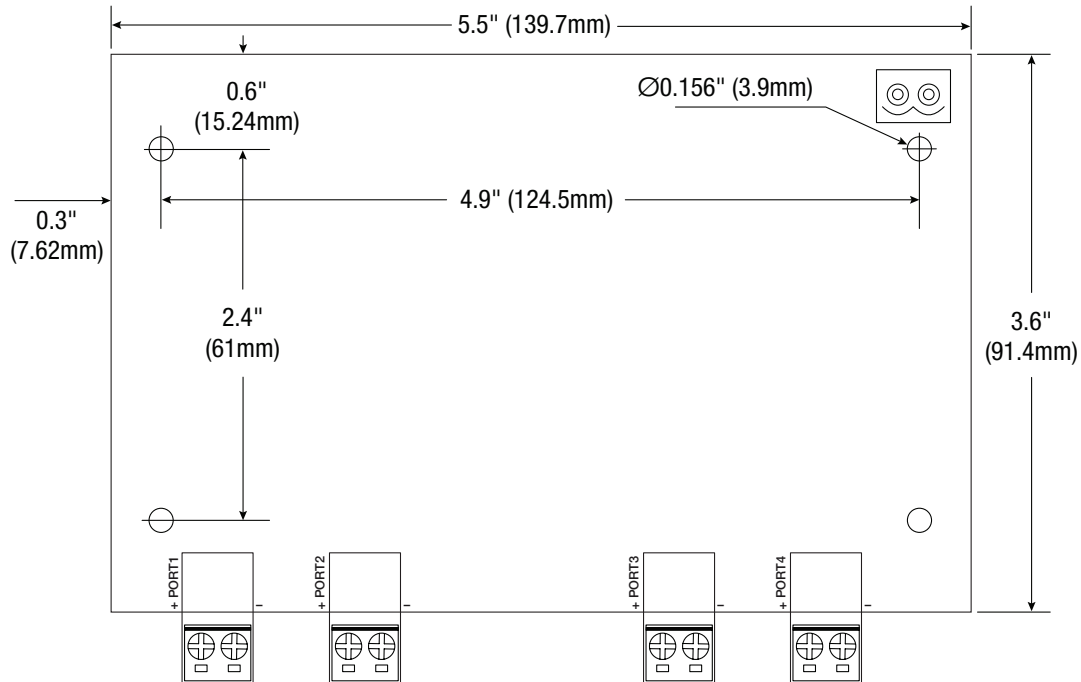

### Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com