

T1PDK724 (Kit)

Access & Power Integration Solution for PDK

Altronix T1PDK724 kit consists of Trove1 enclosure, TPD1 PDK/Altronix backplane with one (1) 24VDC @ 10A power supply/charger. This kit also accommodates up to three (3) PDK PM-07-EIOE-E modules for up to twenty-four (24) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



TROVE™



T1PDK724

PDK boards are not included

Key Features

- 24VDC power supply/charger
- Accommodates up to three (3) PDK PM-07-EIOE-E modules
- Convenient knockout configuration:
 - One (1) double knockout
1.948" (1-1/2" Conduit) / 1.701" (1-1/4" Conduit)
 - Nine (9) double knockouts
1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to two (2) 12VDC/7AH batteries
- Supervision
 - AC Fail
 - Battery Fail and Battery Presence
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

T1PDK724 (Kit)

Access & Power Integration Solution for PDK



Specifications

Power Supply/Charger (AL1024ULXB2):

Input

Voltage	115VAC 60Hz, 4.2A max.
Fusing	5A/250V

Output

Voltage	24VDC
Current	10A @ 24VDC continuous max.
Other	Overvoltage protection Filtered and regulated

Back-up Battery

Capacity	12AH/12VDC (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Indicators (LED)

Input	115VAC is present
DC Output	Powered
Battery	Discharged or not connected

T1PDK7F24 Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information

CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure:	18" x 14.5" x 4.62" (457.2mm x 368.3mm x 118.0mm)
Shipping:	21.75" x 18.25" x 5.75" (552.5mm x 463.6mm x 146.1mm)

Weight (approx.)

Product	15.5 lb. (7.0 kg)
Shipping	19.5 lb. (8.9 kg)

Temperature


Operating	0°C to 49°C (32°F to 120°F)
Storage	- 20°C to 70°C (- 4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr (approx.): 123 BTU/Hr.

Access Controller Position Chart for the Following Models:

PDK	Pem Mounting
PM-07-EIOE-E	(A)

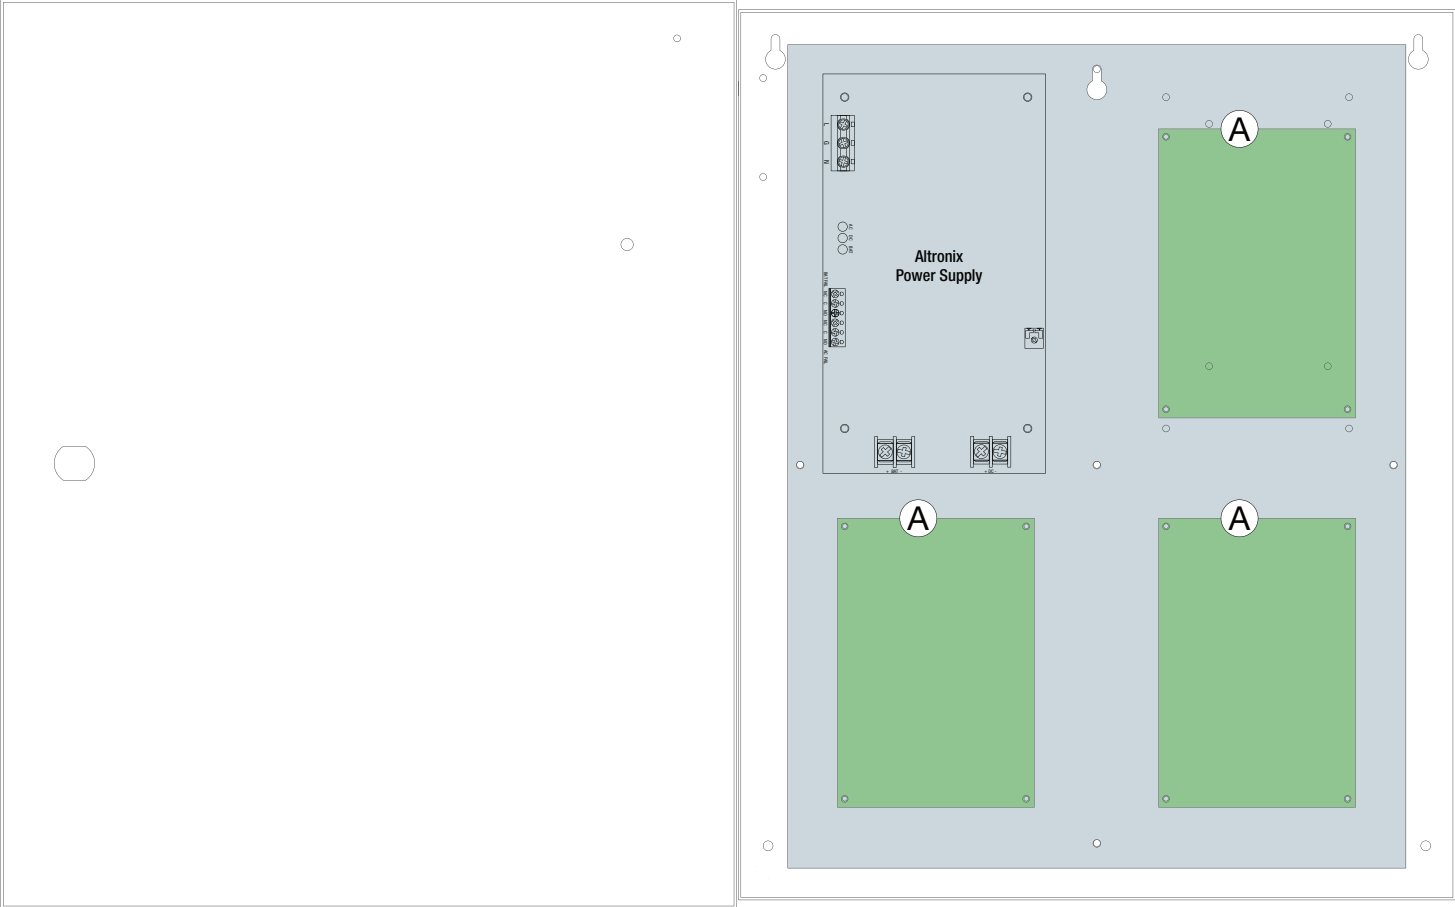

Dimensions and Drawing

Dimensions (H x W x D approximate)

18" x 14.5" x 4.62" (457.2mm x 368.3mm x 118.0mm)

