


IG5 SV Series

IEC 61850-3/IEEE 1613 Hardened Managed 24-port Gigabit (8*PoE) and 4-port 1G/10G SFP+ Ethernet PoE Switch

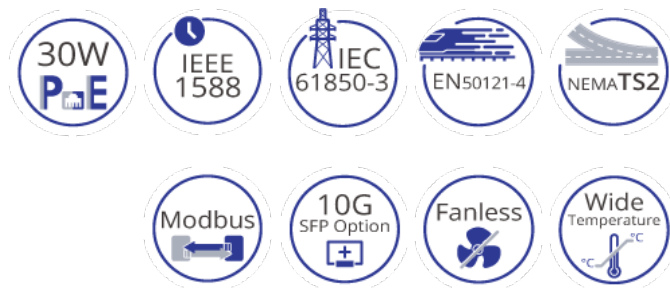

Overview

The **IG5 SV Series** is a **rugged industrial-grade managed PoE switch** engineered for mission-critical networks in harsh environments. Featuring **10G fiber uplinks**, **IEEE 802.3af/at PoE support**, and rich **[Layer 2/3 management](#)**, it is ideal for power utilities, smart cities, and industrial IoT deployments. IG5 SV Series offers **8 PoE ports** (30W per port), combined with 8 or 16 TX ports, while a built-in intelligent controller dynamically allocates a **90W total power budget** for high-efficiency operation.

Designed for flexibility, the IG5 SV Series features a compact form factor, IP40-rated metal housing, and support for **24VDC input**, allowing for easy installation in space-constrained enclosures. Integrated digital I/O and relay control interfaces enable seamless alarm integration and event response. Compliant with **IEC 61850-3**, **IEEE 1613**, and **IEC 60255-27**, the switch is also compatible with **GOOSE messaging (IEC 61850-90-4)** and **[IEEE 1588v2 PTP](#)** for time synchronization. With up to **5kV surge protection**, it is an ideal solution for substations, transportation systems, and smart energy infrastructure.

Highlights

+ High Bandwidth and Versatility

- 24 full gigabit port with multiple configurations
- 4 1G/10G SFP+ uplink ports
- Sufficient switching capacity at 128Gbp
- DnA solutions for Digital I/O & Relay control

+ PoE Features

- 8-port IEEE 802.3 af/at PSE with 90W total power budget
- PoE watchdog monitors status of connected PD devices

+ Layer 3 Functionality

- Static routing, RIP v1/v2, and OSPF
- Redundancy with VRRPv2

+ Flexible Installation

- Support Rack and Panel mount installation
- Concise communication status display
- Considerable ease of cabling management

+ Substation communication and time synchronization

- Complies with IEC61850-90-4 GOOSE and multicast message transmission
- IEEE 1588v2 Available in all ports
- Support One-Step and Two-Step delay measurement mechanism
- Operation as transparent clock

+ Designed for Crucial Environments

- Wide Operation Temperature range from -40 to 75°C(-40 to 167°F)
- Thermal shock and electrical noise resistance

Features

+ Interface

CLI, Telnet, Web GUI

+ Management

Firmware Upgrade
Configuration Backup
DHCP Server/Client
RMON (Remote Monitoring)
Port Mirroring
NTP (Network Time Protocol) Synchronization
LLDP (Link Layer Discovery Protocol)
IPv4/IPv6
SNMP v1/v2c/v3
Modbus

+ Security

MAC Address Filtering
Enable/Disable Port
Storm Control
System Logging
IEEE 802.1x LAN Access Control
Remote Authentication through RADIUS and TACACS+
Complex Password Support
Multi-user Login and Privileged Access Management
SSH for CLI and Telnet Security
SSL and HTTPS for Web Security
ACL (Access Control List, up to 4096 Entries)
IPSG (IP Source guard)
DAI (Dynamic ARP Inspection)
DHCP Snooping

+ Layer 2 Features

Auto-negotiation for Port Speed and Duplex
Flow Control
IEEE 802.3x full duplex mode
Back-pressure half duplex mode

Redundant Protocols

IEEE 802.1D STP
IEEE 802.1w RSTP
IEEE 802.1s MSTP
EtherWAN's Alpha-Ring network fault recovery

VLANs

IEEE 802.1Q Tag VLANs
GVRP
GMRP

Link Aggregation

Static Trunk (4 groups)
IEEE 802.3ad LACP

IGMP Snooping v1/v2/v3

+ Layer 3 Features

IP Packet Routing

Maximum number of routes in hardware:
512 entries
Static Routing
RIP v1/v2
OSPF v2

Routing Redundancy

VRRPv2

+ Quality of Service (QoS)

Priority Queues: 8 Queues Per Port

Traffic Classification Based on IEEE 802.1p CoS (Cost of Service), DSCP (Differentiated Services Code Point), WRR (Weighted Round Robin), and Strict Mode

Rate Limiting (Ingress/Egress)

+ Software Properties and Performance

Switching Fabric

128Gbps

Forwarding Rate

95.23Mpps

Max VLANs

256 (4096 VID)

Jumbo Frame Size

9KB

MAC Table Size

16K

Packet Buffer Memory

12M bits

Specifications

+ Interface

Ethernet

10/100/1000BASE-T(X) PoE: 8 ports (PoE models)

10/100/1000BASE-T(X): 0, 8, 16 or 24 ports

100/1000BASE SFP: 0, 8, 16 or 24 ports

1G/10G SFP+: 4 ports

Console

1 x RJ45

Config Backup

1 x USB (Type A Connector)

Digital Input

2 x Digital Input

Wet Contact: 0-3V for State 0; 13-30V for State 1;

Max input current: 8mA

Dry Contact: Logic Level 1–Close to GND; Logic Level 0-Open

Alarm Contact

2 x Relay output, current capacity

0.5A/48VDC

LED Indicators

Per Unit: Power 1, Power 2 (Green)

Link/Activity (Green)

Per Port: Alarm (Red)

PoE Port: PoE Status (Green)

+ Physical

Casing Material

Metal

IP Rating

IP40

Dimensions

442 x 267 x 44mm (W x D x H)

17.4" x 10.5" x 1.73"

Weight

4.6kg (10.14lbs) / 4.0kg (8.82lbs)

Installation Type

Rack mounting / Panel mounting

+ Environmental

Operating Temp.

-40 to 75°C (-40 to 167°F)

(-40°C to 85°C for IEC 60068-2-2 Environmental 16 hours)

Storage Temp.

-45 to 85°C (-49 to 185°F)

Relative Humidity

5% to 95% (non-condensing)

MTBF

790,907 hours

+ Technology

Standards

IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-TX/100BASE-FX
IEEE 802.3ab 1000BASE-T
IEEE 802.3ae 10Gigabit Ethernet
IEEE 802.3ad link aggregation control
IEEE 802.3z 1000BASE-SX/1000BASE-LX
IEEE 802.1D STP
IEEE 802.1p QoS
IEEE 802.1Q Tag VLANs
IEEE 802.1s MSTP
IEEE 802.1w RSTP
IEEE 802.1x PNAC
IEEE 802.1ab LLDP

Forward/Filtering Rate

14,880pps for 10Mbps
148,810pps for 100Mbps
1,488,100pps for 1000Mbps
14,881,000pps for 10Gbps

Processing Type

Store-and-forward
Auto-negotiation
Half-duplex back-pressure and full-duplex flow control
Auto MDI/MDIX

System Memory

2Gb DDR3 SDRAM

Flash Storage

1Gb

+ Regulatory

ISO

Manufactured in ISO-9001 facility

EMI

FCC Part 15B Class A
VCCI Class A
EN 61000-6-4
BSMI

EMS

EN 61000-6-2
EN 61000-4-2 (ESD)
EN 61000-4-3 (Radiated RFI)
EN 61000-4-4 (Burst)
EN 61000-4-5 (Surge)
EN 61000-4-6 (Induced RFI)
EN 61000-4-8 (Magnetic field)

Safety

UL 62368-1

Vibration

IEC 60068-2-6

Shock

IEC 60068-2-27

Free Fall

IEC 60068-2-31

Traffic

NEMA TS2

Rail

EN 50121-4

Power Substation

IEC 61850-3/IEEE 1613/IEC 60255-27
IEC 61850-90-4

+ Power

Input

24VDC to 48VDC (Nominal)
18 - 60VDC (Operational)
Redundant Power Inputs (Terminal Block)

Power Consumption

50W max. (Without PoE)

Protection

Reverse Polarity Protection
Overload Current Protection

PoE (Available for PoE models)

PoE Modes

- 802.3af/at Mode A: Pins 1/2(-), 3/6(+)

Power Output

- Ports 1-8: 15W Up to 30W/port
- Total Power Budget: 90W

Compliance

- IEEE 802.3af type 1, ≤15.4W PD devices
- IEEE 802.3at type 2, 30W PD devices.

+ Warranty

Length

Limited Lifetime

Details

www.etherwan.com/support/warranty-policy

+ What's Included

Device

Ethernet Switch


Cables

1 Console Cable


Installation

Mounting brackets, screws

Dimensions

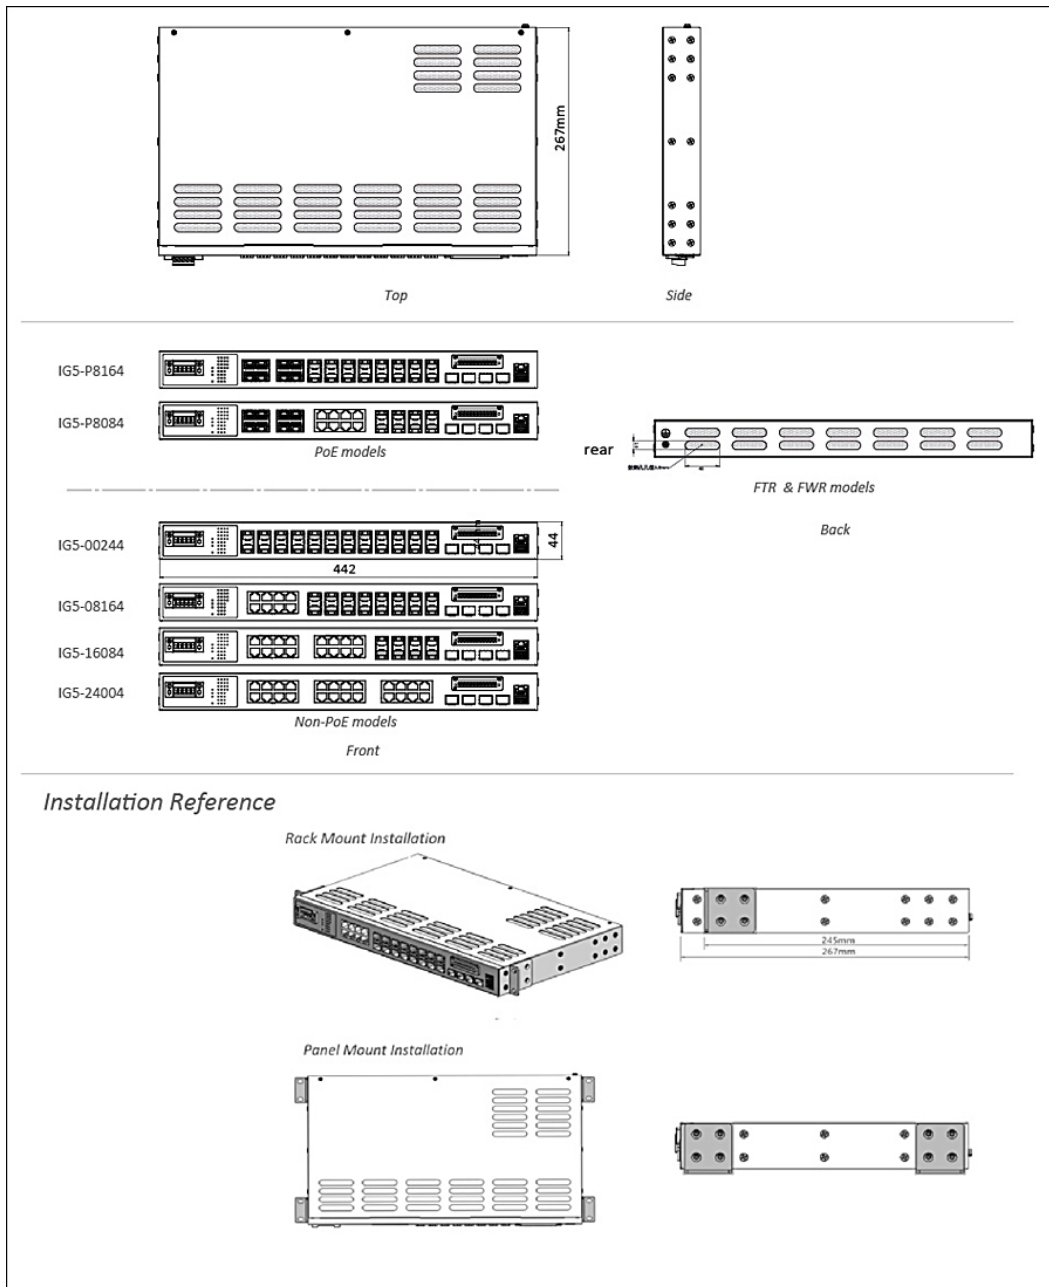


Application

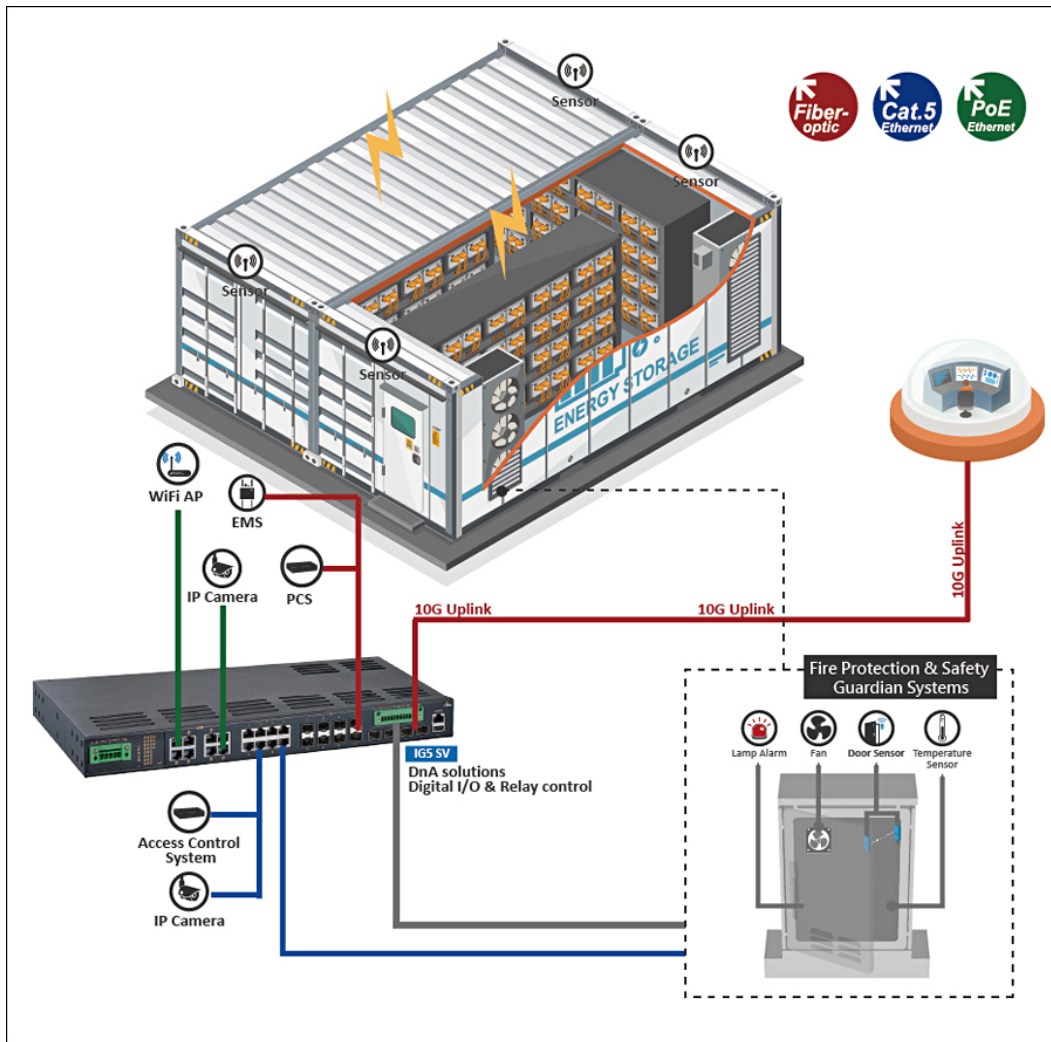

Software

Network Management [eVue™ Network Configuration and Monitoring Tool](#)

Network Discovery [eLite™ Network Discovery and IP Configuration Tool](#)

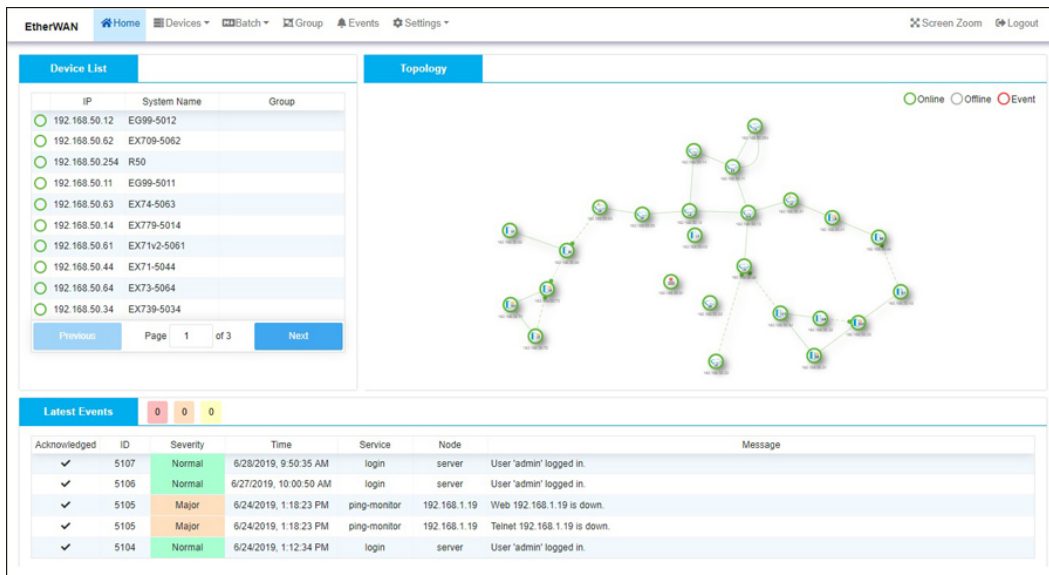

Device List


IP	System Name	Group
192.168.50.12	EG99-5012	
192.168.50.62	EX709-5062	
192.168.50.254	R50	
192.168.50.11	EG99-5011	
192.168.50.63	EX74-5063	
192.168.50.14	EX779-5014	
192.168.50.61	EX71v2-5061	
192.168.50.44	EX71-5044	
192.168.50.64	EX73-5064	
192.168.50.34	EX739-5034	

Topology

Legend: ● Online ○ Offline ○ Event

Latest Events

Acknowledged	ID	Severity	Time	Service	Node	Message
✓	5107	Normal	6/28/2019, 9:50:35 AM	login	server	User 'admin' logged in.
✓	5106	Normal	6/27/2019, 10:00:50 AM	login	server	User 'admin' logged in.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Web 192.168.1.19 is down.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Teinet 192.168.1.19 is down.
✓	5104	Normal	6/24/2019, 1:12:34 PM	login	server	User 'admin' logged in.

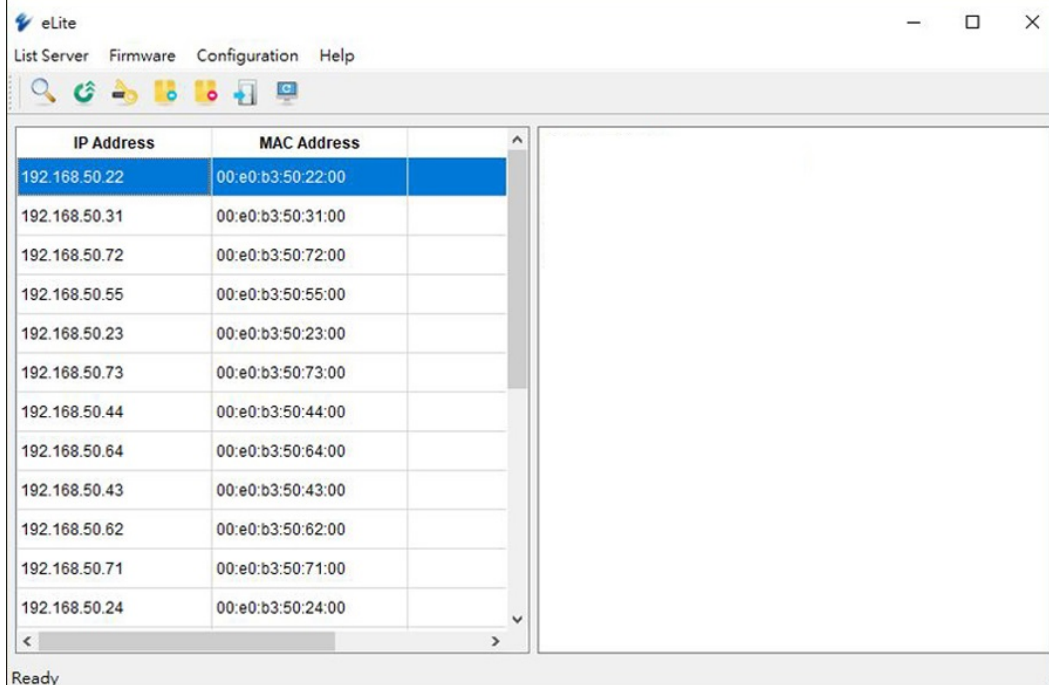

eLite

List Server Firmware Configuration Help

IP Address	MAC Address
192.168.50.22	00:e0:b3:50:22:00
192.168.50.31	00:e0:b3:50:31:00
192.168.50.72	00:e0:b3:50:72:00
192.168.50.55	00:e0:b3:50:55:00
192.168.50.23	00:e0:b3:50:23:00
192.168.50.73	00:e0:b3:50:73:00
192.168.50.44	00:e0:b3:50:44:00
192.168.50.64	00:e0:b3:50:64:00
192.168.50.43	00:e0:b3:50:43:00
192.168.50.62	00:e0:b3:50:62:00
192.168.50.71	00:e0:b3:50:71:00
192.168.50.24	00:e0:b3:50:24:00

Ready

Ordering Info

+ PoE Models

IG5-P8084FTE	8-port 10/100/1000BASE-T(X) PoE + 8-port 10/100/1000BASE-T(X) + 8-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch
IG5-P8164FTE	8-port 10/100/1000BASE-T(X) PoE + 16-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch

+ Non-PoE Models

IG5-24004FTE	24-port 10/100/1000BASE-T(X) + 4-port 1G/10G SFP+ Managed Ethernet Switch
IG5-16084FTE	16-port 10/100/1000BASE-T(X) + 8-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch
IG5-08164FTE	8-port 10/100/1000BASE-T(X) + 16-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch
IG5-00244FTE	24-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch

+ Accessories

Part Number	Speed Info	Mode	Distance	Operating Temperature	Wavelength	DDM
EX-0155NSP-MB2L-A	100Mbps	Multi	2km	-40 to 85°C	1310nm	-
SFPMIS20M	100Mbps	Single	20km	-40 to 85°C	1310nm	✓
SFPGIM5AM	1000Mbps	Multi	275m/550m	-40 to 85°C	850nm	✓
SFPGIM02M	1000Mbps	Multi	2km	-40 to 85°C	1310nm	✓
SFPGIS10M	1000Mbps	Single	10km	-40 to 85°C	1310nm	✓
SFPTIM3AM	10Gbps	Multi	300m	-40 to 85°C	850nm	✓
SFPTIM3AM	10Gbps	Single	10km	-40 to 85°C	1310nm	✓

+ For more SFP, please visit website:

Hardened 100BASE SFP Modules	www.etherwan.com/products/sfp-fiber-transceiver
Hardened Gigabit SFP Modules	www.etherwan.com/products/sfp-fiber-transceiver
Hardened 10G SFP+ Modules	www.etherwan.com/jp/products/sfp-fiber-transceiver
DIN-Rail Power Supplies	www.etherwan.com/jp/products/din-rail-power-supply



© EtherWAN Systems, Inc. All rights reserved. 20250723

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.