

Vent Switch

WWW.GRISK.COM



VS Series

- ◆ Eliminates double magnets
- ◆ Aids in preventing false alarms
- ◆ Linear travel of 6-8 inches
- ◆ Air gap of 1/2" to maintain continuous linear travel
- ◆ Standard switch length 6" or 8"
- ◆ Custom lengths available
- ◆ 36" zip lead standard or screw terminals
- ◆ No need to disarm systems when opening or closing windows
- ◆ Available in white and brown




The unique invention has been designed in response to requests from installers for a switch that would allow window venting of four to six inches before breaking contact and creating an alarm condition.

The GRI Vent Switch will allow the homeowner to arm his system and at the same time permit venting of any window on which the Vent Switch has been installed.

A slider of double hung window can be opened or closed while the GRI vent switch maintains an extended zone of actuation of approximately six inches at 1/2 air gap.

Prior to actual installation it is highly recommended that the installer become familiar with the operation of this switch during a bench test session. A continuity checker would work well in determining the overall area of activation. It is suggested that the homeowner be instructed in its actual operation to prevent an owner-induced alarm. Patent Pending.

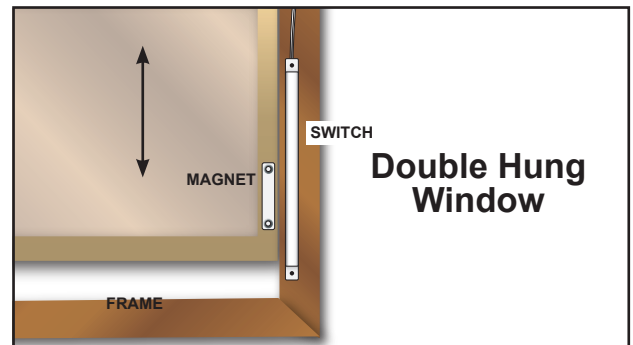

WARRANTY: Lifetime warranty against workmanship, material and factory defects.

GEORGE RISK INDUSTRIES, INC.
G.R.I. PLAZA
KIMBALL, NE 69145

WWW.GRISK.COM



1-800-445-5218
1-800-523-1227
(308) 235-4645
FAX (308) 235-3561
E-MAIL: sales@grisk.com

Vent Switch

WWW.GRISK.COM




INSTALLATION:

The Vent Switch is unique because it will allow a linear movement of the actuator magnet, parallel to the reed switch, of up to 6 inches, depending on model, while maintaining a constantly closed circuit. The linear travel is based upon a maximum air gap distance of half an inch between the switch and magnet.

It is recommended that the switch be located and mounted first, preferably in a position furthest away from the opening, to prevent reach through compromise. Please note the vent switch can be positioned similar to a double magnet set-up. This will allow the homeowner to open and close the window protected by the Vent Switch without having to disarm and rearm the system to reposition the window.

We are confident that the and reliability of the Vent Switch will long be appreciated by the homeowner. Proper instruction by the installer will eliminate the chance of an owner-induced alarm and maintain the maximum effectiveness of the perimeter security system.

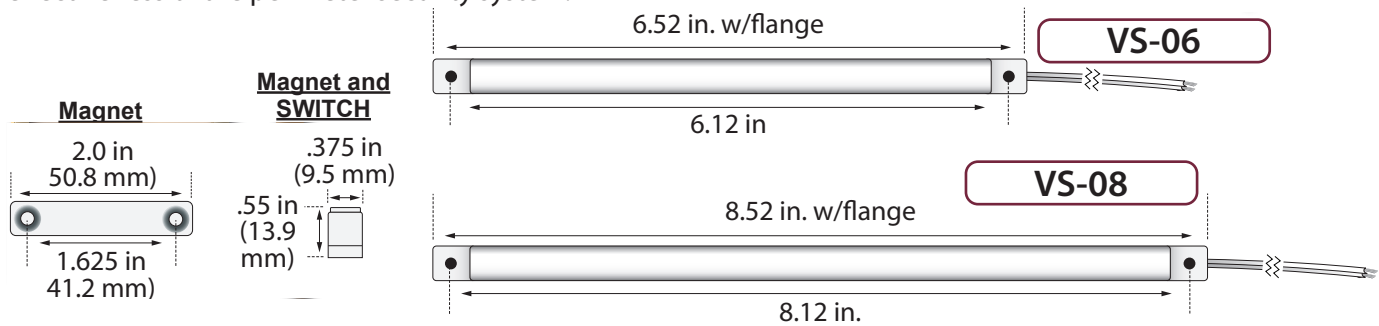

Part Numbers

	Closed Loop	Open Loop
1/2" Air Gap 6" Linear Travel	VS-06 VS-06T	VS-06
1/2" Air Gap 8" Linear Travel	VS-08 VS-08T	VS-08

GR I PRODUCTS MEET OR EXCEED THESE MINIMUM GENERAL SPECIFICATIONS:

Part Number	Loop Type	Electrical Configuration	Reed Form	Initial Contact Resistance (Ω)	Max. Contact Rating	Max. Switching Voltage (V)	Max. Switching Current
VS-06	Closed	N/O	A	.150	10	200	.500
VS-06T	Closed	N/O	A	.150	10	200	.500
VS-08	Closed	N/O	A	.150	10	200	.500
VS-08T	Closed	N/O	A	.150	10	200	.500
VS-06	Open	N/C	B	.140	5	175	.250
VS-08	Open	N/C	B	.140	5	175	.250

WARRANTY: Lifetime warranty against workmanship, material and factory defects.

GEORGE RISK INDUSTRIES, INC.
G.R.I. PLAZA
KIMBALL, NE 69145

WWW.GRISK.COM



1-800-445-5218
1-800-523-1227
(308) 235-4645
FAX (308) 235-3561
E-MAIL: sales@grisk.com