


Premises Copper > Central Office > 1 Pair > 24 AWG

## 1X24 XCW Indoor/Outdoor W/B 1KF305MSP

Part Number: 02-001-13

Status: Available

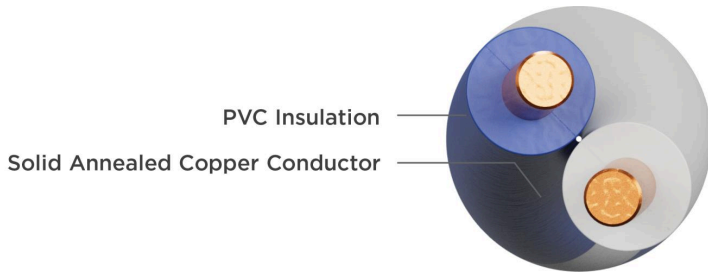

MADE IN THE USA

### GENERAL SPECIFICATIONS

Standards Compliance	UL <sup>®</sup> 444 CSA C22.2 No. 214-08 RoHS-compliant
NRTL Programs	UL, c(UL) Listed CM

### COPPER SPECIFICATIONS

Pairs	1
Conductor	Solid bare copper
Conductor Count	2
AWG (mm)	24 (0.51)

### COPPER SPECIFICATIONS

Insulation	Semi-rigid PVC
Insulation Colors	White/Blue
Characteristic Impedance (Ohms)	100 ± 15

### ENVIRONMENTAL SPECIFICATIONS

Operating Temp. Range	-40/+75
Storage/Shipping Temp. Range	-40/+75

### PHYSICAL CHARACTERISTICS

Pallet Quantity (ft)	32940
Package Length	1000
Package Type	Spool

### Product Description

Indoor/Outdoor Cross-Connect Wire is intended for cross-connecting points in building entrance enclosures at subscriber's premises and/or in Outside Plant (OSP) enclosures. Each insulated conductor is identified by a combination of solid insulation color, except as noted.

### Applications

- Telephony

### SUSTAINABILITY CERTIFICATIONS

