


MBRP

MBRP Muffler Installation Instructions

2220210	2007-2009	Crossfire 800
2240210	2007-2009	F1000
2250110	2007-2011	Crossfire 1000 & 800HO / M1000 / M8
225T109	2009-2011	Crossfire 800HO / M1000

Note: Local regulations may limit or prohibit modification to your snowmobile's emissions system and/or the sound levels that it generates. It is your responsibility to be aware of restrictions that may apply to your intended use of this product.

1. Remove the springs fastening the stock muffler to the frame and the exhaust pipe. (Set these springs safely aside so that they can be reused.)
2. Remove the stock muffler from the belly pan.
3. Remove any of the rubber bushings from the stock muffler and transfer them onto the MBRP muffler.
4. Install the MBRP muffler in the same location as the original equipment, using the stock springs and bushings to secure it in all of the provided locations.

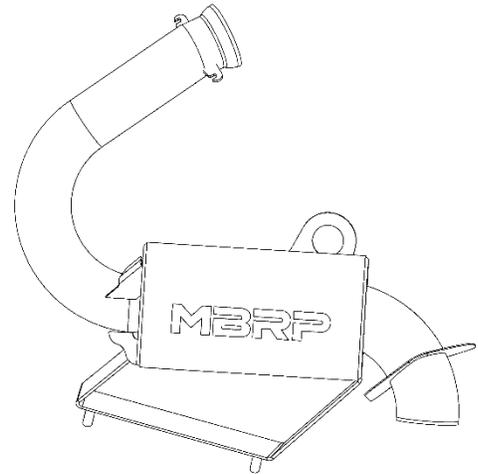

NOTE: To avoid exhaust leaks use a high heat silicone to seal all connections between the expansion chambers and the muffler. Monitor the exhaust for leaks during the first 200 miles after your installation and re-apply silicone where necessary. We suggest having your local snowmobile mechanic or performance shop install this product.

CAUTION: **DO NOT** touch the muffler while the snowmobile is running or shortly after it has run, as it may result in personal injury.

MBRP Ltd. warranty applies for a two (2) year period from the date of purchase to defects in product material and workmanship and is to the original purchaser on record and for the original vehicle for which it was designed and installed. This warranty is limited, at MBRP Ltd sole determination, to the repair or replacement of defective product only and does not include the cost of removal or re-installation, damage by accident, abuse, misuse or misapplication or any consequential damages however they may arise. Determination of warranty coverage shall be at the discretion of an authorized MBRP Ltd quality engineer.