

R8 Rugged Tablet Cradle User's Manual



Package Contents

If any of following items is damaged, please contact your retailer.

Cradle



Key




NOTE

The pictures are for reference only, actual items may slightly differ.


Product Overview

Front

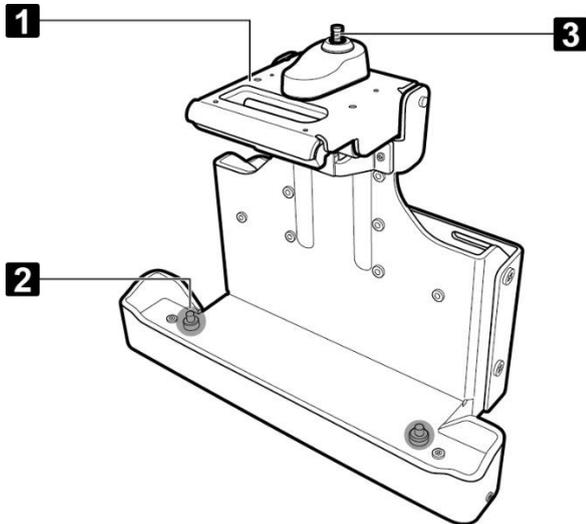

No.	Item
1	Top clamp
2	Alignment pin (x2)
3	Lock (with key slot)

Rear


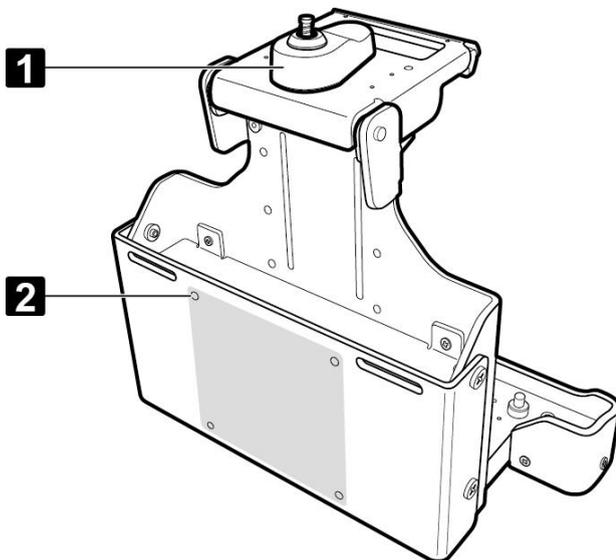


No.	Item
1	Top latch
2	Mounting holes for VESA mount

Unlock the Lock

Lock on the docking cradle was locked during packaging. To unlock lock, do the following:


1. Insert the lock key.
2. Turn it clockwise until a "click" is heard, indicating the lock is released.
3. Turn the key back counterclockwise to remove it from the key slot.
4. Pull the top latch all the way backward to disengage the top clamp.

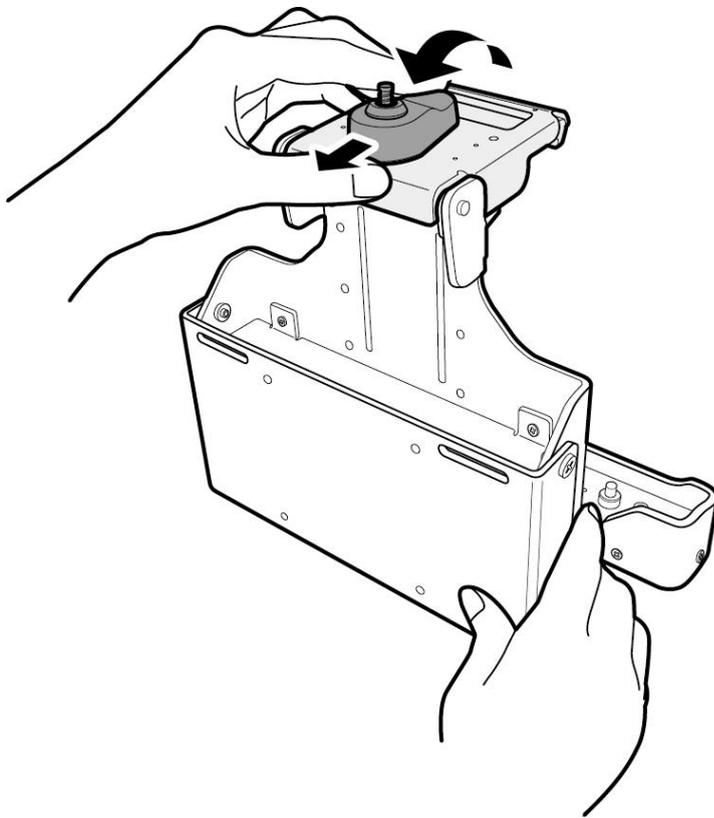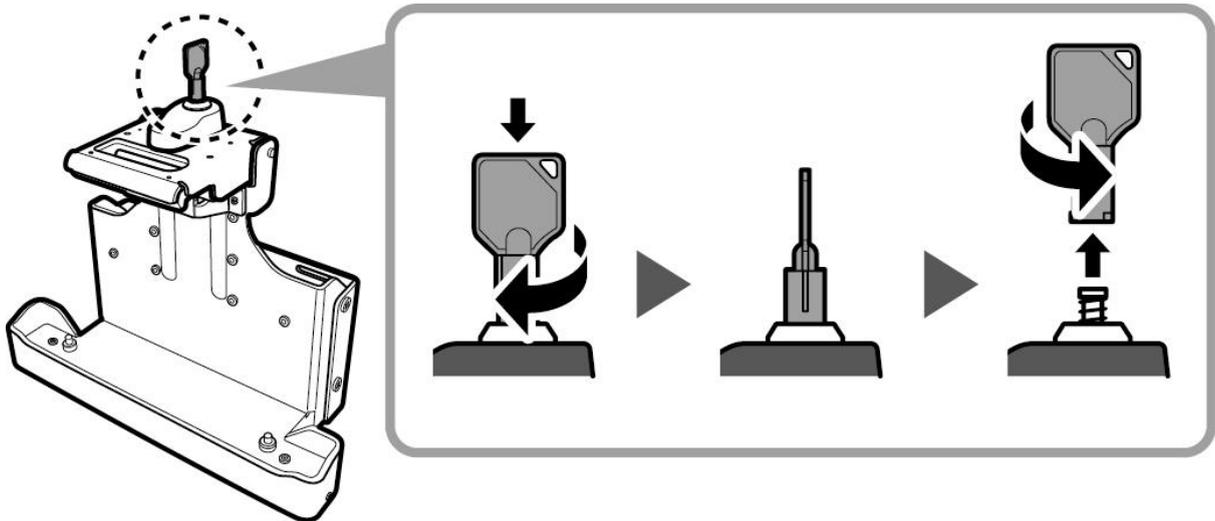


NOTE: Top clamp disengages automatically after the top latch is fully extended.

Docking the Tablet PC


1. With screen side facing out and docking connector down, insert the tablet PC into the alignment pins on docking cradle.

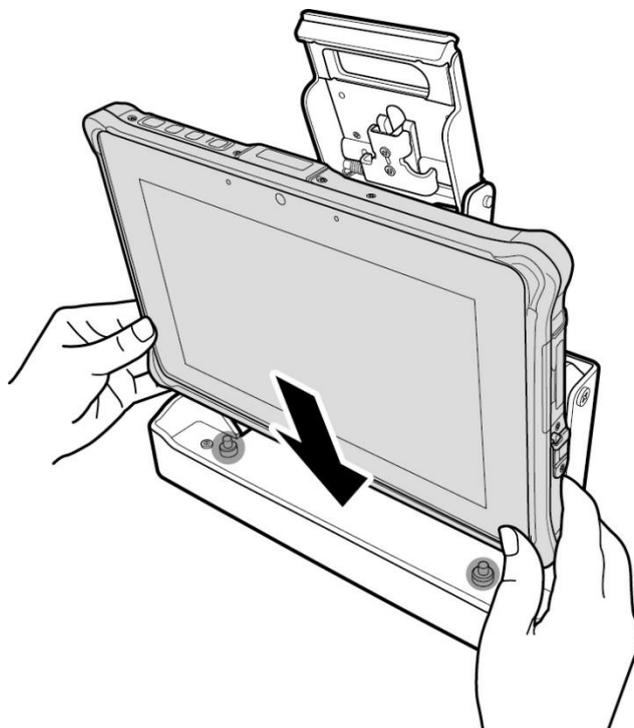

2. Secure the tablet PC by closing the top clamp and then pressing on it firmly until the tablet PC is fully engaged.

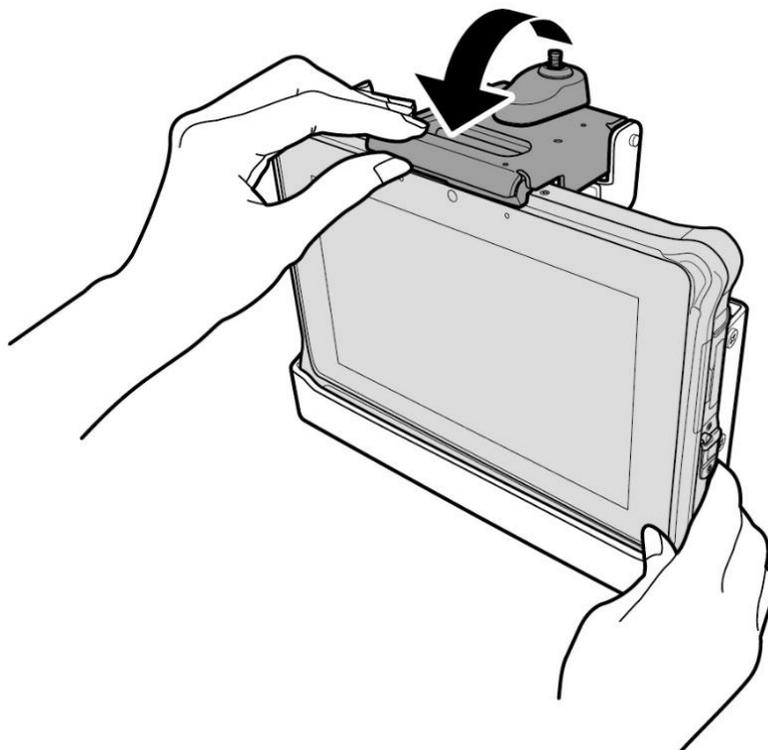


3. Push the top latch all the way forward to secure the top clamp.

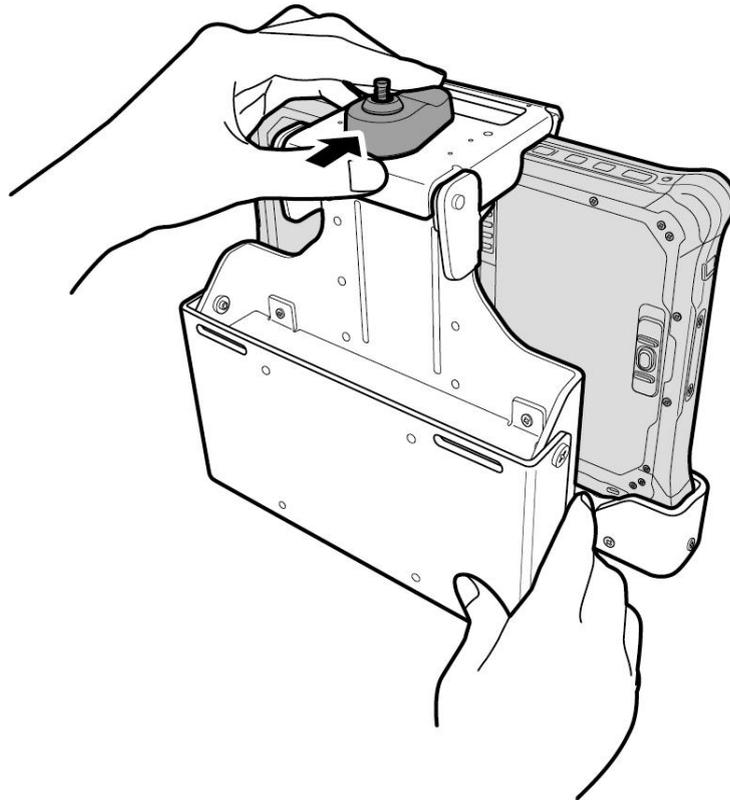


4. Fully push the lock into position to ensure the lock is tightly secured.

NOTE: If the lock cannot be pushed, adjust the lock position, and repeat step 4.

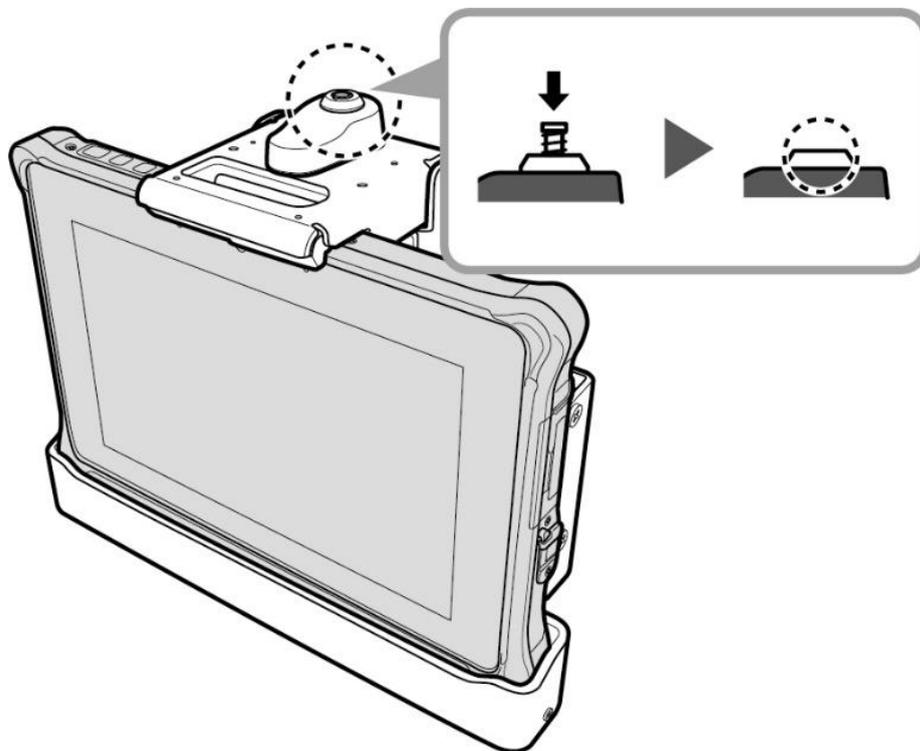


Unlocking the Tablet PC


1. Insert the lock key into the lock and turn clockwise until a “click” is heard. Turn the key back counterclockwise to remove it from the key slot. Refer to the “**Unlock the Lock**” section.

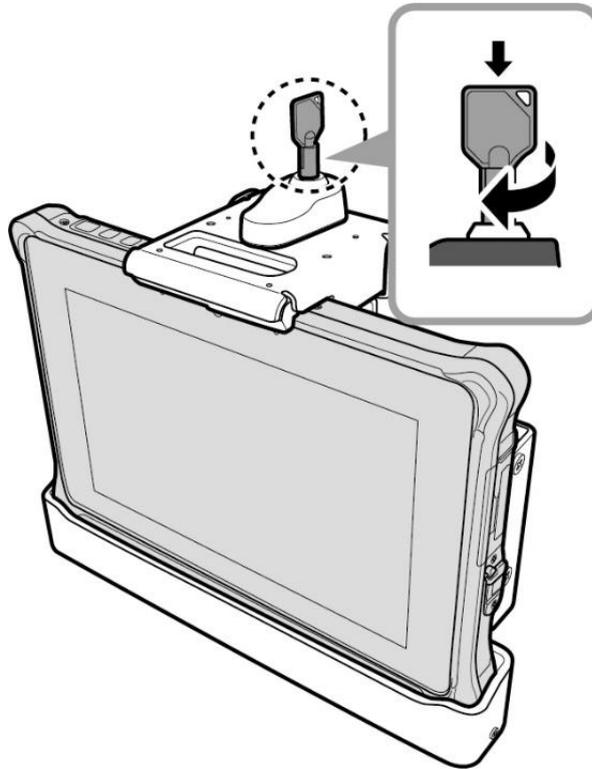

2. Pull the top latch all the way backward to disengage the top clamp.

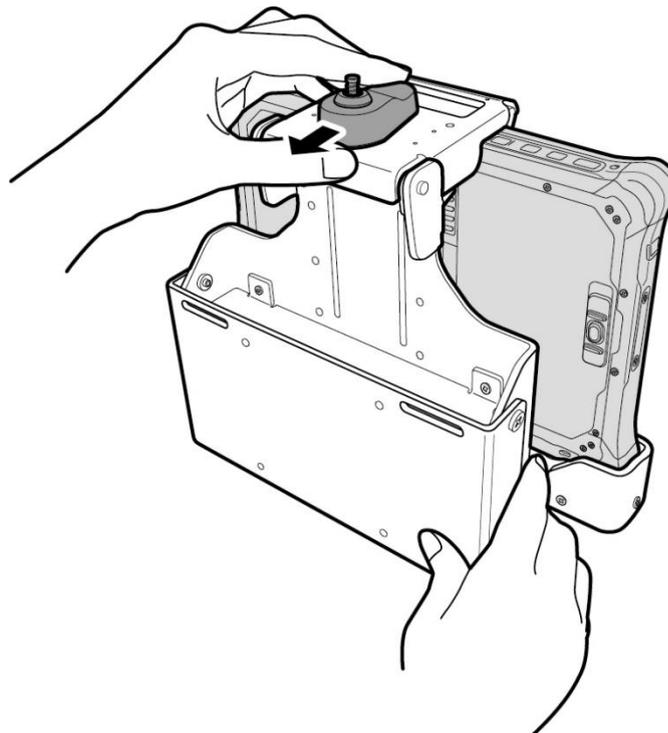

3. While supporting the tablet PC with one hand, open the top clamp.

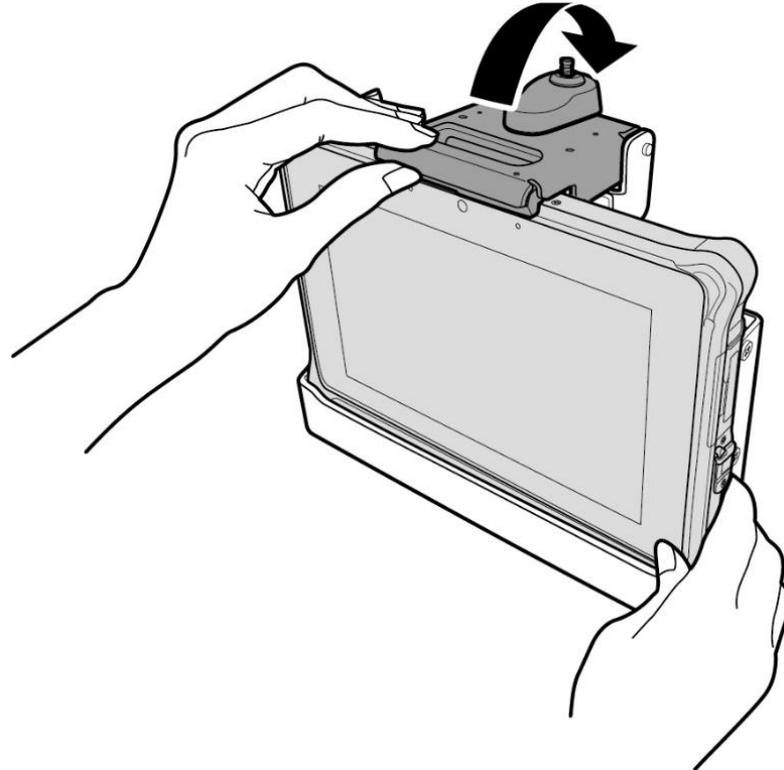

4. Remove the tablet PC from the docking cradle.

