




Be Amazed Quilt Pattern

68" x 68"



NOTE: All seam allowances are 1/4". To achieve the correct seam allowance, use your Baby Lock 1/4" quilting foot. When stitching, line up the raw edge of your fabric with the right side edge of the 1/4" foot, and you will get an accurate seam allowance every time. Set your machine stitch length to 2.5 mm. This will ensure your pieces are stitched securely.

Fabric	Yardage	Cutting Instructions
 Fabric A	2 ½ yards	Cut (24) 2 ½" x WOF Strips Cut (7) 3 ½" x WOF Strips (outer border) Cut (1) 2 ½" x WOF strip -subcut (4) 2 ½" x 2 ½" squares
 Fabric B	2 ¼ yards	Cut (12) 2 ½" x WOF Strips Cut (2) 6 ½" x WOF Strips - subcut (9) 6 ½" x 6 ½" squares Cut (6) 2 ½" x WOF Strips (sashing) - subcut (12) 2 ½" x 18 ½" pieces Cut (6) 2 ½" x WOF Strips (Inside border)
 Binding	⅝ yard	Cut (8) 2 ½" x WOF Strips
Backing	4 ¼ yards	

Piecing

1. Sew together (2) Fabric A 2 ½" x WOF strips with (1) Fabric B 2 ½" x WOF strip. Press seams toward Fabric A. (Make 12 strip sets.)



2. Cut a total of (72) 6 ½" x 6 ½" pieces from all strip sets. You can cut (6) pieces per strip set.




3. Sew (3) strip pieces together as shown to make Unit A. Press seams toward end unit. (Make 18).



4. Sew (1) 6 ½" x 6 ½" Fabric B square between (2) strip pieces as shown to make Unit B. Press seams toward the center square. (Make 9).



5. Sew (1) Unit B piece between (2) Unit A pieces. (Make 9)

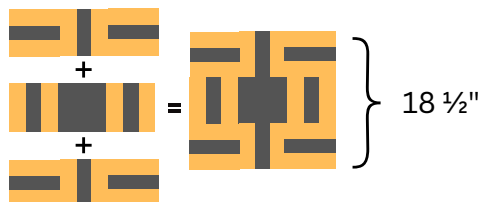

6. Take (3) blocks and lay them out in a row. Turn the middle block 90 degrees.



7. Sew one Fabric B 2 ½" x 18 ½" sashing strip between each block press seams toward the sashing. Repeat to make 2 rows. These are Row 1 and Row 3.



8. Take the remaining (3) blocks and lay them out in a row. Turn the two outer blocks 90 degrees




9. Sew one Fabric B 2 ½" x 18 ½" sashing strip between each block press seams toward sashing. This is Row 2.



10. Sew (2) 2 ½” x 2 ½” Fabric A squares between (3) Fabric B 2 ½” x 18 ½” sashing strips. Press seams toward Fabric B. (Make 2)




11. Sew sashing strip units between each row, matching cornerstones to sashing. Press seams toward sashing rows.

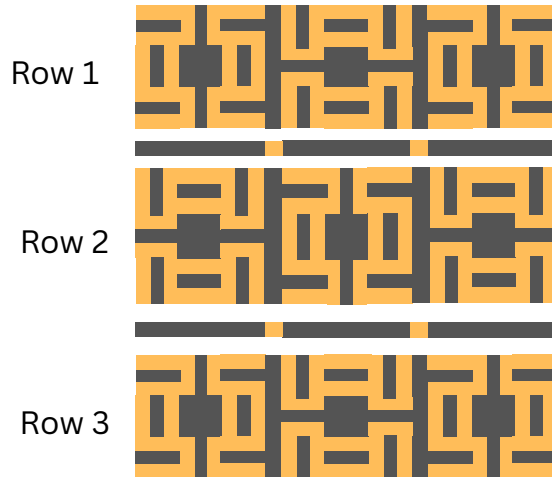


12. Inner Border: Sew (6) Fabric B 2 ½” x WOF strips together end to end. Cut (2) 2 ½” x 58 ½” and (2) 2 ½” x 62 ½”.

13. Sew (1) 2 ½” x 58 ½” strip to left and right sides and (1) 2 ½” x 62 ½” strip to top and bottom. Press seams toward Fabric B.

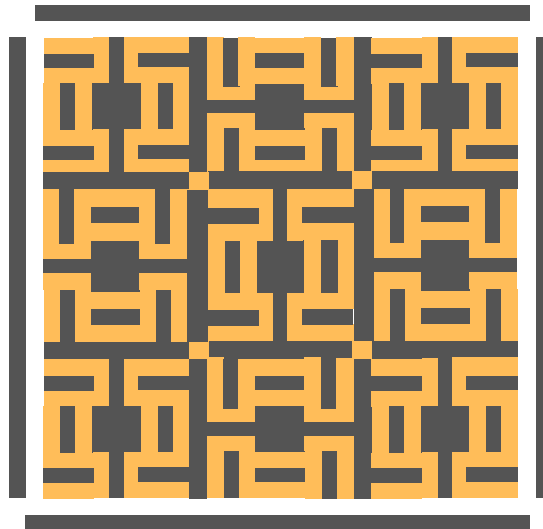

14. Outer border. Sew (7) Fabric A 3 ½” x WOF strips together end to end. Cut (2) 3 ½” x 62 ½” and (2) 3 ½” x 68 ½” strips.

15. Sew (1) 3 ½” x 62 ½” Fabric A strips to left and right sides. Sew (1) 3 ½” x 68 ½” strips to top and bottom. Press seams toward Fabric A.


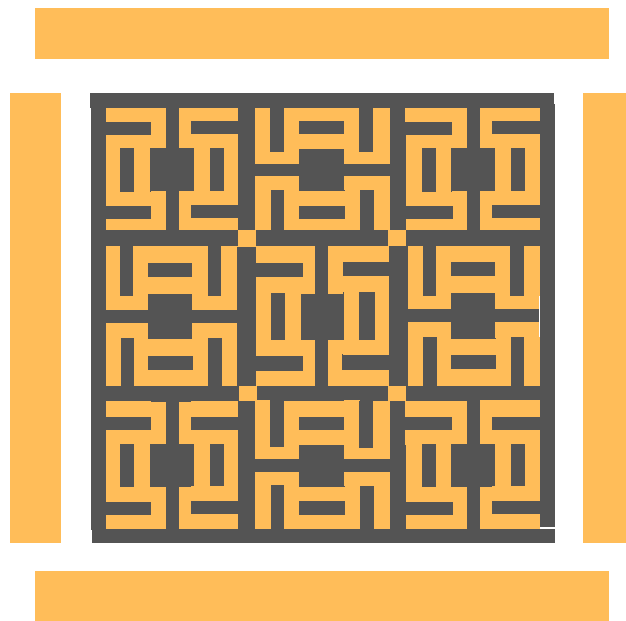


16. Baste, quilt and bind in your preferred method.

For quilting ideas, see the attached sheet that shows how this was quilted.



Sample Free Motion Quilting Plan

Practice drawing your designs on these samples

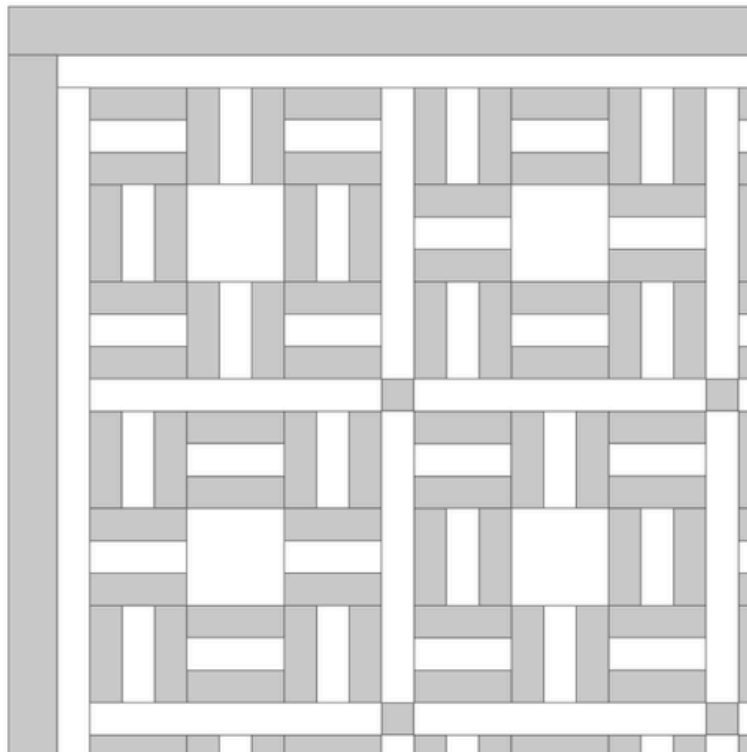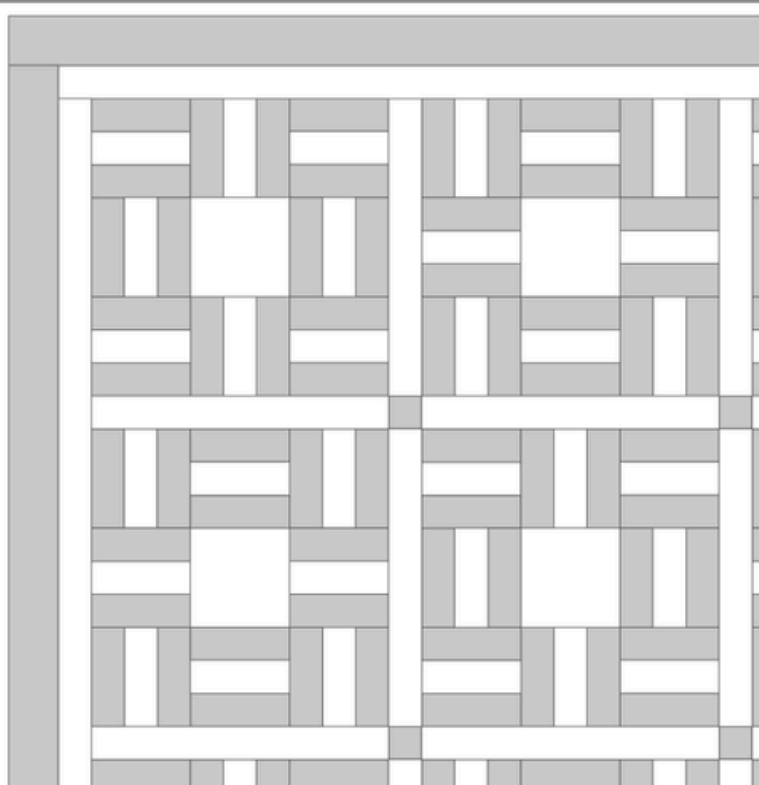

Ribbon Candy

Ribbon Candy



Handwriting practice lines consisting of multiple rows of solid top and bottom lines with a dashed middle line.

Stippling

S^x S S

^x 2 2 2 2

x ~ ~ ~ ~ ~ x ~ ~ ~

