

NH3 gBat 400A/550V DC

Specifications



ETI Code	004725263
Description	NH3 gBat 400A/550V DC
Class name	Fuse link
Rated current (A)	400
Type	NH
Size	NH3
Characteristics	gBat
Rated DC voltage (V)	550
Indicator	Top fuse status indicator
Breaking capacity DC (kA)	30
Power dissipation (W)	76
Standards	IEC 60269-7
Power dissipation (0,7x In) (W)	34,2
Operating joule integral (A2s)	139.840
L/R (ms)	3
Prearcing joule integral (A2s)	32.000
Application	Battery protection
efuse	1

Online product page 

Other documentation




Technical data catalogue
3D Model
Instruction manual
CE declaration
Eplan file

ETIM international clasification

Classification	EC000055
Class name	Low Voltage HRC fuse
Construction size	NH3
Rated current	400
Rated voltage	550
Voltage type	DC
Rated switching capacity	30
Utilization category	Other
Type of fuse status indicator	Top fuse status indicator
Insulated metal gripping lugs (IMGL)	

Characteristics

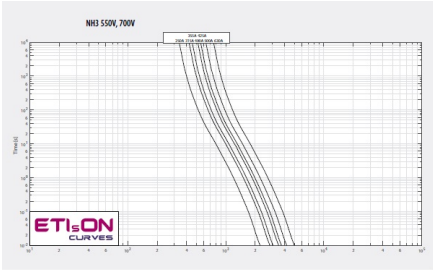

Dimension drawing

