

# NH3 gBat 400A/700V DC

## Specifications



|                                 |                           |
|---------------------------------|---------------------------|
| ETI Code                        | 004725293                 |
| Description                     | NH3 gBat 400A/700V DC     |
| Class name                      | Fuse link                 |
| Rated current (A)               | 400                       |
| Type                            | NH                        |
| Size                            | NH3                       |
| Characteristics                 | gBat                      |
| Rated DC voltage (V)            | 700                       |
| Indicator                       | Top fuse status indicator |
| Breaking capacity DC (kA)       | 30                        |
| Power dissipation (W)           | 76                        |
| Standards                       | IEC 60269-7               |
| Power dissipation (0,7x In) (W) | 34,2                      |
| Operating joule integral (A2s)  | 160.000                   |
| L/R (ms)                        | 3                         |
| Prearcing joule integral (A2s)  | 32.000                    |
| Application                     | Battery protection        |
| efuse                           | 1                         |

Online product page

## Other documentation




Technical data catalogue  
Instruction manual  
CE declaration  
Eplan file

## ETIM international clasification

|                                      |                           |
|--------------------------------------|---------------------------|
| Classification                       | EC000055                  |
| Class name                           | Low Voltage HRC fuse      |
| Construction size                    | NH3                       |
| Rated current                        | 400                       |
| Rated voltage                        | 700                       |
| Voltage type                         | DC                        |
| Rated switching capacity             | 30                        |
| Utilization category                 | Other                     |
| Type of fuse status indicator        | Top fuse status indicator |
| Insulated metal gripping lugs (IMGL) |                           |

# Characteristics

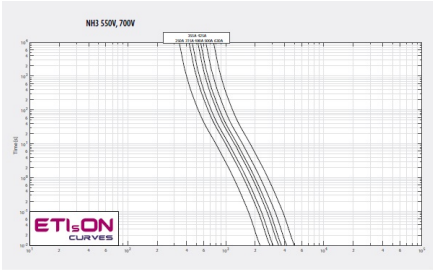

# Dimension drawing

