



Pile BNS[®]

sheet-pile.com/iz-pile


PilePro[®] Sheet Pile Connectors




PZ 90




Colt




Cobra




PZ Tee



Joker




Bullhead



PZT-S


Sheet Pile LLC is the owner and assignee of US 7,390,145, related to these connectors.

Configuration A

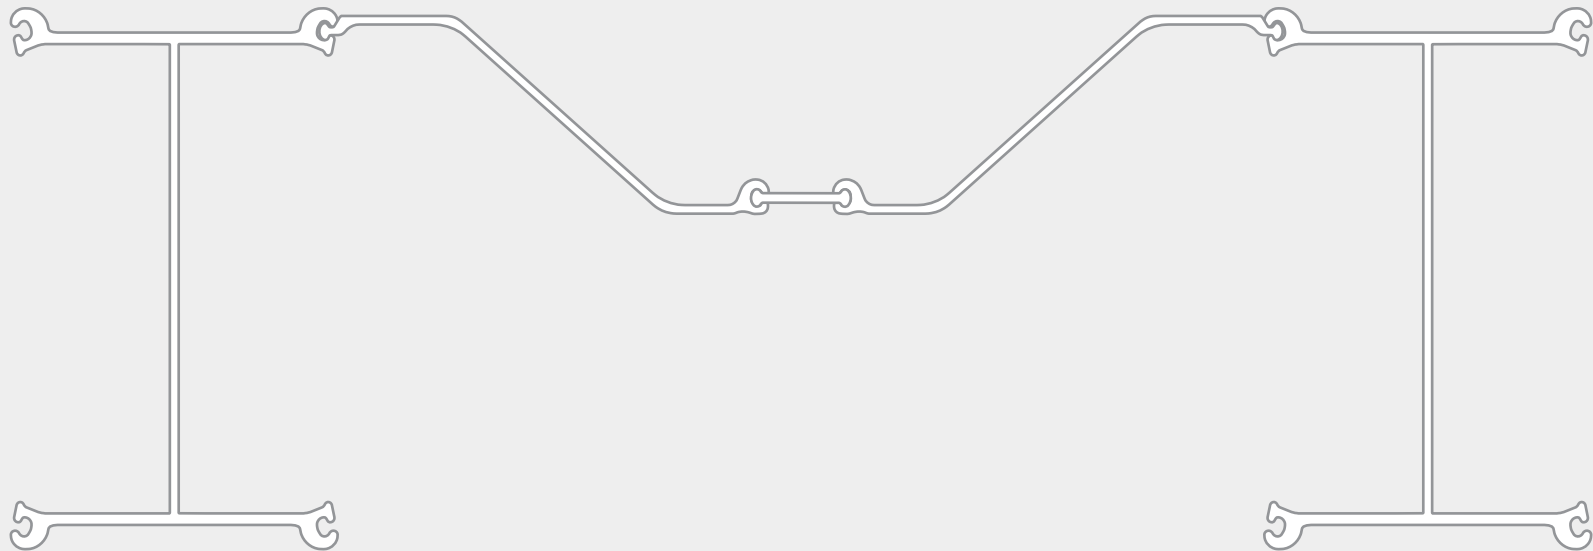

SECTION NAME:

85 - 1983



Section width in mm


Section modulus (elastic) in $\text{cm}^3/\text{m} \div 100$

These are examples from a large variety of possible IZ-Pile solutions.

Please configure your own system on sheet-pile.com/iz-pile


Sheet Pile LLC is the owner and assignee of numerous patents and IP, that may be related to this sheet pile solution.

Configuration B

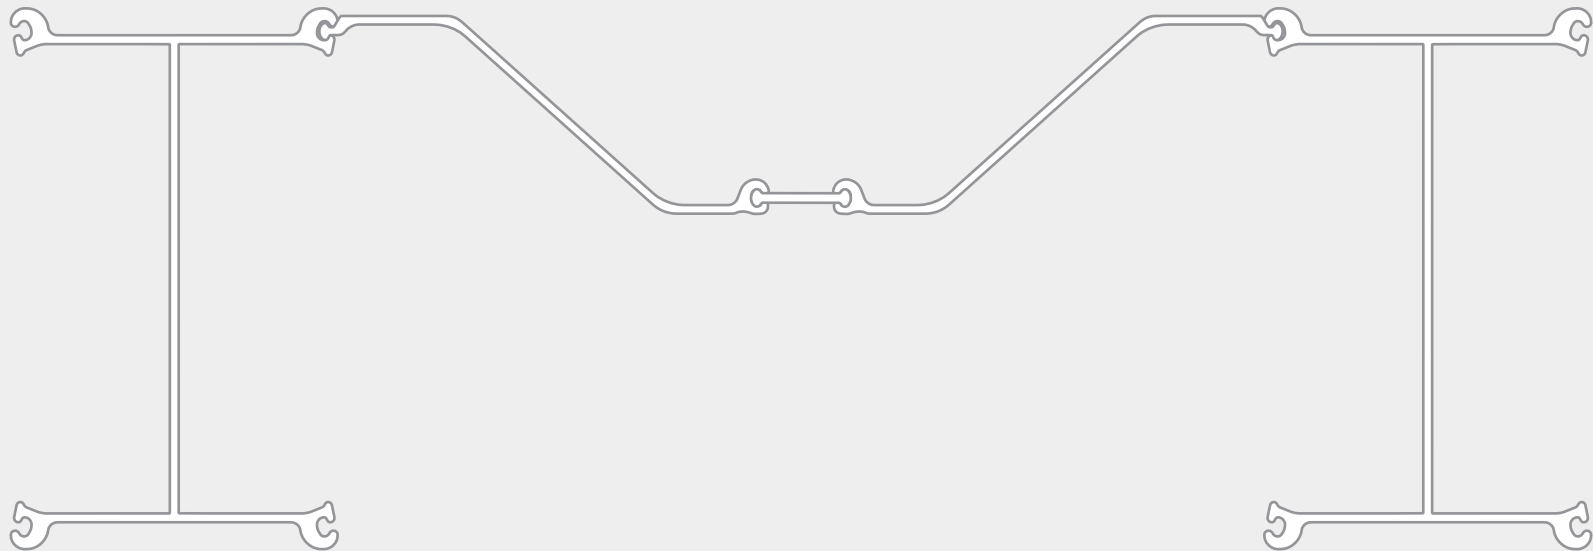

SECTION NAME:

49 - 2055




Section modulus (elastic) in $\text{cm}^3/\text{m} \div 100$

These are examples from a large variety of possible IZ-Pile solutions.

Please configure your own system on sheet-pile.com/iz-pile


Sheet Pile LLC is the owner and assignee of numerous patents and IP, that may be related to this sheet pile solution.

Configuration C

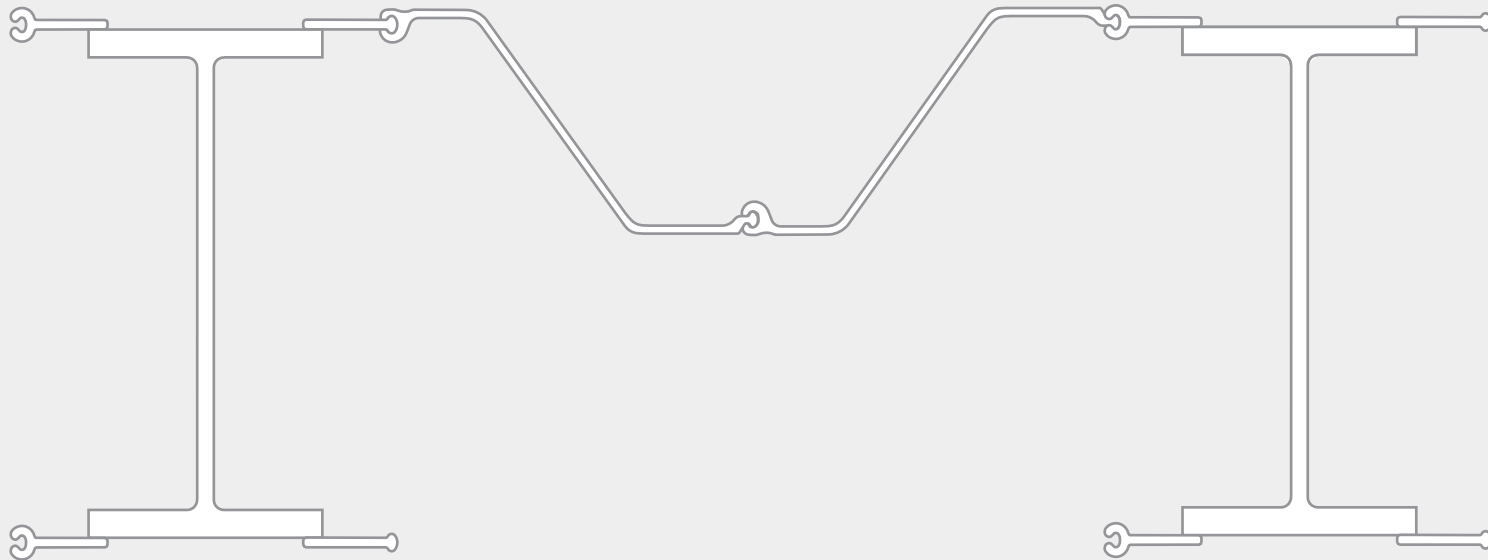

SECTION NAME:

79 - 2045



Section width in mm

Section modulus (elastic) in $\text{cm}^3/\text{m} \div 100$

These are examples from a large variety of possible IZ-Pile solutions.

Please configure your own system on sheet-pile.com/iz-pile


Sheet Pile LLC is the owner and assignee of numerous patents and IP, that may be related to this sheet pile solution.

Configuration D



SECTION NAME:

85 - 1901



Section width in mm

Section modulus (elastic) in $\text{cm}^3/\text{m} \div 100$

These are examples from a large variety of possible IZ-Pile solutions.

Please configure your own system on sheet-pile.com/iz-pile

Sheet Pile LLC is the owner and assignee of numerous patents and IP, that may be related to this sheet pile solution.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
27-1782	IZ	50.2	70.2	32.4	36.3	40.2	329.3	12.2	11.22	W12X120	D1
		2700.6	1782.0	158.0	177.1	196.3	44964.4	3.72	3.42	W310X179	
27-1948	IZ	50.3	76.7	27.5	31.4	35.3	426.9	12.2	11.22	W16X100	C1
		2705.5	1948.4	134.3	153.2	172.2	58303.2	3.72	3.42	W410X149	
27-1532	IZ	50.3	60.3	24.7	29.3	33.9	523.0	12.2	11.22	W21X55	D2
		2705.5	1531.6	120.7	143.0	165.3	71426.0	3.72	3.42	W530X82	
27-1681	IZ	50.3	66.2	27.5	31.7	35.8	539.0	12.2	11.22	W21X83	D1
		2706.1	1681.0	134.3	154.6	174.9	73605.4	3.72	3.42	W530X123	
27-1697	IZ	50.4	66.8	26.0	30.1	34.3	603.4	12.2	11.22	W24X76	D1
		2710.3	1697.0	127.0	147.1	167.3	82393.0	3.72	3.42	W610X113	
27-1514	IZ	50.4	59.6	25.0	29.6	34.3	456.8	12.2	11.22	W18X55	D2
		2712.3	1513.6	122.2	144.7	167.3	62382.6	3.72	3.42	W460X82	
27-2056	IZ	50.5	81.0	28.9	32.6	36.2	365.6	12.2	11.22	W14X120	C1
		2713.2	2056.4	141.0	158.9	176.9	49923.5	3.72	3.42	W360X179	
27-1895	IZ	50.5	74.6	25.3	29.3	33.3	540.4	12.2	11.22	W21X83	C1
		2713.3	1895.4	123.5	143.0	162.5	73802.3	3.72	3.42	W530X123	
27-2087	IZ	50.8	82.2	28.7	32.3	35.9	401.5	12.2	11.22	HP16x121	C1
		2729.0	2086.6	140.0	157.8	175.5	54834.1	3.72	3.42	HP410x181	
27-1911	IZ	51.0	75.3	24.0	28.0	31.9	610.3	12.2	11.22	W24X76	C1
		2741.7	1911.4	117.2	136.5	155.8	83347.4	3.72	3.42	W610X113	
28-1501	IZ	51.1	59.1	25.2	29.9	34.6	602.6	12.2	11.22	W24X55	D2
		2747.7	1500.6	123.2	146.0	168.8	82294.7	3.72	3.42	W610X82	
28-1734	IZ	51.2	68.3	29.9	33.9	38.0	434.0	12.2	11.22	W16X100	D1
		2750.2	1734.0	146.0	165.7	185.4	59267.9	3.72	3.42	W410X149	
28-1729	IZ	51.2	68.1	23.7	28.1	32.5	466.6	12.2	11.22	W18X60	C2
		2752.4	1729.0	115.9	137.3	158.7	63717.4	3.72	3.42	W460X89	
28-1504	IZ	51.2	59.2	25.5	30.2	34.8	420.3	12.2	11.22	W16X57	D2
		2753.0	1503.6	124.5	147.3	170.0	57400.9	3.72	3.42	W410X85	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
28-1966	IZ	51.3	77.4	26.6	30.4	34.3	476.7	12.2	11.22	W18X97	C1
		2758.2	1966.4	129.8	148.6	167.4	65094.6	3.72	3.42	W460X144	
28-1703	IZ	51.4	67.0	23.5	28.0	32.4	541.8	12.2	11.22	W21X57	C2
		2766.0	1703.0	114.9	136.6	158.3	73991.1	3.72	3.42	W530X85	
28-1715	IZ	51.5	67.5	23.1	27.5	31.9	606.8	12.2	11.22	W24X55	C2
		2766.6	1715.0	112.7	134.3	155.8	82859.9	3.72	3.42	W610X82	
28-1489	IZ	51.7	58.6	25.8	30.5	35.2	544.3	12.2	11.22	W21X57	D2
		2778.9	1488.6	125.8	148.8	171.7	74335.1	3.72	3.42	W530X85	
28-1998	IZ	51.8	78.7	32.1	35.9	39.7	348.0	12.2	11.22	W12X136	C1
		2787.4	1998.4	156.8	175.3	193.8	47524.8	3.72	3.42	W310X202	
28-1842	IZ	51.9	72.5	31.3	35.1	38.9	375.7	12.2	11.22	W14X120	D1
		2788.4	1842.0	152.8	171.4	189.9	51306.1	3.72	3.42	W360X179	
28-1752	IZ	51.9	69.0	28.9	32.9	36.9	482.5	12.2	11.22	W18X97	D1
		2792.2	1752.0	140.9	160.4	179.9	65896.4	3.72	3.42	W460X144	
28-1872	IZ	52.0	73.7	31.0	34.8	38.5	411.4	12.2	11.22	HP16x121	D1
		2796.2	1872.2	151.6	169.8	188.1	56184.3	3.72	3.42	HP410x181	
28-1515	IZ	52.1	59.6	26.0	30.6	35.2	475.3	12.2	11.22	W18X60	D2
		2803.5	1514.6	126.8	149.3	171.9	64900.8	3.72	3.42	W460X89	
28-1797	IZ	52.3	70.7	24.2	28.4	32.6	427.4	12.2	11.22	W16X67	C2
		2812.7	1797.0	118.1	138.6	159.2	58363.0	3.72	3.42	W410X100	
28-1730	IZ	52.7	68.1	24.6	28.9	33.3	483.3	12.2	11.22	W18X65	C2
		2832.7	1730.0	119.9	141.3	162.6	66002.1	3.72	3.42	W460X97	
29-1746	IZ	53.0	68.7	23.9	28.2	32.5	556.0	12.2	11.22	W21X62	C2
		2849.0	1746.0	116.6	137.7	158.9	75925.1	3.72	3.42	W530X92	
29-2057	IZ	53.2	81.0	30.6	34.3	37.9	389.4	12.2	11.22	W14X132	C1
		2858.8	2057.4	149.3	167.3	185.2	53174.3	3.72	3.42	W360X196	
29-1532	IZ	53.5	60.3	26.1	30.7	35.2	561.2	12.2	11.22	W21X62	D2
		2875.8	1531.6	127.4	149.7	172.0	76638.9	3.72	3.42	W530X92	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
29-1935	IZ	53.5	76.2	25.6	29.5	33.4	409.5	12.2	11.22	HP16x88	C2
		2876.2	1935.5	124.8	143.9	163.0	55925.6	3.72	3.42	HP410x131	
29-1784	IZ	53.5	70.2	35.0	38.9	42.9	359.2	12.2	11.22	W12X136	D1
		2876.7	1784.0	171.0	190.1	209.3	49047.6	3.72	3.42	W310X202	
29-1897	IZ	53.7	74.7	26.9	30.9	34.9	580.5	12.2	11.22	W21X93	C1
		2887.7	1897.4	131.3	150.7	170.2	79267.8	3.72	3.42	W530X138	
29-1967	IZ	53.8	77.5	28.0	31.8	35.7	503.7	12.2	11.22	W18X106	C1
		2890.2	1967.4	136.6	155.4	174.1	68787.3	3.72	3.42	W460X158	
29-1516	IZ	53.8	59.7	26.9	31.5	36.1	493.3	12.2	11.22	W18X65	D2
		2891.0	1515.6	131.3	153.9	176.4	67361.4	3.72	3.42	W460X97	
29-1683	IZ	53.9	66.3	29.3	33.4	37.6	582.2	12.2	11.22	W21X93	D1
		2896.4	1683.0	143.0	163.3	183.6	79507.3	3.72	3.42	W530X138	
29-1583	IZ	53.9	62.3	26.4	30.8	35.2	440.4	12.2	11.22	W16X67	D2
		2898.1	1582.6	128.7	150.3	171.9	60136.0	3.72	3.42	W410X100	
29-1698	IZ	54.1	66.8	27.4	31.5	35.7	651.4	12.2	11.22	W24X84	D1
		2907.2	1698.0	133.9	154.0	174.1	88959.9	3.72	3.42	W610X125	
29-1502	IZ	54.3	59.1	26.6	31.3	35.9	644.9	12.2	11.22	W24X62	D2
		2920.7	1501.6	129.9	152.7	175.4	88060.1	3.72	3.42	W610X92	
29-1912	IZ	54.3	75.3	25.2	29.2	33.2	654.6	12.2	11.22	W24X84	C1
		2921.4	1912.4	123.3	142.6	161.9	89395.9	3.72	3.42	W610X125	
29-1716	IZ	54.4	67.6	24.3	28.7	33.1	645.4	12.2	11.22	W24X62	C2
		2923.4	1716.0	118.6	140.1	161.7	88139.4	3.72	3.42	W610X92	
29-1731	IZ	54.4	68.1	25.7	30.0	34.4	502.2	12.2	11.22	W18X71	C2
		2924.3	1731.0	125.3	146.6	168.0	68574.2	3.72	3.42	W460X106	
29-1753	IZ	54.6	69.0	30.4	34.4	38.4	511.6	12.2	11.22	W18X106	D1
		2935.7	1753.0	148.5	168.0	187.5	69869.7	3.72	3.42	W460X158	
30-1843	IZ	54.8	72.6	33.2	37.0	40.8	401.2	12.2	11.22	W14X132	D1
		2945.9	1843.0	162.1	180.6	199.2	54792.9	3.72	3.42	W360X196	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
30-1798	IZ	55.1	70.8	25.9	30.1	34.3	455.1	12.2	11.22	W16X77	C2
		2959.7	1798.0	126.3	146.9	167.4	62154.2	3.72	3.42	W410X114	
30-1817	IZ	55.2	71.5	25.2	29.4	33.6	502.8	12.2	11.22	W18X76	C2
		2966.2	1817.0	123.2	143.6	163.9	68666.7	3.72	3.42	W460X113	
30-2000	IZ	55.2	78.8	34.6	38.4	42.2	378.2	12.2	11.22	W12X152	C1
		2968.5	2000.4	168.8	187.3	205.8	51652.5	3.72	3.42	W310X226	
30-1747	IZ	55.3	68.8	24.9	29.2	33.5	584.1	12.2	11.22	W21X68	C2
		2970.8	1747.0	121.4	142.6	163.8	79764.9	3.72	3.42	W530X101	
30-1721	IZ	55.5	67.8	27.7	31.8	35.9	424.5	12.2	11.22	HP16x88	D2
		2981.6	1721.0	135.5	155.3	175.2	57973.8	3.72	3.42	HP410x131	
30-2090	IZ	55.5	82.3	31.6	35.2	38.8	443.7	12.2	11.22	HP16x141	C1
		2982.0	2089.8	154.1	171.8	189.5	60594.4	3.72	3.42	HP410x211	
30-1517	IZ	55.6	59.7	28.2	32.8	37.4	513.7	12.2	11.22	W18X71	D2
		2991.3	1516.6	137.5	160.0	182.5	70144.8	3.72	3.42	W460X106	
30-2077	IZ	55.9	81.8	32.2	35.9	39.5	413.0	12.2	11.22	W14X145	C1
		3007.8	2077.4	157.3	175.1	192.9	56395.8	3.72	3.42	W360X216	
30-1533	IZ	56.0	60.3	27.2	31.8	36.4	591.7	12.2	11.22	W21X68	D2
		3009.2	1532.6	132.9	155.2	177.5	80797.8	3.72	3.42	W530X101	
30-1722	IZ	56.2	67.8	27.1	31.2	35.3	749.7	12.2	11.22	W27X84	D1
		3019.9	1722.0	132.5	152.3	172.1	102375.2	3.72	3.42	W690X125	
30-2134	IZ	56.3	84.0	30.0	33.6	37.1	493.9	12.2	11.22	HP18x135	C1
		3029.3	2134.2	146.6	164.0	181.3	67440.9	3.72	3.42	HP360x202	
30-1995	IZ	56.5	78.6	26.9	30.6	34.4	603.6	12.2	11.22	W21X101	C1
		3035.7	1995.4	131.1	149.6	168.2	82420.6	3.72	3.42	W530X150	
30-1603	IZ	56.6	63.1	27.5	31.9	36.3	516.0	12.2	11.22	W18X76	D2
		3043.7	1602.6	134.5	155.8	177.1	70462.0	3.72	3.42	W460X113	
31-1936	IZ	56.7	76.2	25.0	28.9	32.8	756.5	12.2	11.22	W27X84	C1
		3047.6	1936.4	122.1	141.2	160.3	103312.1	3.72	3.42	W690X125	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
31-1765	IZ	56.7	69.5	24.6	28.9	33.2	673.2	12.2	11.22	W24X68	C2
		3048.9	1765.0	120.2	141.1	162.1	91924.7	3.72	3.42	W610X101	
31-1584	IZ	56.9	62.3	28.3	32.7	37.1	470.3	12.2	11.22	W16X77	D2
		3058.4	1583.6	138.1	159.7	181.2	64226.1	3.72	3.42	W410X114	
31-1937	IZ	56.9	76.3	27.7	31.6	35.6	441.1	12.2	11.22	HP16x101	C2
		3060.0	1937.0	135.4	154.5	173.6	60236.2	3.72	3.42	HP410x151	
31-1551	IZ	57.0	61.0	26.9	31.4	35.9	676.5	12.2	11.22	W24X68	D2
		3063.9	1550.6	131.4	153.4	175.5	92376.4	3.72	3.42	W610X101	
31-1748	IZ	57.1	68.8	25.8	30.1	34.4	605.7	12.2	11.22	W21X73	C2
		3069.3	1748.0	125.9	147.0	168.2	82718.9	3.72	3.42	W530X109	
31-1781	IZ	57.1	70.1	29.1	33.0	37.0	610.3	12.2	11.22	W21X101	D1
		3069.5	1781.0	142.2	161.4	180.5	83337.5	3.72	3.42	W530X150	
31-1875	IZ	57.1	73.8	34.3	38.0	41.7	456.8	12.2	11.22	HP16x141	D1
		3070.0	1875.4	167.3	185.5	203.7	62381.4	3.72	3.42	HP410x211	
31-1786	IZ	57.1	70.3	37.8	41.7	45.6	391.3	12.2	11.22	W12X152	D1
		3070.9	1786.0	184.4	203.5	222.7	53433.6	3.72	3.42	W310X226	
31-1848	IZ	57.4	72.8	24.2	29.9	35.5	593.4	13.32	12.27	W21X44	C3
		3086.9	1848.4	118.2	145.8	173.4	81031.0	4.06	3.74	W530X66	
31-1835	IZ	57.5	72.3	22.9	28.6	34.2	509.1	13.32	12.27	W18X35	C3
		3089.6	1835.4	111.7	139.4	167.2	69516.2	4.06	3.74	W460X52	
31-1969	IZ	57.8	77.5	30.0	33.8	37.7	548.4	12.2	11.22	W18X119	C1
		3107.4	1969.4	146.4	165.2	183.9	74887.7	3.72	3.42	W460X177	
31-1863	IZ	57.8	73.3	35.0	38.8	42.5	426.7	12.2	11.22	W14X145	D1
		3107.6	1863.0	170.9	189.2	207.6	58267.3	3.72	3.42	W360X216	
31-1920	IZ	57.8	75.6	32.5	36.1	39.8	506.8	12.2	11.22	HP18x135	D1
		3108.6	1919.8	158.6	176.4	194.2	69206.8	3.72	3.42	HP360x202	
31-1534	IZ	58.0	60.4	28.3	32.8	37.4	615.4	12.2	11.22	W21X73	D2
		3118.1	1533.6	138.0	160.3	182.5	84032.3	3.72	3.42	W530X109	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
31-1890	IZ	58.0	74.4	24.3	29.8	35.4	598.3	13.32	12.27	W21X48	C3
		3118.6	1890.4	118.7	145.7	172.6	81707.1	4.06	3.74	W530X72	
31-1913	IZ	58.3	75.3	26.9	30.9	34.8	708.6	12.2	11.22	W24X94	C1
		3136.7	1913.4	131.4	150.7	170.0	96766.8	3.72	3.42	W610X140	
31-1819	IZ	58.4	71.6	26.9	31.1	35.2	536.6	12.2	11.22	W18X86	C2
		3138.2	1819.0	131.3	151.6	172.0	73276.3	3.72	3.42	W460X128	
31-1800	IZ	58.4	70.9	27.9	32.1	36.3	488.7	12.2	11.22	W16X89	C2
		3140.8	1800.0	136.2	156.7	177.3	66741.1	3.72	3.42	W410X132	
31-1699	IZ	58.5	66.9	29.3	33.4	37.5	710.1	12.2	11.22	W24X94	D1
		3143.1	1699.0	143.0	163.1	183.2	96964.1	3.72	3.42	W610X140	
32-1634	IZ	58.7	64.3	26.3	32.4	38.4	606.3	13.32	12.27	W21X44	D3
		3154.2	1634.0	128.6	158.1	187.5	82797.8	4.06	3.74	W530X66	
32-2002	IZ	58.9	78.8	37.3	41.1	44.8	412.8	12.2	11.22	W12X170	C1
		3166.7	2002.4	182.0	200.5	218.9	56367.3	3.72	3.42	W310X253	
32-1836	IZ	58.9	72.3	23.7	29.4	35.1	528.0	13.32	12.27	W18X40	C3
		3169.2	1836.4	115.7	143.4	171.2	72099.7	4.06	3.74	W460X60	
32-1755	IZ	59.0	69.1	32.7	36.7	40.6	559.8	12.2	11.22	W18X119	D1
		3172.0	1755.0	159.5	179.0	198.4	76445.2	3.72	3.42	W460X177	
32-2078	IZ	59.1	81.8	34.3	37.9	41.6	442.1	12.2	11.22	W14X159	C1
		3177.7	2078.4	167.4	185.2	203.0	60377.0	3.72	3.42	W360X237	
32-1723	IZ	59.2	67.8	30.2	34.3	38.3	458.6	12.2	11.22	HP16x101	D2
		3181.1	1722.6	147.4	167.2	187.1	62620.5	3.72	3.42	HP410x151	
32-1676	IZ	59.3	66.0	26.4	32.3	38.2	611.9	13.32	12.27	W21X48	D3
		3189.6	1676.0	128.9	157.6	186.4	83566.7	4.06	3.74	W530X72	
32-1849	IZ	59.4	72.8	25.2	30.8	36.5	618.3	13.32	12.27	W21X50	C3
		3192.3	1849.4	122.9	150.5	178.0	84435.4	4.06	3.74	W530X74	
32-1621	IZ	59.5	63.8	24.8	30.9	37.0	527.2	13.32	12.27	W18X35	D3
		3200.0	1621.0	121.3	151.0	180.7	72000.5	4.06	3.74	W460X52	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
32-1996	IZ	59.7	78.6	28.4	32.2	36.0	641.3	12.2	11.22	W21X111	C1
		3207.8	1996.4	138.5	157.0	175.5	87573.3	3.72	3.42	W530X165	
32-1605	IZ	60.1	63.2	29.4	33.8	38.1	552.8	12.2	11.22	W18X86	D2
		3232.7	1604.6	143.6	164.9	186.2	75484.6	3.72	3.42	W460X128	
32-1861	IZ	60.2	73.3	25.9	31.5	37.1	710.4	13.32	12.27	W24X55	C3
		3239.1	1861.4	126.4	153.8	181.1	97010.2	4.06	3.74	W610X82	
33-2093	IZ	60.4	82.4	34.5	38.1	41.7	492.1	12.2	11.22	HP16x162	C1
		3246.5	2093.0	168.4	186.1	203.7	67206.8	3.72	3.42	HP410x242	
33-1837	IZ	60.4	72.3	24.7	30.4	36.0	545.7	13.32	12.27	W18X46	C3
		3247.0	1837.4	120.5	148.2	175.9	74517.7	4.06	3.74	W460X68	
33-1765	IZ	60.4	69.5	26.0	30.3	34.6	722.9	12.2	11.22	W24X76	C2
		3247.2	1765.0	126.9	147.8	168.8	98714.0	3.72	3.42	W610X113	
33-1749	IZ	60.5	68.9	27.4	31.7	36.1	648.1	12.2	11.22	W21X83	C2
		3254.1	1749.0	133.9	155.0	176.1	88510.5	3.72	3.42	W530X123	
33-1892	IZ	60.5	74.5	25.5	31.0	36.5	629.3	13.32	12.27	W21X55	C3
		3255.3	1892.4	124.3	151.2	178.2	85941.2	4.06	3.74	W530X82	
33-1586	IZ	60.6	62.4	30.6	35.0	39.4	506.7	12.2	11.22	W16X89	D2
		3256.4	1585.6	149.3	170.8	192.4	69197.7	3.72	3.42	W410X132	
33-1782	IZ	60.6	70.2	30.8	34.7	38.7	651.3	12.2	11.22	W21X111	D1
		3258.1	1782.0	150.5	169.6	188.8	88945.1	3.72	3.42	W530X165	
33-1635	IZ	60.8	64.4	27.4	33.5	39.5	632.9	13.32	12.27	W21X50	D3
		3267.7	1635.0	133.9	163.4	192.8	86430.6	4.06	3.74	W530X74	
33-1873	IZ	61.0	73.8	24.8	30.4	36.0	548.8	13.32	12.27	W18X50	C3
		3280.1	1873.4	121.2	148.4	175.6	74949.8	4.06	3.74	W460X74	
33-1551	IZ	61.1	61.0	28.5	33.0	37.5	730.8	12.2	11.22	W24X76	D2
		3282.7	1550.6	139.0	161.0	183.1	99794.5	3.72	3.42	W610X113	
33-2007	IZ	61.1	79.0	27.2	30.9	34.7	734.4	12.2	11.22	W24X104	C1
		3282.8	2007.4	132.7	151.1	169.5	100290.3	3.72	3.42	W610X155	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
33-1622	IZ	61.1	63.9	25.8	31.8	37.9	547.0	13.32	12.27	W18X40	D3
		3283.4	1622.0	125.8	155.5	185.2	74696.8	4.06	3.74	W460X60	
33-1647	IZ	61.1	64.8	28.2	34.2	40.2	720.1	13.32	12.27	W24X55	D3
		3283.4	1647.0	137.7	167.0	196.2	98337.4	4.06	3.74	W610X82	
33-1788	IZ	61.1	70.4	40.8	44.7	48.6	428.0	12.2	11.22	W12X170	D1
		3283.4	1788.0	199.1	218.2	237.3	58444.3	3.72	3.42	W310X253	
33-1864	IZ	61.2	73.4	37.3	41.1	44.8	457.9	12.2	11.22	W14X159	D1
		3291.4	1864.0	182.2	200.5	218.8	62536.0	3.72	3.42	W360X237	
33-1723	IZ	61.4	67.8	28.8	32.9	36.9	827.0	12.2	11.22	W27X94	D1
		3302.2	1723.0	140.6	160.4	180.2	112935.6	3.72	3.42	W690X140	
33-1937	IZ	61.5	76.3	26.5	30.4	34.3	827.7	12.2	11.22	W27X94	C1
		3304.8	1937.4	129.4	148.4	167.5	113024.4	3.72	3.42	W690X140	
33-1733	IZ	61.5	68.2	27.9	31.9	36.0	908.5	12.2	11.22	W30X90	D1
		3308.3	1733.0	136.1	155.9	175.6	124061.8	3.72	3.42	W760X134	
33-1802	IZ	61.6	70.9	29.7	33.9	38.1	522.3	12.2	11.22	W16X100	C2
		3309.5	1802.0	145.2	165.7	186.2	71319.6	3.72	3.42	W410X149	
33-1966	IZ	61.6	77.4	31.7	35.6	39.4	592.7	12.2	11.22	W18X130	C1
		3310.3	1966.4	155.0	173.8	192.6	80936.9	3.72	3.42	W460X193	
33-1793	IZ	61.6	70.6	29.5	33.4	37.3	741.3	12.2	11.22	W24X104	D1
		3313.8	1793.0	143.8	162.9	182.0	101235.4	3.72	3.42	W610X155	
33-1940	IZ	61.7	76.4	30.8	34.7	38.7	488.2	12.2	11.22	HP16x121	C2
		3317.6	1940.2	150.6	169.7	188.7	66661.5	3.72	3.42	HP410x181	
33-1535	IZ	61.8	60.4	30.1	34.7	39.2	661.6	12.2	11.22	W21X83	D2
		3321.7	1534.6	147.1	169.4	191.6	90350.0	3.72	3.42	W530X123	
33-2137	IZ	61.8	84.2	33.0	36.6	40.1	547.7	12.2	11.22	HP18x157	C1
		3322.7	2137.4	161.4	178.6	195.9	74793.5	3.72	3.42	HP360x234	
33-1849	IZ	61.8	72.8	26.3	32.0	37.6	651.3	13.32	12.27	W21X57	C3
		3324.7	1849.4	128.5	156.0	183.6	88935.3	4.06	3.74	W530X85	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
33-1820	IZ	61.9	71.7	28.7	32.9	37.1	575.1	12.2	11.22	W18X97	C2
		3327.5	1820.0	140.3	160.6	180.9	78528.6	3.72	3.42	W460X144	
33-1947	IZ	62.0	76.7	25.7	29.6	33.5	916.1	12.2	11.22	W30X90	C1
		3336.0	1947.4	125.5	144.5	163.4	125098.9	3.72	3.42	W760X134	
33-1678	IZ	62.1	66.1	27.7	33.6	39.4	645.3	13.32	12.27	W21X55	D3
		3337.9	1678.0	135.2	163.9	192.6	88120.6	4.06	3.74	W530X82	
33-1912	IZ	62.1	75.3	28.3	32.2	36.2	762.0	12.2	11.22	W24X103	C1
		3340.4	1912.4	138.0	157.4	176.7	104053.8	3.72	3.42	W610X153	
34-1874	IZ	62.4	73.8	25.7	31.3	36.8	564.6	13.32	12.27	W18X55	C3
		3352.3	1874.4	125.5	152.7	179.9	77103.7	4.06	3.74	W460X82	
34-1879	IZ	62.4	74.0	37.5	41.2	45.0	508.8	12.2	11.22	HP16x162	D1
		3356.7	1878.6	183.2	201.3	219.5	69487.0	3.72	3.42	HP410x242	
34-1698	IZ	62.6	66.8	30.8	34.9	39.1	767.7	12.2	11.22	W24X103	D1
		3365.3	1698.0	150.5	170.6	190.8	104830.4	3.72	3.42	W610X153	
34-1623	IZ	62.6	63.9	26.9	33.0	39.0	565.7	13.32	12.27	W18X46	D3
		3365.8	1623.0	131.2	160.9	190.6	77245.4	4.06	3.74	W460X68	
34-2081	IZ	62.8	81.9	36.7	40.4	44.0	478.5	12.2	11.22	W14X176	C1
		3376.8	2081.4	179.2	197.0	214.8	65340.6	3.72	3.42	W360X262	
34-1862	IZ	62.8	73.3	27.0	32.6	38.2	746.0	13.32	12.27	W24X62	C3
		3378.7	1862.4	131.8	159.2	186.5	101867.0	4.06	3.74	W610X92	
34-2005	IZ	62.9	79.0	40.2	44.0	47.7	452.1	12.2	11.22	W12X190	C1
		3383.0	2005.4	196.2	214.7	233.1	61739.1	3.72	3.42	W310X283	
34-1752	IZ	63.1	69.0	34.6	38.6	42.6	607.2	12.2	11.22	W18X130	D1
		3391.2	1752.0	169.2	188.7	208.2	82914.7	3.72	3.42	W460X193	
34-1892	IZ	63.1	74.5	26.6	32.1	37.6	661.8	13.32	12.27	W21X62	C3
		3391.4	1892.4	129.7	156.6	183.6	90380.1	4.06	3.74	W530X92	
34-1659	IZ	63.3	65.3	27.0	32.9	38.9	569.4	13.32	12.27	W18X50	D3
		3403.1	1659.0	131.8	160.8	189.9	77760.7	4.06	3.74	W460X74	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
34-1998	IZ	63.3	78.7	30.0	33.7	37.5	686.9	12.2	11.22	W21X122	C1
		3404.7	1998.4	146.2	164.7	183.2	93800.7	3.72	3.42	W530X182	
34-1635	IZ	63.4	64.4	28.7	34.7	40.8	667.9	13.32	12.27	W21X57	D3
		3409.7	1635.0	140.2	169.6	199.1	91208.3	4.06	3.74	W530X85	
34-1875	IZ	63.7	73.8	26.5	32.0	37.6	580.4	13.32	12.27	W18X60	C3
		3423.6	1875.4	129.2	156.4	183.5	79256.4	4.06	3.74	W460X89	
34-1923	IZ	63.8	75.7	35.8	39.5	43.1	565.1	12.2	11.22	HP18x157	D1
		3428.0	1923.0	175.0	192.7	210.5	77164.6	3.72	3.42	HP360x234	
34-1648	IZ	63.9	64.9	29.5	35.4	41.4	758.5	13.32	12.27	W24X62	D3
		3435.5	1648.0	143.9	173.1	202.3	103580.9	4.06	3.74	W610X92	
34-1751	IZ	64.0	68.9	29.1	33.5	37.8	691.4	12.2	11.22	W21X93	C2
		3439.6	1751.0	142.2	163.3	184.5	94416.2	3.72	3.42	W530X138	
34-1766	IZ	64.0	69.5	27.3	31.6	35.9	770.8	12.2	11.22	W24X84	C2
		3439.7	1766.0	133.5	154.4	175.3	105255.2	3.72	3.42	W610X125	
34-1588	IZ	64.0	62.5	32.7	37.1	41.5	542.9	12.2	11.22	W16X100	D2
		3440.0	1587.6	159.5	181.0	202.5	74131.3	3.72	3.42	W410X149	
34-1606	IZ	64.0	63.2	31.5	35.9	40.2	594.6	12.2	11.22	W18X97	D2
		3440.6	1605.6	153.8	175.1	196.4	81197.6	3.72	3.42	W460X144	
35-1726	IZ	64.4	67.9	33.7	37.7	41.8	509.6	12.2	11.22	HP16x121	D2
		3463.7	1725.8	164.4	184.2	204.0	69595.6	3.72	3.42	HP410x181	
35-1821	IZ	64.5	71.7	30.2	34.4	38.5	604.2	12.2	11.22	W18X106	C2
		3466.8	1821.0	147.5	167.8	188.1	82510.8	3.72	3.42	W460X158	
35-1784	IZ	64.6	70.2	32.6	36.5	40.4	700.7	12.2	11.22	W21X122	D1
		3473.0	1784.0	159.1	178.2	197.4	95680.7	3.72	3.42	W530X182	
35-1660	IZ	64.7	65.4	28.0	33.9	39.9	586.2	13.32	12.27	W18X55	D3
		3480.7	1660.0	136.7	165.7	194.7	80055.9	4.06	3.74	W460X82	
35-1911	IZ	64.8	75.3	27.2	32.7	38.1	769.0	13.32	12.27	W24X68	C3
		3482.9	1911.4	132.9	159.6	186.3	105010.6	4.06	3.74	W610X101	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
35-1678	IZ	64.8	66.1	28.9	34.8	40.7	680.1	13.32	12.27	W21X62	D3
		3485.1	1678.0	141.3	170.0	198.7	92878.7	4.06	3.74	W530X92	
35-1876	IZ	64.9	73.9	27.2	32.8	38.3	595.7	13.32	12.27	W18X65	C3
		3491.6	1876.4	132.9	160.1	187.2	81354.5	4.06	3.74	W460X97	
35-1552	IZ	65.0	61.1	30.0	34.5	39.0	783.3	12.2	11.22	W24X84	D2
		3495.7	1551.6	146.5	168.5	190.5	106969.7	3.72	3.42	W610X125	
35-1893	IZ	65.1	74.5	27.5	33.0	38.5	687.7	13.32	12.27	W21X68	C3
		3497.8	1893.4	134.2	161.1	188.0	93915.3	4.06	3.74	W530X101	
35-2103	IZ	65.1	82.8	37.5	41.1	44.7	537.7	12.2	11.22	HP16x183	C1
		3501.4	2102.5	183.1	200.6	218.2	73431.2	3.72	3.42	HP410x272	
35-1867	IZ	65.2	73.5	40.0	43.8	47.5	496.7	12.2	11.22	W14X176	D1
		3505.7	1867.0	195.3	213.6	231.9	67835.2	3.72	3.42	W360X262	
35-1791	IZ	65.4	70.5	44.0	47.9	51.9	469.7	12.2	11.22	W12X190	D1
		3514.9	1791.0	215.0	234.1	253.2	64147.3	3.72	3.42	W310X283	
35-1937	IZ	65.5	76.3	27.8	31.7	35.6	886.7	12.2	11.22	W27X102	C1
		3519.9	1937.4	135.8	154.9	174.0	121085.5	3.72	3.42	W690X152	
35-1537	IZ	65.6	60.5	32.1	36.6	41.2	708.8	12.2	11.22	W21X93	D2
		3526.1	1536.6	156.6	178.8	201.1	96792.3	3.72	3.42	W530X138	
35-1968	IZ	65.6	77.5	33.7	37.5	41.4	639.2	12.2	11.22	W18X143	C1
		3526.9	1968.4	164.4	183.2	202.0	87290.9	3.72	3.42	W460X213	
35-1723	IZ	65.8	67.8	30.3	34.3	38.4	891.4	12.2	11.22	W27X102	D1
		3538.8	1723.0	147.9	167.7	187.5	121733.3	3.72	3.42	W690X152	
35-1734	IZ	65.9	68.3	29.5	33.6	37.6	976.1	12.2	11.22	W30X99	D1
		3540.5	1734.0	144.2	163.9	183.6	133301.5	3.72	3.42	W760X147	
35-1790	IZ	65.9	70.5	27.1	31.3	35.5	879.5	12.2	11.22	W27X84	C2
		3542.7	1790.0	132.1	152.8	173.4	120097.0	3.72	3.42	W690X125	
36-1948	IZ	66.0	76.7	27.2	31.1	34.9	977.6	12.2	11.22	W30X99	C1
		3546.0	1948.4	132.7	151.6	170.6	133506.7	3.72	3.42	W760X147	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
36-1697	IZ	66.1	66.8	29.7	35.5	41.3	784.1	13.32	12.27	W24X68	D3
		3551.5	1697.0	144.8	173.2	201.5	107076.7	4.06	3.74	W610X101	
36-2008	IZ	66.2	79.1	29.1	32.9	36.6	802.2	12.2	11.22	W24X117	C1
		3556.7	2008.4	142.0	160.4	178.8	109547.2	3.72	3.42	W610X174	
36-1661	IZ	66.2	65.4	28.8	34.8	40.7	603.0	13.32	12.27	W18X60	D3
		3556.9	1661.0	140.8	169.8	198.8	82341.4	4.06	3.74	W460X89	
36-1877	IZ	66.4	73.9	28.2	33.8	39.4	613.1	13.32	12.27	W18X71	C3
		3570.1	1877.4	137.9	165.0	192.1	83717.8	4.06	3.74	W460X106	
36-1849	IZ	66.5	72.8	29.0	33.1	37.2	710.4	12.2	11.22	W21X101	C2
		3573.3	1849.0	141.5	161.5	181.5	97015.7	3.72	3.42	W530X150	
36-1576	IZ	66.6	62.0	29.7	34.1	38.5	888.7	12.2	11.22	W27X84	D2
		3579.9	1575.6	144.8	166.4	188.1	121357.3	3.72	3.42	W690X125	
36-1943	IZ	66.7	76.5	33.9	37.8	41.7	533.4	12.2	11.22	HP16x141	C2
		3584.5	1943.4	165.7	184.8	203.8	72836.4	3.72	3.42	HP410x211	
36-1894	IZ	66.7	74.6	28.3	33.8	39.3	707.6	13.32	12.27	W21X73	C3
		3585.7	1894.4	138.3	165.2	192.1	96633.6	4.06	3.74	W530X109	
36-1988	IZ	66.8	78.3	32.2	36.1	39.9	585.2	12.2	11.22	HP18x135	C2
		3589.5	1987.8	157.4	176.0	194.6	79913.4	3.72	3.42	HP360x202	
36-1999	IZ	66.8	78.7	31.5	35.3	39.0	728.2	12.2	11.22	W21X132	C1
		3590.0	1999.4	153.6	172.1	190.6	99442.8	3.72	3.42	W530X196	
36-1963	IZ	66.8	77.3	27.7	33.1	38.4	608.8	13.32	12.27	W18X76	C3
		3591.4	1963.4	135.4	161.4	187.3	83140.2	4.06	3.74	W460X113	
36-1607	IZ	66.8	63.3	33.2	37.5	41.9	626.3	12.2	11.22	W18X106	D2
		3593.4	1606.6	162.0	183.3	204.5	85523.4	3.72	3.42	W460X158	
36-2008	IZ	66.9	79.1	43.3	47.0	50.8	492.8	12.2	11.22	W12X210	C1
		3599.1	2008.4	211.2	229.6	248.0	67302.9	3.72	3.42	W310X313	
36-1679	IZ	67.0	66.1	30.0	35.8	41.7	707.9	13.32	12.27	W21X68	D3
		3600.2	1679.0	146.3	175.0	203.7	96665.3	4.06	3.74	W530X101	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
36-2082	IZ	67.0	82.0	39.2	42.8	46.4	518.1	12.2	11.22	W14X193	C1
		3600.6	2082.4	191.2	209.0	226.7	70751.8	3.72	3.42	W360X287	
36-1794	IZ	67.2	70.6	31.6	35.5	39.4	815.2	12.2	11.22	W24X117	D1
		3614.3	1794.0	154.3	173.3	192.4	111321.6	3.72	3.42	W610X174	
36-1754	IZ	67.5	69.1	36.8	40.8	44.8	657.3	12.2	11.22	W18X143	D1
		3626.9	1754.0	179.7	199.2	218.7	89765.6	3.72	3.42	W460X213	
36-1662	IZ	67.5	65.4	29.7	35.6	41.6	619.3	13.32	12.27	W18X65	D3
		3629.8	1662.0	145.0	174.0	202.9	84574.8	4.06	3.74	W460X97	
36-1888	IZ	67.6	74.3	40.8	44.5	48.3	558.1	12.2	11.22	HP16x183	D1
		3634.3	1888.1	199.4	217.5	235.6	76218.1	3.72	3.42	HP410x272	
37-1911	IZ	68.1	75.3	28.5	33.9	39.4	814.9	13.32	12.27	W24X76	C3
		3660.5	1911.4	139.1	165.8	192.4	111279.8	4.06	3.74	W610X113	
37-2141	IZ	68.2	84.3	36.4	39.9	43.5	614.1	12.2	11.22	HP18x181	C1
		3668.3	2140.6	177.7	194.9	212.2	83857.9	3.72	3.42	HP360x269	
37-1767	IZ	68.3	69.6	29.1	33.4	37.7	829.2	12.2	11.22	W24X94	C2
		3670.3	1767.0	142.3	163.2	184.1	113227.9	3.72	3.42	W610X140	
37-1785	IZ	68.4	70.3	34.3	38.2	42.1	745.7	12.2	11.22	W21X132	D1
		3676.3	1785.0	167.4	186.5	205.6	101832.5	3.72	3.42	W530X196	
37-1635	IZ	68.5	64.4	31.7	36.0	40.3	731.8	12.2	11.22	W21X101	D2
		3680.6	1634.6	154.9	175.8	196.7	99929.3	3.72	3.42	W530X150	
37-1680	IZ	68.7	66.1	30.9	36.8	42.7	729.4	13.32	12.27	W21X73	D3
		3696.0	1680.0	150.9	179.6	208.2	99608.5	4.06	3.74	W530X109	
37-1823	IZ	68.8	71.8	32.4	36.5	40.7	652.4	12.2	11.22	W18X119	C2
		3696.5	1823.0	158.1	178.4	198.7	89086.1	3.72	3.42	W460X177	
37-1663	IZ	69.1	65.5	30.8	36.8	42.7	637.8	13.32	12.27	W18X71	D3
		3714.4	1663.0	150.6	179.5	208.5	87102.9	4.06	3.74	W460X106	
37-1749	IZ	69.5	68.9	30.2	35.8	41.4	633.9	13.32	12.27	W18X76	D3
		3739.1	1749.0	147.2	174.7	202.3	86559.6	4.06	3.74	W460X113	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
37-1965	IZ	69.6	77.4	29.3	34.6	39.9	640.0	13.32	12.27	W18X86	C3
		3742.7	1965.4	142.9	168.8	194.7	87391.6	4.06	3.74	W460X128	
37-1773	IZ	69.6	69.8	35.2	39.1	43.1	610.2	12.2	11.22	HP18x135	D2
		3743.1	1773.4	171.7	191.0	210.3	83333.0	3.72	3.42	HP360x202	
38-1697	IZ	69.7	66.8	31.1	36.9	42.7	833.7	13.32	12.27	W24X76	D3
		3745.2	1697.0	151.7	180.1	208.5	113854.8	4.06	3.74	W610X113	
38-1794	IZ	69.7	70.6	47.5	51.4	55.3	513.1	12.2	11.22	W12X210	D1
		3746.7	1794.0	231.7	250.8	269.8	70062.9	3.72	3.42	W310X313	
38-1868	IZ	69.7	73.5	42.7	46.5	50.2	539.3	12.2	11.22	W14X193	D1
		3748.0	1868.0	208.7	227.0	245.3	73648.3	3.72	3.42	W360X287	
38-1895	IZ	69.7	74.6	29.8	35.3	40.8	746.7	13.32	12.27	W21X83	C3
		3748.9	1895.4	145.7	172.5	199.4	101970.5	4.06	3.74	W530X123	
38-1553	IZ	69.8	61.1	32.1	36.6	41.1	847.4	12.2	11.22	W24X94	D2
		3751.0	1552.6	156.5	178.5	200.5	115717.2	3.72	3.42	W610X140	
38-1729	IZ	69.8	68.1	37.2	41.2	45.3	558.7	12.2	11.22	HP16x141	D2
		3754.6	1729.0	181.4	201.2	220.9	76292.9	3.72	3.42	HP410x211	
38-1850	IZ	69.9	72.8	30.6	34.7	38.8	751.1	12.2	11.22	W21X111	C2
		3757.1	1850.0	149.5	169.5	189.4	102568.3	3.72	3.42	W530X165	
38-1970	IZ	69.9	77.6	35.9	39.8	43.6	689.4	12.2	11.22	W18X158	C1
		3758.2	1970.4	175.4	194.2	212.9	94143.5	3.72	3.42	W460X235	
38-1939	IZ	70.4	76.4	29.6	33.5	37.4	960.5	12.2	11.22	W27X114	C1
		3785.2	1939.4	144.6	163.7	182.7	131158.2	3.72	3.42	W690X170	
38-1926	IZ	70.7	75.8	39.5	43.2	46.8	636.5	12.2	11.22	HP18x181	D1
		3802.5	1926.2	193.1	210.8	228.6	86924.6	3.72	3.42	HP360x269	
38-1949	IZ	70.7	76.7	28.6	32.4	36.3	1055.5	12.2	11.22	W30X108	C1
		3803.0	1949.4	139.4	158.4	177.4	144133.2	3.72	3.42	W760X161	
38-1861	IZ	70.7	73.3	29.3	33.4	37.4	850.9	12.2	11.22	W24X104	C2
		3803.5	1861.0	143.1	163.0	182.8	116197.0	3.72	3.42	W610X155	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
38-1791	IZ	71.0	70.5	28.7	32.9	37.1	956.3	12.2	11.22	W27X94	C2
		3818.5	1791.0	139.9	160.6	181.2	130593.8	3.72	3.42	W690X140	
38-1735	IZ	71.1	68.3	31.1	35.1	39.2	1061.1	12.2	11.22	W30X108	D1
		3823.3	1735.0	151.8	171.5	191.2	144903.7	3.72	3.42	W760X161	
38-2084	IZ	71.2	82.1	41.8	45.4	49.0	558.9	12.2	11.22	W14X211	C1
		3825.4	2084.4	203.8	221.6	239.3	76317.0	3.72	3.42	W360X314	
38-1801	IZ	71.2	70.9	27.8	32.0	36.2	1051.2	12.2	11.22	W30X90	C2
		3828.1	1801.0	135.7	156.2	176.7	143552.3	3.72	3.42	W760X134	
38-1725	IZ	71.3	67.9	32.3	36.4	40.4	972.0	12.2	11.22	W27X114	D1
		3830.7	1725.0	157.7	177.5	197.3	132734.7	3.72	3.42	W690X170	
38-1912	IZ	71.3	75.3	29.7	35.2	40.6	859.1	13.32	12.27	W24X84	C3
		3833.8	1912.4	145.2	171.8	198.5	117313.7	4.06	3.74	W610X125	
38-2011	IZ	71.4	79.2	46.2	50.0	53.8	537.2	12.2	11.22	W12X230	C1
		3841.0	2011.4	225.7	244.1	262.4	73362.5	3.72	3.42	W310X342	
39-1609	IZ	71.5	63.3	35.6	40.0	44.3	678.7	12.2	11.22	W18X119	D2
		3845.6	1608.6	174.0	195.2	216.5	92677.9	3.72	3.42	W460X177	
39-2010	IZ	71.7	79.1	31.2	35.0	38.7	877.3	12.2	11.22	W24X131	C1
		3852.2	2010.4	152.4	170.8	189.2	119803.1	3.72	3.42	W610X195	
39-1936	IZ	71.8	76.2	29.5	34.8	40.2	958.4	13.32	12.27	W27X84	C3
		3860.9	1936.4	143.8	170.1	196.4	130883.9	4.06	3.74	W690X125	
39-1947	IZ	71.8	76.6	37.1	41.0	44.9	585.3	12.2	11.22	HP16x162	C2
		3861.0	1946.6	181.1	200.1	219.1	79926.1	3.72	3.42	HP410x242	
39-1587	IZ	71.9	62.5	30.5	34.9	39.3	1061.2	12.2	11.22	W30X90	D2
		3864.4	1586.6	148.7	170.2	191.8	144913.4	3.72	3.42	W760X134	
39-2001	IZ	71.9	78.8	33.8	37.5	41.3	792.4	12.2	11.22	W21X147	C1
		3864.8	2001.4	164.8	183.3	201.8	108214.9	3.72	3.42	W530X219	
39-1681	IZ	72.1	66.2	32.6	38.5	44.3	771.6	13.32	12.27	W21X83	D3
		3873.8	1681.0	159.2	187.9	216.5	105366.7	4.06	3.74	W530X123	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
39-1756	IZ	72.1	69.1	39.3	43.3	47.3	711.5	12.2	11.22	W18X158	D1
		3878.9	1756.0	192.0	211.5	230.9	97167.5	3.72	3.42	W460X235	
39-1636	IZ	72.2	64.4	33.6	37.9	42.1	776.4	12.2	11.22	W21X111	D2
		3883.8	1635.6	163.9	184.8	205.7	106028.7	3.72	3.42	W530X165	
39-1577	IZ	72.3	62.1	31.5	35.9	40.3	973.1	12.2	11.22	W27X94	D2
		3885.6	1576.6	153.6	175.3	197.0	132886.3	3.72	3.42	W690X140	
39-1766	IZ	72.3	69.5	30.6	34.9	39.2	887.0	12.2	11.22	W24X103	C2
		3888.5	1766.0	149.5	170.4	191.3	121128.3	3.72	3.42	W610X153	
39-1991	IZ	72.5	78.4	35.5	39.3	43.1	642.8	12.2	11.22	HP18x157	C2
		3899.9	1991.0	173.2	191.8	210.3	87786.7	3.72	3.42	HP360x234	
39-1751	IZ	72.6	68.9	31.9	37.5	43.1	667.4	13.32	12.27	W18X86	D3
		3903.4	1751.0	155.6	183.1	210.6	91143.9	4.06	3.74	W460X128	
39-1647	IZ	72.6	64.8	32.1	36.3	40.6	873.6	12.2	11.22	W24X104	D2
		3905.0	1646.6	156.6	177.4	198.1	119297.6	3.72	3.42	W610X155	
39-1966	IZ	72.7	77.4	31.0	36.3	41.6	675.5	13.32	12.27	W18X97	C3
		3908.7	1966.4	151.2	177.1	203.0	92245.8	4.06	3.74	W460X144	
39-1820	IZ	72.8	71.7	34.3	38.5	42.6	700.4	12.2	11.22	W18X130	C2
		3911.9	1820.0	167.5	187.8	208.1	95645.2	3.72	3.42	W460X193	
39-1897	IZ	72.8	74.7	31.4	36.9	42.4	786.5	13.32	12.27	W21X93	C3
		3912.8	1897.4	153.4	180.2	207.1	107406.3	4.06	3.74	W530X138	
39-2055	IZ	72.8	80.9	29.6	32.9	36.2	1260.8	8.35	25.36	IZ B2	B2
		3913.0	2055.0	144.4	160.5	176.7	172171.6	2.54	7.73	IZ B2	
39-1722	IZ	73.2	67.8	32.1	37.8	43.6	976.7	13.32	12.27	W27X84	D3
		3934.5	1722.0	156.8	184.8	212.7	133380.3	4.06	3.74	W690X125	
39-1698	IZ	73.2	66.8	32.5	38.3	44.1	881.7	13.32	12.27	W24X84	D3
		3934.7	1698.0	158.6	186.9	215.3	120403.1	4.06	3.74	W610X125	
39-1796	IZ	73.2	70.7	34.0	37.9	41.8	896.9	12.2	11.22	W24X131	D1
		3938.1	1796.0	165.9	184.9	203.9	122473.8	3.72	3.42	W610X195	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
40-1852	IZ	73.8	72.9	32.3	36.4	40.5	800.2	12.2	11.22	W21X122	C2
		3966.3	1852.0	157.8	177.8	197.7	109271.8	3.72	3.42	W530X182	
40-1787	IZ	74.0	70.4	36.8	40.8	44.7	815.4	12.2	11.22	W21X147	D1
		3976.9	1787.0	179.9	199.0	218.2	111353.0	3.72	3.42	W530X219	
40-1552	IZ	74.2	61.1	33.7	38.2	42.8	910.5	12.2	11.22	W24X103	D2
		3991.6	1551.6	164.7	186.7	208.7	124337.8	3.72	3.42	W610X153	
40-1870	IZ	74.2	73.6	45.6	49.4	53.1	583.2	12.2	11.22	W14X211	D1
		3991.7	1870.0	222.7	241.0	259.3	79634.7	3.72	3.42	W360X314	
40-2144	IZ	74.4	84.4	39.7	43.3	46.8	680.9	12.2	11.22	HP18x204	C1
		3997.6	2143.8	193.9	211.2	228.4	92988.1	3.72	3.42	HP460x304	
40-1797	IZ	74.5	70.7	50.8	54.7	58.6	560.5	12.2	11.22	W12X230	D1
		4007.6	1797.0	247.9	266.9	286.0	76545.9	3.72	3.42	W310X342	
40-1995	IZ	74.8	78.6	31.2	36.4	41.6	799.5	13.32	12.27	W21X101	C3
		4021.3	1995.4	152.1	177.7	203.2	109177.1	4.06	3.74	W530X150	
40-1967	IZ	75.0	77.5	32.3	37.6	42.9	702.4	13.32	12.27	W18X106	C3
		4030.4	1967.4	157.9	183.8	209.7	95924.7	4.06	3.74	W460X158	
40-1935	IZ	75.0	76.2	39.5	43.4	47.3	571.1	12.2	11.22	W14X176	C2
		4030.7	1935.0	192.8	211.9	231.0	77994.8	3.72	3.42	W360X262	
40-1913	IZ	75.2	75.3	31.4	36.9	42.3	912.9	13.32	12.27	W24X94	C3
		4041.2	1913.4	153.3	179.9	206.6	124670.0	4.06	3.74	W610X140	
41-1950	IZ	75.3	76.8	29.9	33.7	37.6	1128.8	12.2	11.22	W30X116	C1
		4046.0	1950.4	145.8	164.8	183.7	154151.2	3.72	3.42	W760X173	
41-1791	IZ	75.3	70.5	30.1	34.3	38.6	1020.2	12.2	11.22	W27X102	C2
		4049.8	1791.0	146.9	167.6	188.2	139313.8	3.72	3.42	W690X152	
41-1683	IZ	75.4	66.3	34.4	40.3	46.1	814.5	13.32	12.27	W21X93	D3
		4052.1	1683.0	167.9	196.5	225.1	111230.8	4.06	3.74	W530X138	
41-1972	IZ	75.4	77.7	38.5	42.3	46.2	755.2	12.2	11.22	W18X175	C1
		4052.3	1972.4	188.0	206.7	225.4	103130.9	3.72	3.42	W460X260	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
41-1802	IZ	75.4	70.9	29.4	33.6	37.8	1117.7	12.2	11.22	W30X99	C2
		4054.0	1802.0	143.4	164.0	184.5	152632.8	3.72	3.42	W760X147	
41-1732	IZ	75.5	68.2	40.7	44.7	48.8	614.9	12.2	11.22	HP16x162	D2
		4056.5	1732.2	198.6	218.4	238.1	83973.6	3.72	3.42	HP410x242	
41-1947	IZ	75.6	76.7	30.1	35.5	40.8	1116.8	13.32	12.27	W30X90	C3
		4067.1	1947.4	147.0	173.2	199.3	152515.0	4.06	3.74	W760X134	
41-2013	IZ	75.8	79.3	49.5	53.2	57.0	583.2	12.2	11.22	W12X252	C1
		4073.9	2013.4	241.4	259.8	278.2	79643.8	3.72	3.42	W310X375	
41-1606	IZ	75.9	63.2	37.8	42.2	46.5	730.6	12.2	11.22	W18X130	D2
		4080.5	1605.6	184.6	205.9	227.2	99767.6	3.72	3.42	W460X193	
41-1752	IZ	76.0	69.0	33.8	39.4	45.0	705.7	13.32	12.27	W18X97	D3
		4083.5	1752.0	164.9	192.4	219.8	96370.5	4.06	3.74	W460X144	
41-1777	IZ	76.0	69.9	38.8	42.7	46.7	673.1	12.2	11.22	HP18x157	D2
		4083.6	1776.6	189.4	208.6	227.8	91921.3	3.72	3.42	HP360x234	
41-1736	IZ	76.1	68.3	32.6	36.6	40.6	1141.3	12.2	11.22	W30X116	D1
		4090.8	1736.0	159.0	178.7	198.3	155860.7	3.72	3.42	W760X173	
41-2087	IZ	76.1	82.2	44.9	48.6	52.2	609.7	12.2	11.22	W14X233	C1
		4091.7	2087.4	219.3	237.1	254.8	83266.1	3.72	3.42	W360X347	
41-1862	IZ	76.2	73.3	31.4	35.4	39.5	923.9	12.2	11.22	W24X117	C2
		4096.5	1862.0	153.1	173.0	192.9	126173.2	3.72	3.42	W610X174	
41-1937	IZ	76.5	76.3	30.9	36.3	41.7	1029.5	13.32	12.27	W27X94	C3
		4110.6	1937.4	151.0	177.3	203.6	140581.9	4.06	3.74	W690X140	
41-1638	IZ	76.5	64.5	35.5	39.8	44.0	830.0	12.2	11.22	W21X122	D2
		4114.2	1637.6	173.3	194.2	215.0	113345.6	3.72	3.42	W530X182	
41-1588	IZ	76.6	62.5	32.3	36.7	41.1	1135.0	12.2	11.22	W30X99	D2
		4116.7	1587.6	157.5	179.0	200.6	154992.0	3.72	3.42	W760X147	
41-1956	IZ	76.8	77.0	40.3	44.2	48.0	633.8	12.2	11.22	HP16x183	C2
		4127.1	1956.1	196.8	215.7	234.6	86554.5	3.72	3.42	HP410x272	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
41-1733	IZ	76.8	68.2	32.8	38.5	44.2	1134.1	13.32	12.27	W30X90	D3
		4129.9	1733.0	160.4	188.1	215.9	154870.0	4.06	3.74	W760X134	
41-1822	IZ	77.0	71.7	36.4	40.5	44.7	750.5	12.2	11.22	W18X143	C2
		4141.2	1822.0	177.6	197.9	218.2	102493.6	3.72	3.42	W460X213	
41-1577	IZ	77.1	62.1	33.1	37.5	42.0	1043.5	12.2	11.22	W27X102	D2
		4142.5	1576.6	161.6	183.3	204.9	142501.0	3.72	3.42	W690X152	
42-2007	IZ	77.3	79.0	31.5	36.7	41.8	929.2	13.32	12.27	W24X104	C3
		4153.4	2007.4	153.6	178.9	204.3	126886.9	4.06	3.74	W610X155	
42-1699	IZ	77.4	66.9	34.4	40.2	46.0	940.2	13.32	12.27	W24X94	D3
		4161.7	1699.0	167.7	196.1	224.4	128388.9	4.06	3.74	W610X140	
42-1929	IZ	77.4	76.0	43.2	46.9	50.5	708.9	12.2	11.22	HP18x204	D1
		4161.8	1929.4	211.1	228.9	246.6	96807.6	3.72	3.42	HP460x304	
42-1853	IZ	77.5	73.0	33.9	38.0	42.1	844.7	12.2	11.22	W21X132	C2
		4164.3	1853.0	165.8	185.7	205.7	115351.3	3.72	3.42	W530X196	
42-1937	IZ	77.6	76.3	32.0	35.9	39.8	1072.6	12.2	11.22	W27X129	C1
		4173.1	1937.4	156.1	175.2	194.3	146475.1	3.72	3.42	W690X192	
42-1781	IZ	77.6	70.1	33.9	39.5	45.0	829.8	13.32	12.27	W21X101	D3
		4173.7	1781.0	165.7	192.8	219.8	113315.4	4.06	3.74	W530X150	
42-1996	IZ	77.9	78.6	32.7	37.9	43.1	837.1	13.32	12.27	W21X111	C3
		4187.4	1996.4	159.5	185.0	210.6	114316.5	4.06	3.74	W530X165	
42-1758	IZ	78.1	69.2	42.2	46.2	50.2	782.6	12.2	11.22	W18X175	D1
		4199.4	1758.0	206.1	225.5	245.0	106874.3	3.72	3.42	W460X260	
42-2011	IZ	78.2	79.2	33.4	37.2	41.0	967.3	12.2	11.22	W24X146	C1
		4206.9	2011.4	163.2	181.6	200.0	132095.9	3.72	3.42	W610X217	
42-1723	IZ	78.3	67.8	33.8	39.5	45.2	1053.9	13.32	12.27	W27X94	D3
		4208.3	1723.0	164.9	192.9	220.8	143922.7	4.06	3.74	W690X140	
42-1753	IZ	78.4	69.0	35.3	40.9	46.6	734.7	13.32	12.27	W18X106	D3
		4215.4	1753.0	172.4	199.9	227.3	100326.4	4.06	3.74	W460X158	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
42-1648	IZ	78.7	64.9	34.4	38.7	42.9	953.9	12.2	11.22	W24X117	D2
		4229.5	1647.6	168.0	188.7	209.5	130269.1	3.72	3.42	W610X174	
42-1969	IZ	78.7	77.5	34.3	39.6	44.9	746.9	13.32	12.27	W18X119	C3
		4232.3	1969.4	167.7	193.6	219.4	101997.5	4.06	3.74	W460X177	
42-1912	IZ	78.8	75.3	32.8	38.2	43.7	966.4	13.32	12.27	W24X103	C3
		4236.6	1912.4	160.0	186.6	213.2	131971.6	4.06	3.74	W610X153	
43-1721	IZ	79.1	67.7	43.4	47.5	51.5	602.5	12.2	11.22	W14X176	D2
		4252.1	1720.6	212.0	231.8	251.7	82278.7	3.72	3.42	W360X262	
43-1723	IZ	79.2	67.8	35.0	39.0	43.1	1093.9	12.2	11.22	W27X129	D1
		4255.9	1723.0	170.7	190.5	210.3	149381.5	3.72	3.42	W690X192	
43-1799	IZ	79.2	70.8	54.4	58.3	62.2	609.5	12.2	11.22	W12X252	D1
		4257.7	1799.0	265.6	284.5	303.5	83238.3	3.72	3.42	W310X375	
43-1994	IZ	79.3	78.5	39.1	42.9	46.7	713.9	12.2	11.22	HP18x181	C2
		4264.9	1994.2	190.7	209.3	227.8	97495.8	3.72	3.42	HP360x269	
43-1936	IZ	79.3	76.2	42.1	46.0	49.9	613.7	12.2	11.22	W14X193	C2
		4265.1	1936.0	205.7	224.8	243.9	83808.6	3.72	3.42	W360X287	
43-1948	IZ	79.5	76.7	31.6	36.9	42.3	1178.3	13.32	12.27	W30X99	C3
		4273.8	1948.4	154.2	180.3	206.5	160908.6	4.06	3.74	W760X147	
43-1950	IZ	79.5	76.8	31.0	34.9	38.8	1199.0	12.2	11.22	W30X124	C1
		4275.0	1950.4	151.4	170.4	189.3	163732.2	3.72	3.42	W760X185	
43-1873	IZ	79.6	73.7	49.1	52.9	56.6	637.7	12.2	11.22	W14X233	D1
		4279.2	1873.0	240.0	258.2	276.5	87081.2	3.72	3.42	W360X347	
43-1793	IZ	79.8	70.6	34.3	39.8	45.3	959.4	13.32	12.27	W24X104	D3
		4288.5	1793.0	167.2	194.1	220.9	131012.7	4.06	3.74	W610X155	
43-1998	IZ	79.9	78.7	36.7	40.5	44.3	897.7	12.2	11.22	W21X166	C1
		4293.9	1998.4	179.2	197.7	216.2	122591.4	3.72	3.42	W530X248	
43-1975	IZ	80.0	77.8	29.7	33.6	37.4	1315.1	12.2	11.22	W33X118	C1
		4301.4	1975.4	145.2	163.9	182.6	179581.8	3.72	3.42	W840X176	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
43-1937	IZ	80.4	76.3	32.3	37.6	43.0	1088.5	13.32	12.27	W27X102	C3
		4321.0	1937.4	157.5	183.8	210.1	148643.1	4.06	3.74	W690X152	
43-1797	IZ	80.5	70.7	36.5	40.4	44.3	995.0	12.2	11.22	W24X146	D1
		4327.4	1797.0	178.0	197.1	216.1	135880.2	3.72	3.42	W610X217	
43-1803	IZ	80.5	71.0	30.9	35.1	39.3	1201.8	12.2	11.22	W30X108	C2
		4330.1	1803.0	150.8	171.3	191.8	164111.7	3.72	3.42	W760X161	
43-1608	IZ	80.6	63.3	40.2	44.5	48.9	785.2	12.2	11.22	W18X143	D2
		4332.2	1607.6	196.1	217.3	238.6	107221.4	3.72	3.42	W460X213	
43-1639	IZ	80.6	64.5	37.3	41.6	45.9	879.0	12.2	11.22	W21X132	D2
		4333.4	1638.6	182.3	203.2	224.0	120036.3	3.72	3.42	W530X196	
43-1793	IZ	80.6	70.6	32.0	36.3	40.5	1099.8	12.2	11.22	W27X114	C2
		4334.4	1793.0	156.4	177.0	197.6	150188.6	3.72	3.42	W690X170	
43-1736	IZ	80.8	68.3	33.9	37.9	41.9	1218.1	12.2	11.22	W30X124	D1
		4343.1	1736.0	165.3	185.0	204.7	166342.2	3.72	3.42	W760X185	
43-1761	IZ	80.8	69.3	32.4	36.3	40.3	1328.0	12.2	11.22	W33X118	D1
		4343.8	1761.0	158.1	177.5	196.9	181352.7	3.72	3.42	W840X176	
44-1742	IZ	80.9	68.6	44.3	48.3	52.3	667.8	12.2	11.22	HP16x183	D2
		4348.2	1741.7	216.2	235.8	255.4	91191.2	3.72	3.42	HP410x272	
44-1782	IZ	81.0	70.2	35.6	41.2	46.7	870.7	13.32	12.27	W21X111	D3
		4355.5	1782.0	174.0	201.0	228.0	118906.2	4.06	3.74	W530X165	
44-1734	IZ	81.1	68.3	34.5	40.2	45.9	1201.6	13.32	12.27	W30X99	D3
		4358.4	1734.0	168.4	196.2	223.9	164092.0	4.06	3.74	W760X147	
44-1998	IZ	81.4	78.7	34.2	39.5	44.7	882.5	13.32	12.27	W21X122	C3
		4374.5	1998.4	167.2	192.7	218.2	120517.1	4.06	3.74	W530X182	
44-1698	IZ	81.4	66.8	35.9	41.7	47.5	997.9	13.32	12.27	W24X103	D3
		4374.8	1698.0	175.2	203.6	231.9	136273.7	4.06	3.74	W610X153	
44-1824	IZ	81.6	71.8	38.8	43.0	47.1	804.6	12.2	11.22	W18X158	C2
		4386.4	1824.0	189.5	209.7	230.0	109879.6	3.72	3.42	W460X235	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
44-2089	IZ	81.6	82.3	48.4	52.0	55.7	668.2	12.2	11.22	W14X257	C1
		4386.9	2089.4	236.4	254.1	271.8	91247.6	3.72	3.42	W360X382	
44-2017	IZ	81.6	79.4	53.3	57.1	60.8	647.7	12.2	11.22	W12X279	C1
		4389.6	2017.4	260.4	278.7	297.1	88450.8	3.72	3.42	W310X415	
44-2055	IZ	81.8	80.9	32.9	36.2	39.5	1417.5	8.33	25.3	IZ A2	A2
		4399.3	2055.0	160.4	176.6	192.7	193567.6	2.54	7.71	IZ A2	
44-1864	IZ	82.1	73.4	33.7	37.7	41.8	1004.8	12.2	11.22	W24X131	C2
		4412.1	1864.0	164.4	184.2	204.0	137216.8	3.72	3.42	W610X195	
44-2008	IZ	82.2	79.1	33.4	38.6	43.8	996.9	13.32	12.27	W24X117	C3
		4419.8	2008.4	162.9	188.2	213.6	136130.5	4.06	3.74	W610X174	
44-1966	IZ	82.2	77.4	36.1	41.4	46.7	791.5	13.32	12.27	W18X130	C3
		4420.8	1966.4	176.3	202.2	228.1	108088.1	4.06	3.74	W460X193	
44-1589	IZ	82.3	62.5	34.0	38.4	42.8	1227.7	12.2	11.22	W30X108	D2
		4423.5	1588.6	165.8	187.3	208.8	167649.8	3.72	3.42	W760X161	
44-1755	IZ	82.5	69.1	37.6	43.2	48.8	782.6	13.32	12.27	W18X119	D3
		4434.3	1755.0	183.4	210.8	238.3	106867.2	4.06	3.74	W460X177	
44-1723	IZ	82.6	67.8	35.3	41.0	46.7	1118.3	13.32	12.27	W27X102	D3
		4439.5	1723.0	172.2	200.2	228.1	152720.4	4.06	3.74	W690X152	
44-1784	IZ	82.7	70.2	40.2	44.1	48.0	929.3	12.2	11.22	W21X166	D1
		4444.8	1784.0	196.1	215.2	234.4	126900.1	3.72	3.42	W530X248	
45-1855	IZ	82.9	73.0	36.4	40.5	44.6	913.9	12.2	11.22	W21X147	C2
		4457.1	1855.0	177.8	197.8	217.7	124798.5	3.72	3.42	W530X219	
45-1579	IZ	82.9	62.1	35.3	39.7	44.2	1131.4	12.2	11.22	W27X114	D2
		4458.8	1578.6	172.3	194.0	215.6	154496.2	3.72	3.42	W690X170	
45-1780	IZ	83.4	70.1	42.8	46.7	50.7	750.3	12.2	11.22	HP18x181	D2
		4482.0	1779.8	209.0	228.2	247.4	102457.8	3.72	3.42	HP360x269	
45-1951	IZ	83.4	76.8	32.3	36.2	40.1	1264.8	12.2	11.22	W30X132	C1
		4486.1	1951.4	157.8	176.7	195.7	172713.7	3.72	3.42	W760X196	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
45-1938	IZ	83.7	76.3	44.9	48.8	52.7	657.5	12.2	11.22	W14X211	C2
		4500.3	1938.0	219.2	238.3	257.4	89780.8	3.72	3.42	W360X314	
45-1722	IZ	83.8	67.8	46.4	50.4	54.5	648.6	12.2	11.22	W14X193	D2
		4507.8	1721.6	226.4	246.3	266.1	88577.7	3.72	3.42	W360X287	
45-1949	IZ	84.2	76.7	33.0	38.3	43.7	1256.0	13.32	12.27	W30X108	C3
		4525.6	1949.4	161.0	187.1	213.2	171521.2	4.06	3.74	W760X161	
45-2038	IZ	84.2	80.3	33.1	36.8	40.5	1152.0	12.2	11.22	W27X146	C1
		4527.2	2038.4	161.5	179.6	197.7	157319.7	3.72	3.42	W690X217	
46-2012	IZ	84.6	79.2	35.9	39.7	43.4	1057.8	12.2	11.22	W24X162	C1
		4549.7	2012.4	175.3	193.6	212.0	144451.5	3.72	3.42	W610X241	
46-1999	IZ	84.7	78.7	35.8	41.0	46.2	923.7	13.32	12.27	W21X132	C3
		4554.0	1999.4	174.6	200.1	225.6	126145.9	4.06	3.74	W530X196	
46-1784	IZ	84.8	70.2	37.4	42.9	48.5	919.8	13.32	12.27	W21X122	D3
		4559.3	1784.0	182.6	209.6	236.6	125608.2	4.06	3.74	W530X182	
46-1737	IZ	85.1	68.4	35.3	39.3	43.4	1290.0	12.2	11.22	W30X132	D1
		4575.5	1737.0	172.4	192.1	211.8	176157.9	3.72	3.42	W760X196	
46-1650	IZ	85.2	64.9	37.0	41.2	45.5	1042.7	12.2	11.22	W24X131	D2
		4578.4	1649.6	180.6	201.3	222.0	142388.1	3.72	3.42	W610X195	
46-1939	IZ	85.2	76.4	34.0	39.4	44.8	1162.0	13.32	12.27	W27X114	C3
		4579.7	1939.4	166.2	192.5	218.8	158687.3	4.06	3.74	W690X170	
46-1794	IZ	85.2	70.6	36.4	41.9	47.4	1033.1	13.32	12.27	W24X117	D3
		4580.6	1794.0	177.7	204.5	231.3	141082.3	4.06	3.74	W610X174	
46-2001	IZ	85.3	78.8	39.1	42.9	46.7	968.7	12.2	11.22	W21X182	C1
		4585.4	2001.4	191.1	209.6	228.1	132289.6	3.72	3.42	W530X272	
46-1804	IZ	85.4	71.0	32.3	36.5	40.7	1281.0	12.2	11.22	W30X116	C2
		4591.4	1804.0	157.6	178.1	198.6	174931.5	3.72	3.42	W760X173	
46-1803	IZ	85.5	71.0	58.7	62.6	66.5	678.4	12.2	11.22	W12X279	D1
		4597.7	1803.0	286.7	305.7	324.6	92642.9	3.72	3.42	W310X415	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
46-1875	IZ	85.5	73.8	53.0	56.8	60.5	700.4	12.2	11.22	W14X257	D1
		4598.2	1875.0	259.0	277.2	295.4	95642.7	3.72	3.42	W360X382	
46-1610	IZ	85.6	63.4	42.9	47.3	51.6	844.1	12.2	11.22	W18X158	D2
		4601.8	1609.6	209.5	230.7	251.9	115275.0	3.72	3.42	W460X235	
46-1997	IZ	85.8	78.6	42.6	46.4	50.2	785.5	12.2	11.22	HP18x204	C2
		4611.7	1997.4	208.2	226.7	245.2	107273.6	3.72	3.42	HP460x304	
46-1968	IZ	86.0	77.5	38.0	43.3	48.6	837.8	13.32	12.27	W18X143	C3
		4622.8	1968.4	185.7	211.6	237.5	114414.4	4.06	3.74	W460X213	
46-1735	IZ	86.2	68.3	36.0	41.7	47.4	1286.5	13.32	12.27	W30X108	D3
		4635.3	1735.0	176.0	203.8	231.5	175676.4	4.06	3.74	W760X161	
46-1752	IZ	86.3	69.0	39.6	45.2	50.8	830.3	13.32	12.27	W18X130	D3
		4637.6	1752.0	193.1	220.6	248.1	113388.8	4.06	3.74	W460X193	
47-1824	IZ	86.6	71.8	36.0	39.9	43.7	1184.5	12.2	11.22	W27X146	D1
		4654.8	1824.0	175.8	194.6	213.3	161753.6	3.72	3.42	W690X217	
47-1641	IZ	86.6	64.6	40.1	44.4	48.7	954.8	12.2	11.22	W21X147	D2
		4656.6	1640.6	196.0	216.8	237.6	130384.2	3.72	3.42	W530X219	
47-1975	IZ	87.1	77.8	31.6	35.4	39.3	1440.9	12.2	11.22	W33X130	C1
		4684.8	1975.4	154.3	173.0	191.7	196762.9	3.72	3.42	W840X193	
47-1826	IZ	87.4	71.9	41.6	45.7	49.9	875.6	12.2	11.22	W18X175	C2
		4698.2	1826.0	203.0	223.3	243.5	119570.3	3.72	3.42	W460X260	
47-1798	IZ	87.5	70.8	39.2	43.1	47.0	1093.4	12.2	11.22	W24X162	D1
		4702.9	1798.0	191.5	210.5	229.5	149316.5	3.72	3.42	W610X241	
47-2010	IZ	87.5	79.1	35.5	40.7	45.9	1071.8	13.32	12.27	W24X131	C3
		4706.1	2010.4	173.3	198.6	223.9	146360.0	4.06	3.74	W610X195	
47-1590	IZ	87.7	62.6	35.6	40.0	44.4	1315.2	12.2	11.22	W30X116	D2
		4714.0	1589.6	173.6	195.1	216.6	179601.6	3.72	3.42	W760X173	
47-2019	IZ	87.7	79.5	57.3	61.0	64.8	716.4	12.2	11.22	W12X305	C1
		4714.7	2019.4	279.6	297.9	316.2	97830.2	3.72	3.42	W310X454	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
47-1725	IZ	87.9	67.9	37.3	43.0	48.7	1198.6	13.32	12.27	W27X114	D3
		4724.0	1725.0	182.0	209.9	237.9	163685.8	4.06	3.74	W690X170	
47-2092	IZ	88.1	82.4	52.1	55.7	59.4	736.7	12.2	11.22	W14X283	C1
		4734.5	2092.4	254.5	272.1	289.8	100608.8	3.72	3.42	W360X421	
48-1791	IZ	88.4	70.5	34.6	38.8	43.0	1221.3	12.2	11.22	W27X129	C2
		4751.5	1791.0	168.9	189.5	210.1	166778.8	3.72	3.42	W690X192	
48-1785	IZ	88.5	70.3	39.1	44.6	50.1	964.7	13.32	12.27	W21X132	D3
		4756.1	1785.0	190.9	217.8	244.8	131743.3	4.06	3.74	W530X196	
48-2141	IZ	88.5	84.3	40.4	45.3	50.2	796.7	13.32	12.27	HP18x181	C3
		4759.4	2140.6	197.3	221.1	244.9	108799.5	4.06	3.74	HP360x269	
48-1787	IZ	88.6	70.4	42.9	46.8	50.7	1006.4	12.2	11.22	W21X182	D1
		4763.8	1787.0	209.3	228.5	247.6	137434.7	3.72	3.42	W530X272	
48-1950	IZ	88.6	76.8	34.3	39.6	45.0	1329.3	13.32	12.27	W30X116	C3
		4764.4	1950.4	167.3	193.4	219.6	181525.1	4.06	3.74	W760X173	
48-1724	IZ	88.6	67.9	49.5	53.6	57.6	696.1	12.2	11.22	W14X211	D2
		4764.7	1723.6	241.6	261.5	281.3	95055.2	3.72	3.42	W360X314	
48-1761	IZ	88.7	69.3	34.5	38.4	42.4	1466.2	12.2	11.22	W33X130	D1
		4767.2	1761.0	168.3	187.7	207.1	200220.9	3.72	3.42	W840X193	
48-1941	IZ	88.9	76.4	48.3	52.2	56.1	712.0	12.2	11.22	W14X233	C2
		4778.0	1941.0	235.9	254.9	274.0	97233.2	3.72	3.42	W360X347	
48-1865	IZ	89.1	73.4	36.1	40.1	44.2	1101.8	12.2	11.22	W24X146	C2
		4791.9	1865.0	176.1	195.9	215.7	150465.3	3.72	3.42	W610X217	
48-1867	IZ	89.3	73.5	53.3	57.4	61.4	687.5	12.2	11.22	W12X252	C2
		4802.1	1867.0	260.4	280.2	300.0	93880.4	3.72	3.42	W310X375	
48-2001	IZ	89.6	78.8	38.1	43.3	48.5	987.8	13.32	12.27	W21X147	C3
		4817.5	2001.4	185.8	211.3	236.7	134891.2	4.06	3.74	W530X219	
48-1804	IZ	90.0	71.0	33.5	37.7	41.9	1356.9	12.2	11.22	W30X124	C2
		4837.9	1804.0	163.7	184.2	204.7	185290.0	3.72	3.42	W760X185	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
48-1970	IZ	90.0	77.6	40.3	45.6	50.9	887.8	13.32	12.27	W18X158	C3
		4839.9	1970.4	196.7	222.5	248.4	121239.5	4.06	3.74	W460X235	
48-1829	IZ	90.0	72.0	32.1	36.2	40.4	1480.0	12.2	11.22	W33X118	C2
		4841.0	1829.0	156.8	177.0	197.2	202113.6	3.72	3.42	W840X176	
49-1754	IZ	90.3	69.1	41.7	47.3	53.0	880.2	13.32	12.27	W18X143	D3
		4856.8	1754.0	203.6	231.1	258.5	120204.9	4.06	3.74	W460X213	
49-1783	IZ	90.5	70.2	46.8	50.7	54.6	828.4	12.2	11.22	HP18x204	D2
		4863.3	1783.0	228.5	247.6	266.8	113124.7	3.72	3.42	HP460x304	
49-2010	IZ	90.5	79.1	37.9	41.7	45.5	1142.1	12.2	11.22	W24X176	C1
		4866.4	2010.4	185.2	203.6	222.0	155967.5	3.72	3.42	W610X262	
49-2039	IZ	90.7	80.3	35.3	39.1	42.8	1251.8	12.2	11.22	W27X161	C1
		4877.1	2039.4	172.5	190.7	208.8	170943.9	3.72	3.42	W690X240	
49-1796	IZ	91.0	70.7	38.8	44.3	49.7	1114.5	13.32	12.27	W24X131	D3
		4893.9	1796.0	189.3	216.1	242.9	152201.4	4.06	3.74	W610X195	
49-1736	IZ	91.1	68.3	37.5	43.2	48.9	1366.6	13.32	12.27	W30X116	D3
		4898.0	1736.0	183.1	210.9	238.6	186615.7	4.06	3.74	W760X173	
49-1852	IZ	91.4	72.9	39.6	43.7	47.8	1027.7	12.2	11.22	W21X166	C2
		4915.5	1852.0	193.4	213.4	233.3	140338.4	3.72	3.42	W530X248	
49-1577	IZ	91.5	62.1	38.2	42.6	47.1	1264.8	12.2	11.22	W27X129	D2
		4920.7	1576.6	186.5	208.2	229.8	172716.6	3.72	3.42	W690X192	
49-2055	IZ	92.0	80.9	31.1	34.4	37.8	1955.1	8.35	26.67	IZ B3	B3
		4944.1	2055.0	152.0	168.2	184.3	266983.3	2.54	8.13	IZ B3	
49-1612	IZ	92.0	63.4	46.0	50.4	54.7	921.5	12.2	11.22	W18X175	D2
		4944.6	1611.6	224.8	246.0	267.2	125841.1	3.72	3.42	W460X260	
50-1805	IZ	92.0	71.1	63.1	67.0	70.9	751.8	12.2	11.22	W12X305	D1
		4947.6	1805.0	308.2	327.1	346.0	102663.3	3.72	3.42	W310X454	
50-2002	IZ	92.0	78.8	42.0	45.8	49.6	1059.9	12.2	11.22	W21X201	C1
		4948.1	2002.4	205.1	223.6	242.1	144733.3	3.72	3.42	W530X300	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
50-1975	IZ	92.0	77.8	34.1	39.4	44.6	1513.0	13.32	12.27	W33X118	C3
		4948.7	1975.4	166.4	192.2	218.0	206609.2	4.06	3.74	W840X176	
50-1937	IZ	92.2	76.3	36.4	41.8	47.2	1274.4	13.32	12.27	W27X129	C3
		4958.2	1937.4	177.8	204.1	230.3	174032.6	4.06	3.74	W690X192	
50-1615	IZ	92.2	63.6	35.3	39.6	44.0	1516.1	12.2	11.22	W33X118	D2
		4959.0	1614.6	172.4	193.5	214.7	207037.4	3.72	3.42	W840X176	
50-1949	IZ	92.3	76.7	34.8	38.7	42.6	1414.7	12.2	11.22	W30X148	C1
		4959.9	1949.4	170.0	189.0	208.0	193187.3	3.72	3.42	W760X220	
50-1878	IZ	92.5	73.9	57.2	60.9	64.6	774.2	12.2	11.22	W14X283	D1
		4975.1	1878.0	279.0	297.2	315.4	105721.7	3.72	3.42	W360X421	
50-1987	IZ	92.7	78.2	32.1	35.9	39.8	1647.0	12.2	11.22	W36X135	C1
		4981.5	1987.4	156.9	175.5	194.1	224916.6	3.72	3.42	W920X201	
50-1590	IZ	92.8	62.6	37.0	41.4	45.8	1399.0	12.2	11.22	W30X124	D2
		4988.2	1589.6	180.5	202.0	223.5	191048.4	3.72	3.42	W760X185	
50-1950	IZ	92.8	76.8	35.4	40.8	46.1	1399.4	13.32	12.27	W30X124	C3
		4989.7	1950.4	172.9	199.1	225.2	191106.0	4.06	3.74	W760X185	
50-1651	IZ	93.0	65.0	39.7	43.9	48.2	1149.5	12.2	11.22	W24X146	D2
		4999.1	1650.6	193.8	214.5	235.2	156971.5	3.72	3.42	W610X217	
50-1926	IZ	93.3	75.8	44.0	49.1	54.2	839.5	13.32	12.27	HP18x181	D3
		5015.0	1926.2	214.9	239.9	264.9	114642.7	4.06	3.74	HP360x269	
50-1976	IZ	93.6	77.8	33.3	37.1	41.0	1559.2	12.2	11.22	W33X141	C1
		5033.6	1976.4	162.6	181.3	200.0	212922.7	3.72	3.42	W840X210	
50-1825	IZ	93.7	71.8	38.5	42.4	46.2	1293.4	12.2	11.22	W27X161	D1
		5039.2	1825.0	188.2	206.9	225.7	176624.9	3.72	3.42	W690X240	
50-1787	IZ	93.8	70.4	41.7	47.2	52.7	1034.2	13.32	12.27	W21X147	D3
		5043.9	1787.0	203.4	230.3	257.3	141230.3	4.06	3.74	W530X219	
51-1796	IZ	93.9	70.7	41.5	45.4	49.3	1185.3	12.2	11.22	W24X176	D1
		5050.4	1796.0	202.6	221.6	240.7	161865.9	3.72	3.42	W610X262	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
51-2011	IZ	94.0	79.2	37.7	42.9	48.1	1161.7	13.32	12.27	W24X146	C3
		5052.2	2011.4	184.1	209.4	234.8	158639.6	4.06	3.74	W610X217	
51-1805	IZ	94.2	71.1	34.9	39.1	43.3	1427.9	12.2	11.22	W30X132	C2
		5064.6	1805.0	170.6	191.1	211.6	194988.0	3.72	3.42	W760X196	
51-1727	IZ	94.2	68.0	53.3	57.4	61.4	755.0	12.2	11.22	W14X233	D2
		5066.7	1726.6	260.3	280.1	299.9	103106.3	3.72	3.42	W360X347	
51-2144	IZ	94.3	84.4	43.7	48.6	53.5	863.3	13.32	12.27	HP18x204	C3
		5068.3	2143.8	213.5	237.3	261.0	117892.7	4.06	3.74	HP460x304	
51-1773	IZ	94.3	69.8	35.1	39.0	42.9	1676.2	12.2	11.22	W36X135	D1
		5069.8	1773.0	171.2	190.4	209.7	228901.8	3.72	3.42	W920X201	
51-1761	IZ	94.3	69.3	37.3	42.9	48.5	1550.0	13.32	12.27	W33X118	D3
		5070.0	1761.0	181.9	209.2	236.6	211671.0	4.06	3.74	W840X176	
51-2095	IZ	94.5	82.5	56.1	59.7	63.3	809.0	12.2	11.22	W14X311	C1
		5079.4	2095.4	274.0	291.6	309.2	110476.2	3.72	3.42	W360X463	
51-2023	IZ	94.6	79.7	61.8	65.6	69.3	795.1	12.2	11.22	W12X336	C1
		5085.9	2023.4	301.9	320.2	338.5	108583.4	3.72	3.42	W310X500	
51-1943	IZ	94.6	76.5	52.1	56.0	59.9	774.8	12.2	11.22	W14X257	C2
		5086.6	1943.0	254.2	273.3	292.3	105801.8	3.72	3.42	W360X382	
51-1756	IZ	94.7	69.1	44.2	49.8	55.5	934.2	13.32	12.27	W18X158	D3
		5092.7	1756.0	215.9	243.3	270.8	127572.2	4.06	3.74	W460X235	
51-1735	IZ	94.8	68.3	38.1	42.2	46.2	1453.7	12.2	11.22	W30X148	D1
		5096.6	1735.0	186.2	205.9	225.6	198513.2	3.72	3.42	W760X220	
51-1653	IZ	94.8	65.1	59.2	63.4	67.7	729.7	12.2	11.22	W12X252	D2
		5096.7	1652.6	289.1	309.7	330.4	99640.6	3.72	3.42	W310X375	
51-1892	IZ	94.9	74.5	35.6	39.6	43.6	1298.9	12.2	11.22	W27X146	C2
		5104.4	1892.0	174.0	193.5	213.0	177378.7	3.72	3.42	W690X217	
51-1972	IZ	95.2	77.7	42.9	48.1	53.4	953.4	13.32	12.27	W18X175	C3
		5115.9	1972.4	209.2	235.1	260.9	130199.4	4.06	3.74	W460X260	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
51-1871	IZ	95.4	73.7	57.5	61.6	65.6	756.8	12.2	11.22	W12X279	C2
		5128.8	1871.0	280.8	300.6	320.3	103346.1	3.72	3.42	W310X415	
51-1723	IZ	95.6	67.8	39.9	45.7	51.4	1320.8	13.32	12.27	W27X129	D3
		5138.7	1723.0	195.0	222.9	250.9	180368.6	4.06	3.74	W690X192	
52-1736	IZ	95.7	68.3	38.8	44.5	50.2	1443.3	13.32	12.27	W30X124	D3
		5146.1	1736.0	189.5	217.2	244.9	197097.2	4.06	3.74	W760X185	
52-1762	IZ	95.8	69.4	36.4	40.3	44.3	1595.7	12.2	11.22	W33X141	D1
		5151.4	1762.0	177.6	197.0	216.3	217903.8	3.72	3.42	W840X210	
52-1866	IZ	95.9	73.5	38.7	42.8	46.8	1199.3	12.2	11.22	W24X162	C2
		5158.4	1866.0	189.0	208.8	228.6	163780.4	3.72	3.42	W610X241	
52-1788	IZ	96.0	70.4	46.1	50.0	53.9	1105.4	12.2	11.22	W21X201	D1
		5160.6	1788.0	225.0	244.1	263.3	150948.8	3.72	3.42	W530X300	
52-1638	IZ	96.0	64.5	43.7	48.0	52.3	1079.1	12.2	11.22	W21X166	D2
		5161.3	1637.6	213.6	234.4	255.3	147356.0	3.72	3.42	W530X248	
52-2012	IZ	96.4	79.2	40.3	44.1	47.8	1227.9	12.2	11.22	W24X192	C1
		5183.1	2012.4	196.7	215.1	233.4	167674.3	3.72	3.42	W610X285	
52-1951	IZ	96.7	76.8	36.7	42.1	47.4	1465.1	13.32	12.27	W30X132	C3
		5196.7	1951.4	179.3	205.4	231.5	200073.5	4.06	3.74	W760X196	
52-1855	IZ	97.2	73.0	42.2	46.3	50.4	1104.1	12.2	11.22	W21X182	C2
		5226.1	1855.0	206.2	226.1	246.1	150773.3	3.72	3.42	W530X272	
52-1998	IZ	97.3	78.7	41.0	46.2	51.5	1093.4	13.32	12.27	W21X166	C3
		5229.7	1998.4	200.2	225.7	251.2	149307.8	4.06	3.74	W530X248	
52-1591	IZ	97.5	62.6	38.6	43.0	47.4	1477.4	12.2	11.22	W30X132	D2
		5240.3	1590.6	188.3	209.8	231.3	201752.0	3.72	3.42	W760X196	
53-2041	IZ	97.7	80.4	37.8	41.5	45.2	1357.4	12.2	11.22	W27X178	C1
		5251.3	2041.4	184.7	202.8	220.9	185370.1	3.72	3.42	W690X265	
53-1829	IZ	97.7	72.0	34.1	38.3	42.4	1615.9	12.2	11.22	W33X130	C2
		5254.0	1829.0	166.6	186.9	207.1	220670.0	3.72	3.42	W840X193	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
53-1797	IZ	98.1	70.7	41.2	46.7	52.2	1212.6	13.32	12.27	W24X146	D3
		5273.6	1797.0	201.4	228.2	255.0	165591.2	4.06	3.74	W610X217	
53-2038	IZ	98.2	80.3	37.3	42.4	47.5	1343.8	13.32	12.27	W27X146	C3
		5280.9	2038.4	182.0	207.0	232.0	183511.8	4.06	3.74	W690X217	
53-1678	IZ	98.9	66.0	39.2	43.3	47.5	1353.0	12.2	11.22	W27X146	D2
		5316.9	1677.6	191.2	211.5	231.9	184763.4	3.72	3.42	W690X217	
53-1975	IZ	99.1	77.8	36.0	41.2	46.5	1638.8	13.32	12.27	W33X130	C3
		5328.3	1975.4	175.5	201.3	227.1	223790.4	4.06	3.74	W840X193	
54-1881	IZ	99.5	74.1	61.6	65.3	69.0	851.8	12.2	11.22	W14X311	D1
		5348.2	1881.0	300.7	318.9	337.0	116322.7	3.72	3.42	W360X463	
54-1809	IZ	99.5	71.2	68.2	72.1	76.0	836.2	12.2	11.22	W12X336	D1
		5348.4	1809.0	333.1	352.0	370.9	114187.7	3.72	3.42	W310X500	
54-1929	IZ	99.5	76.0	47.7	52.8	57.9	911.5	13.32	12.27	HP18x204	D3
		5351.5	1929.4	232.9	257.8	282.8	124480.1	4.06	3.74	HP460x304	
54-1977	IZ	99.9	77.9	35.0	38.8	42.6	1673.0	12.2	11.22	W33X152	C1
		5369.4	1977.4	170.8	189.5	208.2	228467.8	3.72	3.42	W840X226	
54-1737	IZ	100.0	68.4	40.3	45.9	51.6	1515.1	13.32	12.27	W30X132	D3
		5373.9	1737.0	196.6	224.3	252.0	206895.2	4.06	3.74	W760X196	
54-2012	IZ	100.2	79.2	40.2	45.3	50.5	1252.1	13.32	12.27	W24X162	C3
		5385.3	2012.4	196.1	221.4	246.7	170982.0	4.06	3.74	W610X241	
54-1758	IZ	100.3	69.2	47.1	52.7	58.3	1005.0	13.32	12.27	W18X175	D3
		5392.7	1758.0	230.0	257.4	284.7	137244.4	4.06	3.74	W460X260	
54-1798	IZ	100.4	70.8	44.1	48.0	51.9	1278.6	12.2	11.22	W24X192	D1
		5397.5	1798.0	215.5	234.5	253.5	174607.6	3.72	3.42	W610X285	
54-1729	IZ	100.5	68.1	57.5	61.6	65.6	822.9	12.2	11.22	W14X257	D2
		5402.6	1728.6	280.9	300.7	320.4	112374.4	3.72	3.42	W360X382	
54-1652	IZ	100.5	65.0	42.7	46.9	51.2	1256.5	12.2	11.22	W24X162	D2
		5404.3	1651.6	208.4	229.1	249.8	171586.1	3.72	3.42	W610X241	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
54-2055	IZ	100.7	80.9	32.8	36.1	39.4	2141.0	8.33	26.61	IZ A3	A3
		5414.3	2055.0	160.1	176.3	192.4	292370.2	2.54	8.11	IZ A3	
54-1615	IZ	100.8	63.6	37.6	41.9	46.3	1666.8	12.2	11.22	W33X130	D2
		5419.4	1614.6	183.6	204.7	225.9	227616.5	3.72	3.42	W840X193	
55-1827	IZ	101.4	71.9	41.3	45.2	49.0	1409.0	12.2	11.22	W27X178	D1
		5450.8	1827.0	201.8	220.5	239.2	192412.0	3.72	3.42	W690X265	
55-1657	IZ	101.4	65.2	63.9	68.1	72.4	804.3	12.2	11.22	W12X279	D2
		5451.0	1656.6	312.1	332.7	353.3	109836.7	3.72	3.42	W310X415	
55-1946	IZ	101.4	76.6	56.0	59.9	63.8	848.3	12.2	11.22	W14X283	C2
		5451.5	1946.0	273.6	292.6	311.6	115844.8	3.72	3.42	W360X421	
55-1873	IZ	101.7	73.7	61.7	65.8	69.8	830.7	12.2	11.22	W12X305	C2
		5467.1	1873.0	301.5	321.2	340.9	113442.7	3.72	3.42	W310X454	
55-1893	IZ	101.9	74.5	38.1	42.1	46.1	1406.3	12.2	11.22	W27X161	C2
		5479.2	1893.0	185.9	205.4	224.9	192045.9	3.72	3.42	W690X240	
55-2099	IZ	101.9	82.7	60.5	64.1	67.7	895.0	12.2	11.22	W14X342	C1
		5480.8	2099.4	295.5	313.1	330.7	122222.0	3.72	3.42	W360X509	
55-1761	IZ	102.1	69.3	39.4	45.0	50.6	1688.2	13.32	12.27	W33X130	D3
		5489.0	1761.0	192.1	219.5	246.8	230539.3	4.06	3.74	W840X193	
55-1784	IZ	102.2	70.2	45.0	50.5	56.0	1148.4	13.32	12.27	W21X166	D3
		5493.1	1784.0	219.6	246.6	273.5	156827.6	4.06	3.74	W530X248	
55-1824	IZ	102.2	71.8	40.7	46.1	51.5	1398.8	13.32	12.27	W27X146	D3
		5497.1	1824.0	198.8	225.2	251.6	191024.8	4.06	3.74	W690X217	
55-1864	IZ	102.3	73.4	40.9	45.0	49.0	1290.4	12.2	11.22	W24X176	C2
		5498.3	1864.0	199.7	219.6	239.4	176221.6	3.72	3.42	W610X262	
55-1641	IZ	102.4	64.6	46.7	51.0	55.2	1162.8	12.2	11.22	W21X182	D2
		5504.1	1640.6	228.0	248.9	269.7	158793.3	3.72	3.42	W530X272	
55-2001	IZ	102.5	78.8	43.4	48.7	53.9	1164.1	13.32	12.27	W21X182	C3
		5510.1	2001.4	212.1	237.5	263.0	158966.0	4.06	3.74	W530X272	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
55-2013	IZ	102.5	79.3	42.6	46.3	50.1	1317.7	12.2	11.22	W24X207	C1
		5511.4	2013.4	207.9	226.3	244.6	179947.6	3.72	3.42	W610X307	
55-1987	IZ	102.7	78.2	34.5	38.3	42.1	1840.9	12.2	11.22	W36X150	C1
		5519.1	1987.4	168.4	187.0	205.6	251396.6	3.72	3.42	W920X223	
55-2064	IZ	102.7	81.3	36.6	40.3	44.0	1562.7	12.2	11.22	W30X173	C1
		5521.5	2064.4	178.8	196.7	214.6	213405.1	3.72	3.42	W760X257	
55-1763	IZ	102.7	69.4	38.3	42.2	46.2	1720.6	12.2	11.22	W33X152	D1
		5521.9	1763.0	186.8	206.2	225.6	234957.1	3.72	3.42	W840X226	
56-1841	IZ	103.4	72.5	34.7	38.8	42.9	1837.4	12.2	11.22	W36X135	C2
		5557.2	1841.0	169.4	189.5	209.6	250906.7	3.72	3.42	W920X201	
56-1803	IZ	103.7	71.0	37.7	41.9	46.1	1590.1	12.2	11.22	W30X148	C2
		5575.1	1803.0	183.8	204.4	224.9	217148.9	3.72	3.42	W760X220	
56-1987	IZ	103.7	78.2	36.5	41.7	47.0	1843.8	13.32	12.27	W36X135	C3
		5576.5	1987.4	178.0	203.7	229.3	251780.8	4.06	3.74	W920X201	
56-1856	IZ	104.4	73.1	45.3	49.4	53.5	1202.3	12.2	11.22	W21X201	C2
		5613.3	1856.0	221.3	241.2	261.2	164188.6	3.72	3.42	W530X300	
56-2039	IZ	104.6	80.3	39.6	44.7	49.8	1443.5	13.32	12.27	W27X161	C3
		5624.1	2039.4	193.1	218.1	243.1	197123.2	4.06	3.74	W690X240	
56-1830	IZ	104.7	72.0	36.0	40.1	44.2	1743.6	12.2	11.22	W33X141	C2
		5629.1	1830.0	175.6	195.8	216.0	238109.5	3.72	3.42	W840X210	
56-1798	IZ	104.9	70.8	44.0	49.5	55.0	1310.9	13.32	12.27	W24X162	D3
		5638.1	1798.0	214.8	241.6	268.4	179011.0	4.06	3.74	W610X241	
57-1983	IZ	105.2	78.1	34.4	38.2	42.0	2008.7	12.2	11.22	W40X149	C1
		5655.8	1983.4	167.9	186.6	205.2	274305.8	3.72	3.42	W1000X222	
57-1773	IZ	105.3	69.8	37.7	41.6	45.6	1888.9	12.2	11.22	W36X150	D1
		5662.9	1773.0	184.0	203.3	222.5	257943.7	3.72	3.42	W920X223	
57-1949	IZ	105.3	76.7	39.2	44.6	49.9	1615.2	13.32	12.27	W30X148	C3
		5663.0	1949.4	191.6	217.7	243.8	220575.2	4.06	3.74	W760X220	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
57-1976	IZ	105.5	77.8	37.6	42.9	48.2	1757.0	13.32	12.27	W33X141	C3
		5672.3	1976.4	183.8	209.6	235.3	239936.5	4.06	3.74	W840X210	
57-2010	IZ	105.9	79.1	42.2	47.4	52.6	1336.6	13.32	12.27	W24X176	C3
		5695.0	2010.4	206.1	231.4	256.7	182524.4	4.06	3.74	W610X262	
57-2039	IZ	105.9	80.3	40.2	43.9	47.7	1489.0	12.2	11.22	W27X194	C1
		5695.8	2039.4	196.4	214.5	232.7	203340.3	3.72	3.42	W690X289	
57-1850	IZ	106.4	72.8	39.9	43.7	47.5	1619.4	12.2	11.22	W30X173	D1
		5721.7	1850.0	195.0	213.5	231.9	221143.3	3.72	3.42	W760X257	
57-1627	IZ	106.6	64.0	38.2	42.5	46.8	1894.3	12.2	11.22	W36X135	D2
		5729.3	1626.6	186.6	207.6	228.6	258676.7	3.72	3.42	W920X201	
57-1679	IZ	106.6	66.1	41.9	46.1	50.2	1471.3	12.2	11.22	W27X161	D2
		5732.3	1678.6	204.6	225.0	245.3	200918.1	3.72	3.42	W690X240	
57-1773	IZ	106.7	69.8	39.9	45.5	51.0	1896.7	13.32	12.27	W36X135	D3
		5736.8	1773.0	194.8	222.0	249.1	259015.0	4.06	3.74	W920X201	
58-1799	IZ	107.1	70.8	46.7	50.6	54.5	1376.7	12.2	11.22	W24X207	D1
		5757.9	1799.0	228.0	247.0	266.0	187995.0	3.72	3.42	W610X307	
58-1650	IZ	107.5	64.9	45.2	49.4	53.7	1356.8	12.2	11.22	W24X176	D2
		5780.9	1649.6	220.6	241.3	262.0	185276.3	3.72	3.42	W610X262	
58-1885	IZ	107.6	74.2	66.5	70.2	73.9	944.4	12.2	11.22	W14X342	D1
		5783.0	1885.0	324.6	342.8	360.9	128959.9	3.72	3.42	W360X509	
58-1769	IZ	107.7	69.6	37.6	41.5	45.5	2056.6	12.2	11.22	W40X149	D1
		5790.7	1769.0	183.5	202.8	222.1	280849.8	3.72	3.42	W1000X222	
58-1787	IZ	107.9	70.4	47.7	53.2	58.7	1225.2	13.32	12.27	W21X182	D3
		5799.4	1787.0	232.8	259.8	286.7	167312.0	4.06	3.74	W530X272	
58-1732	IZ	107.9	68.2	62.0	66.0	70.1	902.7	12.2	11.22	W14X283	D2
		5801.3	1731.6	302.6	322.4	342.1	123276.6	3.72	3.42	W360X421	
58-1589	IZ	108.0	62.5	41.7	46.1	50.5	1656.4	12.2	11.22	W30X148	D2
		5807.4	1588.6	203.4	224.9	246.4	226199.8	3.72	3.42	W760X220	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
58-1949	IZ	108.1	76.7	60.3	64.2	68.1	925.8	12.2	11.22	W14X311	C2
		5812.9	1949.0	294.5	313.5	332.5	126429.8	3.72	3.42	W360X463	
58-1659	IZ	108.2	65.3	68.7	72.9	77.1	884.0	12.2	11.22	W12X305	D2
		5817.9	1658.6	335.4	356.0	376.6	120720.9	3.72	3.42	W310X454	
58-1988	IZ	108.5	78.3	36.0	39.8	43.6	1953.5	12.2	11.22	W36X160	C1
		5831.0	1988.4	175.8	194.4	213.0	266769.4	3.72	3.42	W920X238	
58-1616	IZ	108.6	63.6	39.7	44.0	48.3	1807.9	12.2	11.22	W33X141	D2
		5836.5	1615.6	193.7	214.8	236.0	246884.9	3.72	3.42	W840X210	
58-1866	IZ	108.6	73.5	43.4	47.5	51.6	1382.7	12.2	11.22	W24X192	C2
		5836.9	1866.0	212.1	231.9	251.8	188825.2	3.72	3.42	W610X285	
59-1877	IZ	108.9	73.9	66.7	70.7	74.7	915.4	12.2	11.22	W12X336	C2
		5854.9	1877.0	325.5	345.2	364.9	125001.5	3.72	3.42	W310X500	
59-2002	IZ	109.0	78.8	46.3	51.5	56.7	1255.1	13.32	12.27	W21X201	C3
		5859.7	2002.4	226.1	251.5	277.0	171396.3	4.06	3.74	W530X300	
59-2101	IZ	109.1	82.7	64.5	68.1	71.7	977.5	12.2	11.22	W14X370	C1
		5867.6	2101.4	315.0	332.6	350.2	133489.0	3.72	3.42	W360X551	
59-1762	IZ	109.1	69.4	41.2	46.8	52.4	1817.6	13.32	12.27	W33X141	D3
		5867.7	1762.0	201.4	228.7	256.0	248205.0	4.06	3.74	W840X210	
59-1825	IZ	109.3	71.8	43.3	48.7	54.1	1507.6	13.32	12.27	W27X161	D3
		5873.9	1825.0	211.2	237.6	264.0	205880.1	4.06	3.74	W690X240	
59-1895	IZ	109.4	74.6	40.7	44.7	48.7	1520.0	12.2	11.22	W27X178	C2
		5880.0	1895.0	198.9	218.5	238.0	207564.3	3.72	3.42	W690X265	
59-1735	IZ	109.5	68.3	43.1	48.8	54.5	1679.0	13.32	12.27	W30X148	D3
		5886.7	1735.0	210.4	238.1	265.9	229285.9	4.06	3.74	W760X220	
59-1975	IZ	109.7	77.8	37.5	41.3	45.1	1854.6	12.2	11.22	W33X169	C1
		5896.8	1975.4	182.9	201.6	220.3	253268.6	3.72	3.42	W840X251	
59-1642	IZ	110.3	64.6	50.2	54.5	58.7	1270.5	12.2	11.22	W21X201	D2
		5931.6	1641.6	245.1	265.9	286.7	173499.6	3.72	3.42	W530X300	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
59-1825	IZ	110.5	71.8	44.0	47.8	51.7	1552.5	12.2	11.22	W27X194	D1
		5938.6	1825.0	214.9	233.6	252.3	212007.2	3.72	3.42	W690X289	
60-2016	IZ	110.9	79.4	45.9	49.6	53.4	1443.5	12.2	11.22	W24X229	C1
		5964.6	2016.4	224.0	242.3	260.6	197128.8	3.72	3.42	W610X341	
60-1796	IZ	111.2	70.7	46.3	51.8	57.3	1403.0	13.32	12.27	W24X176	D3
		5978.0	1796.0	226.0	252.8	279.6	191593.5	4.06	3.74	W610X262	
60-2065	IZ	111.3	81.3	39.3	42.9	46.6	1707.5	12.2	11.22	W30X191	C1
		5986.5	2065.4	191.7	209.6	227.5	233174.9	3.72	3.42	W760X284	
60-1831	IZ	111.4	72.1	37.8	41.9	46.1	1866.5	12.2	11.22	W33X152	C2
		5990.2	1831.0	184.5	204.7	224.8	254883.8	3.72	3.42	W840X226	
60-2041	IZ	111.5	80.4	42.0	47.1	52.3	1549.0	13.32	12.27	W27X178	C3
		5992.2	2041.4	205.2	230.2	255.1	211523.7	4.06	3.74	W690X265	
60-2012	IZ	111.7	79.2	44.6	49.7	54.9	1422.1	13.32	12.27	W24X192	C3
		6003.2	2012.4	217.5	242.9	268.2	194204.8	4.06	3.74	W610X285	
60-1977	IZ	111.7	77.9	39.3	44.6	49.9	1870.8	13.32	12.27	W33X152	C3
		6003.9	1977.4	192.0	217.8	243.6	255467.9	4.06	3.74	W840X226	
60-1774	IZ	111.7	69.8	39.4	43.3	47.3	2012.6	12.2	11.22	W36X160	D1
		6007.5	1774.0	192.3	211.6	230.8	274841.6	3.72	3.42	W920X238	
61-2055	IZ	112.8	80.9	32.7	36.0	39.3	2842.5	8.35	27.99	IZ B4	B4
		6065.0	2055.0	159.7	175.8	192.0	388162.2	2.54	8.53	IZ B4	
61-1761	IZ	113.5	69.3	41.0	45.0	49.0	1919.7	12.2	11.22	W33X169	D1
		6103.6	1761.0	200.4	219.8	239.2	262149.0	3.72	3.42	W840X251	
61-1987	IZ	113.6	78.2	38.8	44.1	49.3	2037.7	13.32	12.27	W36X150	C3
		6108.9	1987.4	189.5	215.1	240.7	278260.9	4.06	3.74	W920X223	
61-1841	IZ	114.1	72.5	37.2	41.3	45.5	2046.7	12.2	11.22	W36X150	C2
		6135.9	1841.0	181.8	201.8	221.9	279492.5	3.72	3.42	W920X223	
61-1918	IZ	114.3	75.5	39.4	43.4	47.3	1739.0	12.2	11.22	W30X173	C2
		6144.2	1918.0	192.5	211.7	231.0	237473.1	3.72	3.42	W760X257	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
62-1989	IZ	114.4	78.3	37.5	41.3	45.1	2069.7	12.2	11.22	W36X170	C1
		6150.8	1989.4	183.2	201.8	220.4	282631.1	3.72	3.42	W920X253	
62-1652	IZ	114.5	65.0	48.0	52.3	56.5	1458.1	12.2	11.22	W24X192	D2
		6155.1	1651.6	234.6	255.3	276.0	199119.0	3.72	3.42	W610X285	
62-1681	IZ	114.9	66.2	44.9	49.1	53.2	1596.8	12.2	11.22	W27X178	D2
		6177.1	1680.6	219.3	239.7	260.0	218051.5	3.72	3.42	W690X265	
62-1788	IZ	115.0	70.4	50.9	56.4	61.9	1324.0	13.32	12.27	W21X201	D3
		6181.5	1788.0	248.5	275.4	302.4	180809.3	4.06	3.74	W530X300	
62-1867	IZ	115.1	73.5	45.9	50.0	54.0	1479.6	12.2	11.22	W24X207	C2
		6188.3	1867.0	224.2	244.0	263.8	202049.5	3.72	3.42	W610X307	
62-2064	IZ	115.1	81.3	40.8	45.8	50.9	1752.1	13.32	12.27	W30X173	C3
		6190.6	2064.4	199.1	223.8	248.5	239267.3	4.06	3.74	W760X257	
62-1735	IZ	115.2	68.3	66.8	70.8	74.9	986.7	12.2	11.22	W14X311	D2
		6195.0	1734.6	326.1	345.8	365.5	134741.9	3.72	3.42	W360X463	
62-1887	IZ	115.4	74.3	70.9	74.6	78.4	1033.4	12.2	11.22	W14X370	D1
		6203.2	1887.0	346.4	364.5	382.6	141122.6	3.72	3.42	W360X551	
62-1983	IZ	115.5	78.1	38.7	44.0	49.2	2205.8	13.32	12.27	W40X149	C3
		6210.8	1983.4	189.1	214.8	240.4	301224.3	4.06	3.74	W1000X222	
62-2104	IZ	115.8	82.9	68.5	72.1	75.7	1059.8	12.2	11.22	W14X398	C1
		6224.7	2104.4	334.3	351.9	369.5	144724.4	3.72	3.42	W360X592	
62-1851	IZ	115.9	72.9	42.9	46.7	50.4	1777.9	12.2	11.22	W30X191	D1
		6233.5	1851.0	209.3	227.8	246.2	242793.9	3.72	3.42	W760X284	
62-1763	IZ	115.9	69.4	43.1	48.7	54.3	1942.3	13.32	12.27	W33X152	D3
		6233.6	1763.0	210.6	237.9	265.2	265241.1	4.06	3.74	W840X226	
62-1953	IZ	116.0	76.9	65.1	68.9	72.8	1018.0	12.2	11.22	W14X342	C2
		6234.2	1953.0	317.6	336.6	355.5	139023.5	3.72	3.42	W360X509	
62-2042	IZ	116.0	80.4	43.6	47.3	51.0	1649.2	12.2	11.22	W27X217	C1
		6238.7	2042.4	213.0	231.1	249.2	225217.5	3.72	3.42	W690X323	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
62-1617	IZ	116.0	63.6	41.7	46.1	50.4	1944.0	12.2	11.22	W33X152	D2
		6238.9	1616.6	203.7	224.9	246.0	265464.6	3.72	3.42	W840X226	
62-1663	IZ	116.1	65.5	74.2	78.4	82.6	975.5	12.2	11.22	W12X336	D2
		6239.7	1662.6	362.4	383.0	403.5	133216.6	3.72	3.42	W310X500	
63-1802	IZ	116.3	70.9	50.4	54.3	58.1	1513.9	12.2	11.22	W24X229	D1
		6255.1	1802.0	245.9	264.9	283.9	206730.4	3.72	3.42	W610X341	
63-1837	IZ	116.7	72.3	37.1	41.3	45.4	2228.3	12.2	11.22	W40X149	C2
		6274.0	1837.0	181.3	201.4	221.5	304288.6	3.72	3.42	W1000X222	
63-1827	IZ	116.8	71.9	46.0	51.4	56.8	1623.0	13.32	12.27	W27X178	D3
		6278.6	1827.0	224.7	251.1	277.4	221635.2	4.06	3.74	W690X265	
63-1798	IZ	117.5	70.8	48.9	54.4	59.9	1496.1	13.32	12.27	W24X192	D3
		6315.4	1798.0	238.8	265.6	292.4	204302.0	4.06	3.74	W610X285	
63-2013	IZ	117.6	79.3	46.9	52.0	57.2	1511.9	13.32	12.27	W24X207	C3
		6323.6	2013.4	228.7	254.1	279.4	206464.9	4.06	3.74	W610X307	
63-1773	IZ	117.6	69.8	42.5	48.1	53.7	2109.4	13.32	12.27	W36X150	D3
		6324.0	1773.0	207.7	234.8	262.0	288056.9	4.06	3.74	W920X223	
64-1893	IZ	118.2	74.5	43.3	47.3	51.3	1661.9	12.2	11.22	W27X194	C2
		6357.1	1893.0	211.6	231.1	250.7	226947.8	3.72	3.42	W690X289	
64-1775	IZ	118.3	69.9	41.1	45.0	49.0	2140.4	12.2	11.22	W36X170	D1
		6360.9	1775.0	200.6	219.8	239.1	292284.1	3.72	3.42	W920X253	
64-1627	IZ	118.6	64.0	41.1	45.4	49.7	2126.1	12.2	11.22	W36X150	D2
		6373.9	1626.6	200.6	221.6	242.6	290332.5	3.72	3.42	W920X223	
64-1983	IZ	118.7	78.1	37.1	41.0	44.8	2290.0	12.2	11.22	W40X167	C1
		6382.0	1983.4	181.4	200.0	218.6	312716.4	3.72	3.42	W1000X249	
64-1769	IZ	119.3	69.6	42.4	48.0	53.6	2277.6	13.32	12.27	W40X149	D3
		6413.0	1769.0	207.2	234.5	261.7	311031.1	4.06	3.74	W1000X222	
64-1988	IZ	119.4	78.3	40.3	45.6	50.8	2150.1	13.32	12.27	W36X160	C3
		6417.9	1988.4	196.9	222.5	248.1	293620.1	4.06	3.74	W920X238	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
64-2018	IZ	119.5	79.5	49.0	52.8	56.5	1573.4	12.2	11.22	W24X250	C1
		6423.5	2018.4	239.3	257.6	275.9	214867.6	3.72	3.42	W610X372	
64-2039	IZ	119.6	80.3	44.4	49.6	54.7	1680.7	13.32	12.27	W27X194	C3
		6429.1	2039.4	217.0	242.0	266.9	229519.6	4.06	3.74	W690X289	
64-1704	IZ	119.8	67.1	43.4	47.5	51.6	1822.7	12.2	11.22	W30X173	D2
		6440.0	1703.6	211.8	231.8	251.9	248905.7	3.72	3.42	W760X257	
65-1850	IZ	120.3	72.8	44.6	49.9	55.2	1830.7	13.32	12.27	W30X173	D3
		6468.4	1850.0	217.7	243.7	269.7	250003.1	4.06	3.74	W760X257	
65-1842	IZ	120.4	72.5	38.9	43.0	47.1	2168.1	12.2	11.22	W36X160	C2
		6471.5	1842.0	189.8	209.8	229.9	296071.8	3.72	3.42	W920X238	
65-2067	IZ	120.8	81.4	42.2	45.8	49.5	1869.6	12.2	11.22	W30X211	C1
		6496.5	2067.4	205.9	223.8	241.7	255310.9	3.72	3.42	W760X314	
65-1990	IZ	120.9	78.4	39.4	43.2	47.0	2196.8	12.2	11.22	W36X182	C1
		6500.2	1990.4	192.2	210.7	229.3	299985.9	3.72	3.42	W920X271	
65-1623	IZ	121.0	63.9	41.0	45.3	49.6	2309.5	12.2	11.22	W40X149	D2
		6502.8	1622.6	200.1	221.1	242.2	315385.2	3.72	3.42	W1000X222	
65-1975	IZ	121.4	77.8	41.8	47.1	52.4	2052.6	13.32	12.27	W33X169	C3
		6526.1	1975.4	204.1	229.9	255.7	280296.0	4.06	3.74	W840X251	
65-1828	IZ	121.6	72.0	47.8	51.6	55.5	1727.6	12.2	11.22	W27X217	D1
		6535.2	1828.0	233.4	252.1	270.8	235921.6	3.72	3.42	W690X323	
65-1653	IZ	121.7	65.1	50.8	55.1	59.3	1564.7	12.2	11.22	W24X207	D2
		6544.5	1652.6	248.2	268.9	289.6	213677.6	3.72	3.42	W610X307	
66-1829	IZ	122.0	72.0	40.5	44.6	48.7	2062.8	12.2	11.22	W33X169	C2
		6558.8	1829.0	197.5	217.8	238.0	281698.6	3.72	3.42	W840X251	
66-1890	IZ	122.6	74.4	75.3	79.0	82.7	1122.0	12.2	11.22	W14X398	D1
		6589.8	1890.0	367.8	385.9	404.0	153212.4	3.72	3.42	W360X592	
66-1769	IZ	122.6	69.6	40.7	44.6	48.6	2365.6	12.2	11.22	W40X167	D1
		6592.7	1769.0	198.6	217.9	237.2	323044.0	3.72	3.42	W1000X249	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
66-2107	IZ	123.1	83.0	72.4	76.0	79.6	1148.5	12.2	11.22	W14X426	C1
		6617.6	2107.4	353.6	371.1	388.7	156836.2	3.72	3.42	W360X634	
66-2055	IZ	123.5	80.9	34.4	37.7	41.0	3110.8	8.33	27.92	IZ A4	A4
		6637.7	2055.0	167.7	183.9	200.1	424812.2	2.54	8.51	IZ A4	
66-2043	IZ	123.5	80.4	46.4	50.1	53.8	1770.2	12.2	11.22	W27X235	C1
		6641.1	2043.4	226.4	244.5	262.6	241735.6	3.72	3.42	W690X350	
66-1955	IZ	123.6	77.0	69.4	73.2	77.1	1106.6	12.2	11.22	W14X370	C2
		6642.5	1955.0	338.6	357.5	376.4	151117.0	3.72	3.42	W360X551	
66-1919	IZ	123.6	75.6	42.2	46.2	50.1	1894.7	12.2	11.22	W30X191	C2
		6642.8	1919.0	206.3	225.5	244.8	258738.6	3.72	3.42	W760X284	
67-2065	IZ	123.7	81.3	43.4	48.5	53.5	1896.8	13.32	12.27	W30X191	C3
		6650.2	2065.4	212.0	236.6	261.3	259024.6	4.06	3.74	W760X284	
67-1739	IZ	123.8	68.4	72.1	76.1	80.1	1086.7	12.2	11.22	W14X342	D2
		6654.8	1738.6	352.0	371.6	391.3	148401.0	3.72	3.42	W360X509	
67-2083	IZ	124.0	82.0	40.4	44.0	47.6	2086.2	12.2	11.22	W33X201	C1
		6664.1	2083.4	197.2	214.9	232.6	284889.0	3.72	3.42	W840X299	
67-1774	IZ	124.0	69.8	44.2	49.8	55.3	2233.0	13.32	12.27	W36X160	D3
		6665.3	1774.0	215.9	243.1	270.2	304937.8	4.06	3.74	W920X238	
67-1799	IZ	124.0	70.8	51.5	57.0	62.4	1594.0	13.32	12.27	W24X207	D3
		6666.9	1799.0	251.3	278.1	304.9	217672.9	4.06	3.74	W610X307	
67-1870	IZ	124.1	73.6	49.5	53.5	57.6	1615.0	12.2	11.22	W24X229	C2
		6672.9	1870.0	241.5	261.3	281.0	220540.4	3.72	3.42	W610X341	
67-1679	IZ	124.7	66.1	47.8	52.0	56.2	1753.0	12.2	11.22	W27X194	D2
		6705.5	1678.6	233.6	254.0	274.3	239386.2	3.72	3.42	W690X289	
67-1989	IZ	125.3	78.3	41.8	47.1	52.3	2266.2	13.32	12.27	W36X170	C3
		6734.9	1989.4	204.3	229.9	255.5	309468.3	4.06	3.74	W920X253	
68-1776	IZ	125.5	69.9	43.1	47.1	51.0	2280.3	12.2	11.22	W36X182	D1
		6747.3	1776.0	210.6	229.9	249.1	311389.9	3.72	3.42	W920X271	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
68-1628	IZ	125.5	64.1	42.9	47.2	51.5	2260.8	12.2	11.22	W36X160	D2
		6748.2	1627.6	209.6	230.6	251.6	308730.5	3.72	3.42	W920X238	
68-1825	IZ	125.7	71.8	48.7	54.1	59.5	1766.7	13.32	12.27	W27X194	D3
		6758.0	1825.0	237.9	264.2	290.6	241262.3	4.06	3.74	W690X289	
68-1804	IZ	125.7	71.0	53.9	57.8	61.6	1655.5	12.2	11.22	W24X250	D1
		6758.7	1804.0	263.1	282.0	300.9	226079.4	3.72	3.42	W610X372	
68-2016	IZ	125.8	79.4	50.1	55.3	60.5	1637.4	13.32	12.27	W24X229	C3
		6765.7	2016.4	244.8	270.0	295.3	223606.7	4.06	3.74	W610X341	
68-1853	IZ	126.4	73.0	46.1	49.9	53.7	1955.3	12.2	11.22	W30X211	D1
		6794.3	1853.0	225.2	243.6	262.1	267015.0	3.72	3.42	W760X314	
68-1761	IZ	126.7	69.3	45.9	51.5	57.1	2141.7	13.32	12.27	W33X169	D3
		6809.5	1761.0	224.2	251.6	278.9	292467.3	4.06	3.74	W840X251	
68-1843	IZ	126.8	72.6	40.5	44.6	48.7	2293.4	12.2	11.22	W36X170	C2
		6815.6	1843.0	197.7	217.8	237.9	313177.6	3.72	3.42	W920X253	
68-1991	IZ	127.1	78.4	41.1	44.9	48.7	2320.0	12.2	11.22	W36X194	C1
		6835.4	1991.4	200.8	219.3	237.9	316822.9	3.72	3.42	W920X289	
69-1615	IZ	127.8	63.6	44.8	49.1	53.4	2161.4	12.2	11.22	W33X169	D2
		6872.2	1614.6	218.6	239.7	260.9	295159.8	3.72	3.42	W840X251	
69-1983	IZ	128.9	78.1	41.5	46.7	52.0	2487.1	13.32	12.27	W40X167	C3
		6931.3	1983.4	202.5	228.2	253.9	339634.8	4.06	3.74	W1000X249	
69-1896	IZ	129.1	74.6	47.0	51.0	55.0	1834.2	12.2	11.22	W27X217	C2
		6938.4	1896.0	229.5	249.0	268.5	250476.9	3.72	3.42	W690X323	
70-1869	IZ	129.3	73.6	44.1	47.8	51.6	2176.1	12.2	11.22	W33X201	D1
		6951.3	1869.0	215.3	233.6	251.8	297166.9	3.72	3.42	W840X299	
70-2042	IZ	129.5	80.4	47.8	52.9	58.1	1840.7	13.32	12.27	W27X217	C3
		6962.8	2042.4	233.6	258.5	283.5	251358.3	4.06	3.74	W690X323	
70-2111	IZ	129.7	83.1	76.5	80.1	83.6	1232.9	12.2	11.22	W14X455	C1
		6971.8	2111.4	373.4	390.9	408.4	168368.5	3.72	3.42	W360X677	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
70-1851	IZ	129.7	72.9	47.5	52.8	58.2	1989.2	13.32	12.27	W30X191	D3
		6974.0	1851.0	232.0	258.0	284.0	271638.1	4.06	3.74	W760X284	
70-1829	IZ	129.8	72.0	50.9	54.7	58.5	1860.0	12.2	11.22	W27X235	D1
		6977.9	1829.0	248.3	267.0	285.7	253993.8	3.72	3.42	W690X350	
70-2101	IZ	129.9	82.7	68.6	73.6	78.5	1163.6	13.32	12.27	W14X370	C3
		6984.4	2101.4	335.0	359.2	383.5	158895.9	4.06	3.74	W360X551	
70-1705	IZ	130.1	67.1	46.6	50.7	54.8	1994.7	12.2	11.22	W30X191	D2
		6993.6	1704.6	227.3	247.3	267.4	272399.5	3.72	3.42	W760X284	
70-2021	IZ	130.4	79.6	53.3	57.1	60.8	1743.2	12.2	11.22	W24X279	C1
		7012.0	2021.4	260.3	278.6	296.9	238056.0	3.72	3.42	W610X415	
70-1775	IZ	130.5	69.9	45.9	51.5	57.0	2360.6	13.32	12.27	W36X170	D3
		7015.5	1775.0	224.2	251.3	278.5	322363.4	4.06	3.74	W920X253	
70-1893	IZ	130.5	74.5	79.7	83.4	87.1	1217.7	12.2	11.22	W14X426	D1
		7016.5	1893.0	389.2	407.3	425.3	166291.9	3.72	3.42	W360X634	
70-1958	IZ	130.5	77.1	73.6	77.5	81.3	1194.8	12.2	11.22	W14X398	C2
		7017.9	1958.0	359.3	378.2	397.1	163165.5	3.72	3.42	W360X592	
71-1837	IZ	131.2	72.3	40.1	44.2	48.4	2532.0	12.2	11.22	W40X167	C2
		7056.3	1837.0	195.8	216.0	236.1	345760.3	3.72	3.42	W1000X249	
71-1983	IZ	131.6	78.1	39.6	43.4	47.2	2563.9	12.2	11.22	W40X183	C1
		7073.3	1983.4	193.2	211.9	230.5	350129.8	3.72	3.42	W1000X272	
71-1656	IZ	131.7	65.2	54.8	59.1	63.3	1713.7	12.2	11.22	W24X229	D2
		7080.9	1655.6	267.7	288.3	309.0	234023.2	3.72	3.42	W610X341	
71-1990	IZ	131.7	78.4	43.7	48.9	54.2	2393.2	13.32	12.27	W36X182	C3
		7081.5	1990.4	213.2	238.8	264.4	326809.7	4.06	3.74	W920X271	
71-1741	IZ	132.1	68.5	76.9	80.9	84.9	1183.1	12.2	11.22	W14X370	D2
		7101.7	1740.6	375.5	395.1	414.7	161564.3	3.72	3.42	W360X551	
71-1777	IZ	132.4	70.0	45.1	49.0	53.0	2415.9	12.2	11.22	W36X194	D1
		7118.0	1777.0	220.2	239.5	258.7	329918.4	3.72	3.42	W920X289	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
71-1629	IZ	132.7	64.1	44.8	49.1	53.4	2399.8	12.2	11.22	W36X170	D2
		7132.1	1628.6	218.6	239.6	260.6	327720.2	3.72	3.42	W920X253	
72-1802	IZ	133.0	70.9	55.1	60.6	66.1	1730.8	13.32	12.27	W24X229	D3
		7151.6	1802.0	269.2	295.9	322.7	236358.9	4.06	3.74	W610X341	
72-2067	IZ	133.1	81.4	46.3	51.4	56.4	2058.7	13.32	12.27	W30X211	C3
		7153.6	2067.4	226.2	250.8	275.5	281135.6	4.06	3.74	W760X314	
72-1872	IZ	133.3	73.7	52.8	56.9	60.9	1754.9	12.2	11.22	W24X250	C2
		7164.2	1872.0	258.0	277.8	297.5	239641.4	3.72	3.42	W610X372	
72-2065	IZ	133.3	81.3	45.7	49.4	53.0	2086.3	12.2	11.22	W30X235	C1
		7167.2	2065.4	223.2	241.1	259.0	284897.6	3.72	3.42	W760X350	
72-2045	IZ	133.5	80.5	49.6	53.3	57.0	1934.3	12.2	11.22	W27X258	C1
		7177.8	2045.4	242.3	260.3	278.4	264143.6	3.72	3.42	W690X384	
72-1921	IZ	133.7	75.6	45.4	49.3	53.3	2069.0	12.2	11.22	W30X211	C2
		7189.2	1921.0	221.6	240.8	260.1	282535.0	3.72	3.42	W760X314	
72-1844	IZ	133.8	72.6	42.5	46.6	50.7	2430.4	12.2	11.22	W36X182	C2
		7191.6	1844.0	207.4	227.5	247.5	331893.7	3.72	3.42	W920X271	
72-1769	IZ	134.1	69.6	45.5	51.1	56.7	2586.6	13.32	12.27	W40X167	D3
		7208.7	1769.0	222.3	249.5	276.8	353225.2	4.06	3.74	W1000X249	
72-2018	IZ	134.2	79.5	53.3	58.4	63.6	1767.1	13.32	12.27	W24X250	C3
		7214.3	2018.4	260.1	285.3	310.6	241319.2	4.06	3.74	W610X372	
72-2084	IZ	134.6	82.1	43.3	46.9	50.6	2283.2	12.2	11.22	W33X221	C1
		7234.0	2084.4	211.4	229.1	246.8	311785.5	3.72	3.42	W840X329	
73-2083	IZ	135.1	82.0	44.5	49.5	54.5	2273.9	13.32	12.27	W33X201	C3
		7263.5	2083.4	217.3	241.7	266.2	310515.4	4.06	3.74	W840X299	
73-1992	IZ	135.6	78.4	43.6	47.4	51.2	2488.1	12.2	11.22	W36X210	C1
		7291.3	1992.4	212.9	231.4	250.0	339772.4	3.72	3.42	W920X313	
73-2104	IZ	136.1	82.9	72.6	77.5	82.5	1245.6	13.32	12.27	W14X398	C3
		7315.9	2104.4	354.3	378.5	402.7	170095.0	4.06	3.74	W360X592	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
73-1828	IZ	136.6	72.0	52.5	57.9	63.3	1941.5	13.32	12.27	W27X217	D3
		7344.3	1828.0	256.4	282.7	309.0	265128.7	4.06	3.74	W690X323	
74-1937	IZ	136.7	76.3	43.4	47.3	51.3	2300.3	12.2	11.22	W33X201	C2
		7347.9	1937.0	212.1	231.1	250.2	314123.7	3.72	3.42	W840X299	
74-1682	IZ	136.7	66.2	52.0	56.1	60.3	1943.0	12.2	11.22	W27X217	D2
		7350.0	1681.6	253.7	274.1	294.4	265333.8	3.72	3.42	W690X323	
74-1769	IZ	136.8	69.6	43.4	47.4	51.3	2666.3	12.2	11.22	W40X183	D1
		7355.6	1769.0	211.9	231.2	250.5	364102.3	3.72	3.42	W1000X272	
74-2043	IZ	136.9	80.4	50.6	55.7	60.8	1961.5	13.32	12.27	W27X235	C3
		7358.9	2043.4	246.9	271.8	296.8	267863.6	4.06	3.74	W690X350	
74-1897	IZ	137.1	74.7	49.9	53.9	57.9	1964.4	12.2	11.22	W27X235	C2
		7369.7	1897.0	243.8	263.3	282.8	268256.5	3.72	3.42	W690X350	
74-1623	IZ	137.2	63.9	44.3	48.7	53.0	2646.4	12.2	11.22	W40X167	D2
		7375.2	1622.6	216.5	237.6	258.6	361386.4	3.72	3.42	W1000X249	
74-1776	IZ	137.6	69.9	48.0	53.5	59.1	2500.4	13.32	12.27	W36X182	D3
		7398.7	1776.0	234.3	261.4	288.5	341452.2	4.06	3.74	W920X271	
74-1897	IZ	137.6	74.7	84.2	87.9	91.6	1308.7	12.2	11.22	W14X455	D1
		7400.4	1897.0	411.2	429.2	447.2	178720.8	3.72	3.42	W360X677	
74-1807	IZ	137.7	71.1	58.7	62.6	66.4	1840.8	12.2	11.22	W24X279	D1
		7404.5	1807.0	286.5	305.4	324.3	251384.1	3.72	3.42	W610X415	
74-1991	IZ	137.9	78.4	45.4	50.7	55.9	2516.4	13.32	12.27	W36X194	C3
		7413.9	1991.4	221.8	247.4	273.0	343633.2	4.06	3.74	W920X289	
74-2083	IZ	137.9	82.0	40.0	43.6	47.3	2666.7	12.2	11.22	W40X199	C1
		7416.6	2083.4	195.3	213.0	230.8	364155.3	3.72	3.42	W1000X296	
74-1961	IZ	138.2	77.2	77.8	81.7	85.6	1289.9	12.2	11.22	W14X426	C2
		7432.6	1961.0	380.0	398.8	417.7	176153.3	3.72	3.42	W360X634	
75-1887	IZ	138.5	74.3	75.5	80.7	85.9	1240.6	13.32	12.27	W14X370	D3
		7446.9	1887.0	368.6	394.1	419.6	169416.5	4.06	3.74	W360X551	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
75-1744	IZ	139.7	68.6	81.7	85.7	89.7	1278.8	12.2	11.22	W14X398	D2
		7511.1	1743.6	398.7	418.3	437.9	174634.0	3.72	3.42	W360X592	
75-1853	IZ	140.0	73.0	50.8	56.1	61.4	2166.3	13.32	12.27	W30X211	D3
		7527.4	1853.0	247.8	273.8	299.8	295828.0	4.06	3.74	W760X314	
75-1851	IZ	140.1	72.9	50.1	53.9	57.6	2192.5	12.2	11.22	W30X235	D1
		7532.3	1851.0	244.5	263.0	281.4	299410.0	3.72	3.42	W760X350	
76-1630	IZ	140.5	64.2	47.0	51.3	55.6	2552.2	12.2	11.22	W36X182	D2
		7551.9	1629.6	229.6	250.5	271.5	348520.7	3.72	3.42	W920X271	
76-1845	IZ	140.5	72.6	44.4	48.5	52.6	2563.4	12.2	11.22	W36X194	C2
		7552.3	1845.0	216.7	236.7	256.8	350049.4	3.72	3.42	W920X289	
76-1831	IZ	140.8	72.1	54.5	58.3	62.1	2039.3	12.2	11.22	W27X258	D1
		7567.6	1831.0	266.1	284.7	303.4	278487.1	3.72	3.42	W690X384	
76-1870	IZ	141.0	73.6	47.3	51.1	54.8	2392.0	12.2	11.22	W33X221	D1
		7578.7	1870.0	231.1	249.4	267.7	326642.1	3.72	3.42	W840X329	
76-2023	IZ	141.1	79.7	57.2	61.0	64.7	1913.6	12.2	11.22	W24X306	C1
		7585.4	2023.4	279.4	297.7	316.0	261315.6	3.72	3.42	W610X455	
76-2115	IZ	141.3	83.3	82.8	86.4	89.9	1385.2	12.2	11.22	W14X500	C1
		7597.0	2115.4	404.2	421.7	439.2	189165.6	3.72	3.42	W360X744	
76-1707	IZ	141.4	67.2	50.1	54.2	58.3	2187.1	12.2	11.22	W30X211	D2
		7599.6	1706.6	244.5	264.5	284.5	298663.7	3.72	3.42	W760X314	
76-1983	IZ	141.7	78.1	43.9	49.2	54.4	2761.1	13.32	12.27	W40X183	C3
		7617.1	1983.4	214.4	240.1	265.8	377048.2	4.06	3.74	W1000X272	
76-1869	IZ	141.7	73.6	48.7	54.0	59.2	2385.3	13.32	12.27	W33X201	D3
		7619.5	1869.0	237.7	263.5	289.2	325733.3	4.06	3.74	W840X299	
76-1778	IZ	141.8	70.0	47.9	51.8	55.8	2601.1	12.2	11.22	W36X210	D1
		7622.5	1778.0	233.8	253.0	272.2	355208.8	3.72	3.42	W920X313	
76-1658	IZ	141.8	65.3	58.6	62.9	67.1	1867.7	12.2	11.22	W24X250	D2
		7624.8	1657.6	286.3	306.9	327.5	255048.2	3.72	3.42	W610X372	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
76-1804	IZ	142.2	71.0	58.6	64.1	69.6	1872.3	13.32	12.27	W24X250	D3
		7643.5	1804.0	286.3	313.0	339.7	255675.1	4.06	3.74	W610X372	
77-2107	IZ	143.0	83.0	76.5	81.5	86.4	1334.0	13.32	12.27	W14X426	C3
		7686.5	2107.4	373.5	397.7	421.9	182170.8	4.06	3.74	W360X634	
77-2047	IZ	143.7	80.6	53.1	56.8	60.5	2105.3	12.2	11.22	W27X281	C1
		7728.3	2047.4	259.3	277.3	295.4	287491.5	3.72	3.42	W690X419	
77-1869	IZ	143.8	73.6	43.7	47.4	51.2	2780.2	12.2	11.22	W40X199	D1
		7732.3	1869.0	213.2	231.5	249.7	379657.2	3.72	3.42	W1000X296	
77-1723	IZ	144.1	67.8	47.8	51.9	56.0	2424.5	12.2	11.22	W33X201	D2
		7744.7	1722.6	233.6	253.4	273.2	331084.2	3.72	3.42	W840X299	
78-1777	IZ	144.5	70.0	49.9	55.5	61.0	2636.0	13.32	12.27	W36X194	D3
		7766.2	1777.0	243.9	270.9	298.0	359963.7	4.06	3.74	W920X289	
78-1829	IZ	144.7	72.0	55.6	60.9	66.3	2073.7	13.32	12.27	W27X235	D3
		7779.8	1829.0	271.3	297.6	323.9	283184.9	4.06	3.74	W690X350	
78-2021	IZ	144.9	79.6	57.6	62.7	67.9	1936.7	13.32	12.27	W24X279	C3
		7789.9	2021.4	281.0	306.3	331.5	264468.3	4.06	3.74	W610X415	
78-1875	IZ	145.0	73.8	57.5	61.5	65.6	1937.6	12.2	11.22	W24X279	C2
		7793.8	1875.0	280.6	300.3	320.0	264600.7	3.72	3.42	W610X415	
78-2086	IZ	145.0	82.1	46.2	49.8	53.4	2478.1	12.2	11.22	W33X241	C1
		7797.4	2086.4	225.5	243.2	260.9	338405.8	3.72	3.42	W840X359	
78-1837	IZ	145.1	72.3	42.7	46.9	51.0	2827.8	12.2	11.22	W40X183	C2
		7801.1	1837.0	208.6	228.8	248.9	386155.4	3.72	3.42	W1000X272	
78-2068	IZ	145.1	81.4	49.5	53.2	56.9	2293.7	12.2	11.22	W30X261	C1
		7801.2	2068.4	241.9	259.7	277.6	313219.4	3.72	3.42	W760X389	
78-1890	IZ	145.2	74.4	79.9	85.1	90.3	1328.8	13.32	12.27	W14X398	D3
		7804.8	1890.0	390.0	415.5	441.0	181461.4	4.06	3.74	W360X592	
78-1965	IZ	145.2	77.4	82.2	86.0	89.9	1380.4	12.2	11.22	W14X455	C2
		7805.6	1965.0	401.2	420.0	438.8	188505.5	3.72	3.42	W360X677	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
78-2101	IZ	145.4	82.7	44.2	47.8	51.4	2609.5	12.2	11.22	W36X230	C1
		7814.7	2101.4	215.6	233.2	250.8	356348.2	3.72	3.42	W920X342	
78-2065	IZ	145.4	81.3	49.9	54.9	60.0	2275.6	13.32	12.27	W30X235	C3
		7817.5	2065.4	243.5	268.2	292.8	310747.4	4.06	3.74	W760X350	
78-2084	IZ	145.6	82.1	47.4	52.4	57.4	2470.7	13.32	12.27	W33X221	C3
		7828.3	2084.4	231.5	255.9	280.4	337399.6	4.06	3.74	W840X329	
78-1683	IZ	145.6	66.2	55.3	59.4	63.6	2086.7	12.2	11.22	W27X235	D2
		7828.6	1682.6	269.9	290.2	310.5	284960.9	3.72	3.42	W690X350	
79-1992	IZ	146.3	78.4	47.9	53.1	58.4	2684.3	13.32	12.27	W36X210	C3
		7866.3	1992.4	233.9	259.5	285.1	366569.2	4.06	3.74	W920X313	
79-2045	IZ	146.7	80.5	53.8	58.9	64.0	2125.4	13.32	12.27	W27X258	C3
		7887.1	2045.4	262.8	287.7	312.6	290246.0	4.06	3.74	W690X384	
79-1919	IZ	147.1	75.6	49.2	53.1	57.1	2302.4	12.2	11.22	W30X235	C2
		7909.6	1919.0	240.2	259.5	278.8	314407.3	3.72	3.42	W760X350	
79-1983	IZ	147.5	78.1	43.9	47.7	51.5	2904.5	12.2	11.22	W40X211	C1
		7932.6	1983.4	214.2	232.9	251.5	396629.6	3.72	3.42	W1000X314	
79-2083	IZ	147.7	82.0	44.1	49.1	54.1	2854.3	13.32	12.27	W40X199	C3
		7938.5	2083.4	215.4	239.9	264.3	389781.7	4.06	3.74	W1000X296	
79-1899	IZ	147.8	74.8	53.4	57.4	61.4	2140.9	12.2	11.22	W27X258	C2
		7944.7	1899.0	261.0	280.4	299.9	292364.0	3.72	3.42	W690X384	
80-1631	IZ	148.0	64.2	49.2	53.5	57.7	2699.9	12.2	11.22	W36X194	D2
		7954.5	1630.6	240.0	261.0	281.9	368689.9	3.72	3.42	W920X289	
80-1938	IZ	148.0	76.3	46.6	50.5	54.4	2512.0	12.2	11.22	W33X221	C2
		7959.1	1938.0	227.3	246.4	265.5	343037.0	3.72	3.42	W840X329	
80-1747	IZ	148.2	68.8	86.4	90.4	94.4	1382.4	12.2	11.22	W14X426	D2
		7965.1	1746.6	421.8	441.4	461.0	188773.1	3.72	3.42	W360X634	
80-1769	IZ	148.2	69.6	48.3	53.8	59.4	2887.3	13.32	12.27	W40X183	D3
		7965.3	1769.0	235.6	262.9	290.1	394283.6	4.06	3.74	W1000X272	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
80-2111	IZ	149.2	83.1	80.5	85.5	90.4	1418.1	13.32	12.27	W14X455	C3
		8018.8	2111.4	393.2	417.4	441.5	193655.1	4.06	3.74	W360X677	
80-1809	IZ	149.4	71.2	63.1	66.9	70.8	2026.8	12.2	11.22	W24X306	D1
		8034.1	1809.0	307.9	326.8	345.7	276773.4	3.72	3.42	W610X455	
80-1846	IZ	149.6	72.7	47.1	51.2	55.3	2744.6	12.2	11.22	W36X210	C2
		8042.9	1846.0	229.7	249.8	269.8	374801.0	3.72	3.42	W920X313	
80-1991	IZ	149.6	78.4	46.8	50.7	54.5	2777.3	12.2	11.22	W36X232	C1
		8043.8	1991.4	228.7	247.3	265.9	379267.4	3.72	3.42	W920X345	
81-1901	IZ	150.3	74.8	91.2	94.9	98.6	1473.2	12.2	11.22	W14X500	D1
		8079.5	1901.0	445.4	463.4	481.3	201178.5	3.72	3.42	W360X744	
81-2083	IZ	151.0	82.0	42.5	46.1	49.7	2943.5	12.2	11.22	W40X215	C1
		8120.4	2083.4	207.3	225.1	242.8	401961.9	3.72	3.42	W1000X321	
81-1937	IZ	151.3	76.3	43.0	46.9	50.8	2924.6	12.2	11.22	W40X199	C2
		8134.0	1937.0	210.0	229.1	248.2	399381.1	3.72	3.42	W1000X296	
82-1833	IZ	152.0	72.2	58.4	62.2	66.0	2226.3	12.2	11.22	W27X281	D1
		8172.7	1833.0	285.0	303.7	322.3	304024.2	3.72	3.42	W690X419	
82-2026	IZ	152.4	79.8	61.6	65.3	69.1	2097.1	12.2	11.22	W24X335	C1
		8193.8	2026.4	300.7	319.0	337.2	286373.8	3.72	3.42	W610X498	
82-1872	IZ	152.5	73.7	50.6	54.3	58.0	2605.7	12.2	11.22	W33X241	D1
		8199.0	1872.0	246.8	265.1	283.3	355837.9	3.72	3.42	W840X359	
82-1887	IZ	152.5	74.3	48.3	52.0	55.7	2737.9	12.2	11.22	W36X230	D1
		8199.1	1887.0	235.7	253.8	271.9	373878.4	3.72	3.42	W920X342	
82-1623	IZ	152.6	63.9	47.3	51.6	55.9	2974.2	12.2	11.22	W40X183	D2
		8205.0	1622.6	231.0	252.1	273.2	406149.3	3.72	3.42	W1000X272	
82-1893	IZ	152.6	74.5	84.3	89.5	94.7	1424.3	13.32	12.27	W14X426	D3
		8206.6	1893.0	411.4	436.8	462.2	194496.2	4.06	3.74	W360X634	
82-1854	IZ	153.1	73.0	54.3	58.1	61.9	2419.7	12.2	11.22	W30X261	D1
		8230.1	1854.0	265.3	283.7	302.1	330436.5	3.72	3.42	W760X389	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
82-1870	IZ	153.3	73.6	51.9	57.2	62.5	2601.0	13.32	12.27	W33X221	D3
		8241.1	1870.0	253.6	279.3	305.0	355193.3	4.06	3.74	W840X329	
83-1851	IZ	153.6	72.9	54.7	60.1	65.4	2403.8	13.32	12.27	W30X235	D3
		8258.0	1851.0	267.2	293.2	319.2	328254.2	4.06	3.74	W760X350	
83-1778	IZ	153.8	70.0	52.7	58.3	63.8	2821.0	13.32	12.27	W36X210	D3
		8266.9	1778.0	257.4	284.5	311.6	385237.3	4.06	3.74	W920X313	
83-2102	IZ	153.9	82.8	46.4	50.0	53.6	2774.8	12.2	11.22	W36X245	C1
		8273.4	2102.4	226.4	244.0	261.5	378923.8	3.72	3.42	W920X365	
83-1807	IZ	153.9	71.1	63.4	68.9	74.4	2057.2	13.32	12.27	W24X279	D3
		8274.8	1807.0	309.7	336.4	363.0	280930.7	4.06	3.74	W610X415	
83-2120	IZ	154.3	83.5	89.6	93.1	96.7	1561.0	12.2	11.22	W14X550	C1
		8294.3	2120.4	437.3	454.8	472.2	213164.7	3.72	3.42	W360X818	
83-2050	IZ	154.4	80.7	56.8	60.5	64.2	2285.6	12.2	11.22	W27X307	C1
		8300.9	2050.4	277.3	295.3	313.3	312112.4	3.72	3.42	W690X457	
83-1769	IZ	154.5	69.6	48.2	52.2	56.1	3041.5	12.2	11.22	W40X211	D1
		8306.9	1769.0	235.4	254.8	274.1	415345.1	3.72	3.42	W1000X314	
83-1869	IZ	154.6	73.6	48.3	53.5	58.8	2989.4	13.32	12.27	W40X199	D3
		8314.1	1869.0	235.6	261.4	287.1	408223.7	4.06	3.74	W1000X296	
83-1661	IZ	154.8	65.4	63.9	68.1	72.3	2068.9	12.2	11.22	W24X279	D2
		8322.0	1660.6	311.8	332.4	352.9	282531.5	3.72	3.42	W610X415	
84-2023	IZ	155.3	79.7	61.5	66.6	71.8	2106.8	13.32	12.27	W24X306	C3
		8351.3	2023.4	300.2	325.3	350.5	287701.9	4.06	3.74	W610X455	
84-1831	IZ	155.5	72.1	59.2	64.6	70.0	2252.8	13.32	12.27	W27X258	D3
		8360.0	1831.0	289.0	315.3	341.6	307646.4	4.06	3.74	W690X384	
84-2101	IZ	155.7	82.7	48.3	53.2	58.2	2795.5	13.32	12.27	W36X230	C3
		8371.8	2101.4	235.6	259.9	284.1	381755.0	4.06	3.74	W920X342	
84-1751	IZ	155.7	68.9	91.3	95.2	99.2	1480.6	12.2	11.22	W14X455	D2
		8372.3	1750.6	445.5	465.1	484.6	202190.0	3.72	3.42	W360X677	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
84-2086	IZ	156.0	82.1	50.3	55.3	60.3	2665.5	13.32	12.27	W33X241	C3
		8387.0	2086.4	245.6	270.0	294.4	363995.3	4.06	3.74	W840X359	
84-1705	IZ	156.2	67.1	54.4	58.5	62.6	2444.9	12.2	11.22	W30X235	D2
		8399.4	1704.6	265.5	285.6	305.6	333878.1	3.72	3.42	W760X350	
84-1877	IZ	156.4	73.9	61.7	65.7	69.8	2121.0	12.2	11.22	W24X306	C2
		8407.7	1877.0	301.2	320.9	340.6	289646.3	3.72	3.42	W610X455	
84-1724	IZ	156.7	67.9	51.4	55.4	59.5	2658.5	12.2	11.22	W33X221	D2
		8423.3	1723.6	250.8	270.6	290.4	363043.4	3.72	3.42	W840X329	
84-2047	IZ	156.8	80.6	57.3	62.4	67.5	2296.2	13.32	12.27	W27X281	C3
		8429.3	2047.4	279.8	304.7	329.5	313568.5	4.06	3.74	W690X419	
84-2068	IZ	157.1	81.4	53.7	58.7	63.8	2482.7	13.32	12.27	W30X261	C3
		8444.1	2068.4	262.1	286.8	311.4	339031.6	4.06	3.74	W760X389	
85-1777	IZ	157.2	70.0	51.5	55.5	59.4	2918.5	12.2	11.22	W36X232	D1
		8452.9	1777.0	251.6	270.8	290.1	398552.4	3.72	3.42	W920X345	
85-1685	IZ	157.5	66.3	59.2	63.4	67.5	2281.4	12.2	11.22	W27X258	D2
		8465.9	1684.6	289.2	309.5	329.7	311546.1	3.72	3.42	W690X384	
85-1969	IZ	157.5	77.5	88.9	92.8	96.6	1543.7	12.2	11.22	W14X500	C2
		8466.2	1969.0	434.3	453.0	471.8	210807.9	3.72	3.42	W360X744	
85-1983	IZ	157.6	78.1	48.2	53.5	58.7	3101.6	13.32	12.27	W40X211	C3
		8471.0	1983.4	235.4	261.1	286.7	423548.0	4.06	3.74	W1000X314	
85-2084	IZ	158.1	82.1	49.5	53.1	56.7	2729.1	12.2	11.22	W33X263	C1
		8498.9	2084.4	241.5	259.2	277.0	372678.5	3.72	3.42	W840X392	
85-1632	IZ	158.2	64.2	52.2	56.5	60.8	2901.5	12.2	11.22	W36X210	D2
		8502.7	1631.6	254.8	275.7	296.7	396225.9	3.72	3.42	W920X313	
85-1869	IZ	158.2	73.6	46.4	50.2	53.9	3083.9	12.2	11.22	W40X215	D1
		8507.7	1869.0	226.6	244.9	263.2	421133.3	3.72	3.42	W1000X321	
85-1901	IZ	158.7	74.8	57.2	61.2	65.2	2324.9	12.2	11.22	W27X281	C2
		8534.4	1901.0	279.3	298.7	318.1	317480.4	3.72	3.42	W690X419	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
86-1940	IZ	159.3	76.4	49.7	53.6	57.5	2721.4	12.2	11.22	W33X241	C2
		8563.0	1940.0	242.5	261.5	280.6	371634.0	3.72	3.42	W840X359	
86-1897	IZ	159.3	74.7	88.7	93.9	99.1	1514.8	13.32	12.27	W14X455	D3
		8565.9	1897.0	433.3	458.6	484.0	206865.5	4.06	3.74	W360X677	
86-1723	IZ	159.3	67.8	47.4	51.4	55.5	3079.9	12.2	11.22	W40X199	D2
		8565.9	1722.6	231.3	251.1	271.0	420585.3	3.72	3.42	W1000X296	
86-1955	IZ	159.4	77.0	47.5	51.3	55.2	2860.8	12.2	11.22	W36X230	C2
		8567.2	1955.0	231.8	250.7	269.6	390665.0	3.72	3.42	W920X342	
86-1922	IZ	159.8	75.7	53.3	57.2	61.2	2525.2	12.2	11.22	W30X261	C2
		8588.8	1922.0	260.3	279.5	298.7	344840.2	3.72	3.42	W760X389	
86-2070	IZ	160.2	81.5	54.0	57.6	61.3	2563.1	12.2	11.22	W30X292	C1
		8610.5	2070.4	263.6	281.5	299.3	350017.9	3.72	3.42	W760X434	
86-2115	IZ	160.2	83.3	86.9	91.8	96.7	1570.1	13.32	12.27	W14X500	C3
		8610.6	2115.4	424.0	448.1	472.2	214404.3	4.06	3.74	W360X744	
86-1991	IZ	160.2	78.4	51.2	56.4	61.6	2973.6	13.32	12.27	W36X232	C3
		8612.5	1991.4	249.8	275.4	301.0	406077.7	4.06	3.74	W920X345	
86-2083	IZ	160.7	82.0	46.6	51.6	56.6	3131.2	13.32	12.27	W40X215	C3
		8638.1	2083.4	227.5	251.9	276.4	427588.3	4.06	3.74	W1000X321	
87-1985	IZ	161.2	78.2	47.5	51.3	55.1	3199.5	12.2	11.22	W40X235	C1
		8669.2	1985.4	231.8	250.4	269.0	436926.2	3.72	3.42	W1000X350	
87-1812	IZ	161.9	71.3	67.9	71.8	75.7	2227.1	12.2	11.22	W24X335	D1
		8702.0	1812.0	331.7	350.5	369.4	304135.4	3.72	3.42	W610X498	
87-1888	IZ	161.9	74.3	50.7	54.4	58.1	2919.5	12.2	11.22	W36X245	D1
		8704.8	1888.0	247.6	265.7	283.8	398679.5	3.72	3.42	W920X365	
87-2103	IZ	162.2	82.8	48.5	52.1	55.7	2940.7	12.2	11.22	W36X260	C1
		8720.5	2103.4	236.7	254.3	271.9	401577.8	3.72	3.42	W920X387	
87-1837	IZ	162.3	72.3	47.4	51.5	55.6	3195.4	12.2	11.22	W40X211	C2
		8727.2	1837.0	231.3	251.4	271.5	436361.0	3.72	3.42	W1000X314	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
88-1993	IZ	162.7	78.5	50.6	54.4	58.2	3045.3	12.2	11.22	W36X256	C1
		8745.7	1993.4	247.0	265.6	284.1	415857.6	3.72	3.42	W920X381	
88-1836	IZ	163.7	72.3	62.5	66.3	70.1	2423.5	12.2	11.22	W27X307	D1
		8802.0	1836.0	305.1	323.7	342.3	330956.3	3.72	3.42	W690X457	
88-1887	IZ	164.0	74.3	52.8	58.1	63.3	2945.0	13.32	12.27	W36X230	D3
		8819.6	1887.0	257.9	283.4	309.0	402172.4	4.06	3.74	W920X342	
88-2102	IZ	164.2	82.8	50.5	55.4	60.4	2960.8	13.32	12.27	W36X245	C3
		8827.9	2102.4	246.3	270.6	294.8	404318.6	4.06	3.74	W920X365	
88-1906	IZ	164.4	75.0	98.7	102.4	106.1	1663.1	12.2	11.22	W14X550	D1
		8837.0	1906.0	482.1	500.0	518.0	227110.0	3.72	3.42	W360X818	
89-1845	IZ	164.7	72.6	50.6	54.7	58.8	3056.9	12.2	11.22	W36X232	C2
		8853.6	1845.0	246.9	266.9	287.0	417448.9	3.72	3.42	W920X345	
89-1872	IZ	164.7	73.7	55.1	60.4	65.7	2814.6	13.32	12.27	W33X241	D3
		8856.2	1872.0	269.2	294.9	320.7	384358.5	4.06	3.74	W840X359	
89-1937	IZ	165.4	76.3	45.7	49.6	53.5	3222.4	12.2	11.22	W40X215	C2
		8889.8	1937.0	223.0	242.1	261.2	440045.1	3.72	3.42	W1000X321	
89-1809	IZ	165.4	71.2	67.8	73.3	78.7	2242.9	13.32	12.27	W24X306	D3
		8890.8	1809.0	331.1	357.7	384.3	306287.3	4.06	3.74	W610X455	
89-1769	IZ	165.7	69.6	53.1	58.7	64.2	3262.5	13.32	12.27	W40X211	D3
		8910.5	1769.0	259.2	286.4	313.6	445526.3	4.06	3.74	W1000X314	
89-2030	IZ	166.0	79.9	66.8	70.5	74.2	2323.4	12.2	11.22	W24X370	C1
		8925.0	2030.4	326.0	344.2	362.4	317283.0	3.72	3.42	W610X551	
90-1854	IZ	166.4	73.0	59.0	64.3	69.6	2630.6	13.32	12.27	W30X261	D3
		8947.3	1854.0	287.9	313.9	339.9	359234.1	4.06	3.74	W760X389	
90-2026	IZ	166.4	79.8	65.8	71.0	76.1	2290.0	13.32	12.27	W24X335	C3
		8947.7	2026.4	321.4	346.6	371.7	312721.1	4.06	3.74	W610X498	
90-1833	IZ	166.6	72.2	63.1	68.4	73.8	2439.6	13.32	12.27	W27X281	D3
		8955.7	1833.0	307.9	334.2	360.5	333151.7	4.06	3.74	W690X419	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
90-1870	IZ	166.9	73.6	54.2	58.0	61.7	2880.8	12.2	11.22	W33X263	D1
		8971.4	1870.0	264.7	283.0	301.2	393394.3	3.72	3.42	W840X392	
90-2053	IZ	167.1	80.8	61.0	64.7	68.4	2505.8	12.2	11.22	W27X336	C1
		8981.4	2053.4	297.9	315.9	333.9	342191.7	3.72	3.42	W690X500	
90-2050	IZ	167.3	80.7	61.0	66.1	71.2	2476.2	13.32	12.27	W27X307	C3
		8993.4	2050.4	297.7	322.6	347.4	338151.2	4.06	3.74	W690X457	
90-1663	IZ	167.4	65.5	68.6	72.8	77.0	2271.0	12.2	11.22	W24X306	D2
		9002.0	1662.6	335.0	355.6	376.1	310119.0	3.72	3.42	W610X455	
91-1880	IZ	168.5	74.0	66.4	70.4	74.4	2318.5	12.2	11.22	W24X335	C2
		9059.0	1880.0	324.1	343.8	363.5	316610.6	3.72	3.42	W610X498	
91-1956	IZ	168.5	77.0	49.8	53.7	57.6	3038.3	12.2	11.22	W36X245	C2
		9059.2	1956.0	243.3	262.2	281.1	414912.8	3.72	3.42	W920X365	
91-1741	IZ	168.8	68.5	52.3	56.4	60.4	3030.9	12.2	11.22	W36X230	D2
		9076.7	1740.6	255.5	275.1	294.8	413897.2	3.72	3.42	W920X342	
91-2083	IZ	168.8	82.0	44.6	48.3	51.9	3622.8	12.2	11.22	W44X230	C1
		9077.6	2083.4	217.9	235.6	253.4	494730.1	3.72	3.42	W1100X343	
91-2084	IZ	168.9	82.1	53.6	58.6	63.6	2916.6	13.32	12.27	W33X263	C3
		9083.1	2084.4	261.6	286.1	310.5	398292.5	4.06	3.74	W840X392	
91-1869	IZ	169.0	73.6	51.0	56.3	61.6	3293.1	13.32	12.27	W40X215	D3
		9084.8	1869.0	249.1	274.8	300.6	449699.8	4.06	3.74	W1000X321	
91-1777	IZ	169.1	70.0	56.4	61.9	67.5	3138.6	13.32	12.27	W36X232	D3
		9090.1	1777.0	275.2	302.3	329.4	428597.8	4.06	3.74	W920X345	
91-2125	IZ	169.1	83.7	97.7	101.2	104.8	1767.5	12.2	11.22	W14X605	C1
		9091.1	2125.4	476.9	494.3	511.7	241368.5	3.72	3.42	W360X900	
91-1726	IZ	169.1	67.9	54.8	58.9	62.9	2890.1	12.2	11.22	W33X241	D2
		9093.9	1725.6	267.7	287.5	307.3	394674.0	3.72	3.42	W840X359	
91-1755	IZ	169.2	69.1	98.8	102.8	106.8	1658.4	12.2	11.22	W14X500	D2
		9095.1	1754.6	482.5	502.0	521.5	226468.1	3.72	3.42	W360X744	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
91-1687	IZ	169.6	66.4	63.4	67.6	71.7	2484.4	12.2	11.22	W27X281	D2
		9119.9	1686.6	309.8	330.0	350.3	339260.7	3.72	3.42	W690X419	
91-1856	IZ	169.6	73.1	59.3	63.1	66.8	2715.0	12.2	11.22	W30X292	D1
		9120.7	1856.0	289.5	307.9	326.4	370756.5	3.72	3.42	W760X434	
91-1771	IZ	169.7	69.7	52.3	56.2	60.2	3366.8	12.2	11.22	W40X235	D1
		9122.3	1771.0	255.1	274.4	293.7	459764.9	3.72	3.42	W1000X350	
92-1904	IZ	170.1	75.0	61.2	65.1	69.1	2518.7	12.2	11.22	W27X307	C2
		9147.5	1904.0	298.6	318.0	337.4	343947.1	3.72	3.42	W690X457	
92-1708	IZ	170.3	67.2	59.0	63.1	67.2	2691.2	12.2	11.22	W30X261	D2
		9153.3	1707.6	288.0	308.0	328.1	367504.2	3.72	3.42	W760X389	
92-2083	IZ	170.8	82.0	47.4	51.0	54.7	3362.6	12.2	11.22	W40X249	C1
		9183.8	2083.4	231.4	249.2	266.9	459189.4	3.72	3.42	W1000X371	
92-1889	IZ	171.1	74.4	53.1	56.8	60.5	3101.3	12.2	11.22	W36X260	D1
		9196.9	1889.0	259.1	277.2	295.3	423516.2	3.72	3.42	W920X387	
92-1985	IZ	171.2	78.2	51.8	57.1	62.3	3396.5	13.32	12.27	W40X235	C3
		9202.7	1985.4	252.9	278.6	304.3	463817.5	4.06	3.74	W1000X350	
92-1974	IZ	171.2	77.7	96.2	100.0	103.9	1732.1	12.2	11.22	W14X550	C2
		9203.6	1974.0	469.8	488.5	507.2	236532.1	3.72	3.42	W360X818	
92-1901	IZ	171.3	74.8	95.7	100.9	106.1	1678.9	13.32	12.27	W14X500	D3
		9207.4	1901.0	467.5	492.8	518.1	229264.1	4.06	3.74	W360X744	
92-1779	IZ	171.7	70.0	55.7	59.7	63.6	3213.6	12.2	11.22	W36X256	D1
		9229.1	1779.0	272.1	291.3	310.5	438845.7	3.72	3.42	W920X381	
92-1623	IZ	171.9	63.9	52.6	56.9	61.2	3383.3	12.2	11.22	W40X211	D2
		9240.3	1622.6	256.7	277.7	298.8	462015.5	3.72	3.42	W1000X314	
92-2070	IZ	172.0	81.5	58.1	63.2	68.2	2752.0	13.32	12.27	W30X292	C3
		9244.9	2070.4	283.9	308.5	333.1	375805.2	4.06	3.74	W760X434	
93-2087	IZ	172.3	82.2	53.5	57.1	60.7	3000.8	12.2	11.22	W33X291	C1
		9260.7	2087.4	261.1	278.8	296.5	409788.0	3.72	3.42	W840X433	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
93-2103	IZ	172.5	82.8	52.6	57.5	62.5	3126.6	13.32	12.27	W36X260	C3
		9271.7	2103.4	256.7	280.9	305.1	426960.5	4.06	3.74	W920X387	
93-2120	IZ	172.5	83.5	93.6	98.5	103.5	1745.4	13.32	12.27	W14X550	C3
		9274.1	2120.4	457.1	481.1	505.2	238343.9	4.06	3.74	W360X818	
93-1993	IZ	173.1	78.5	54.9	60.1	65.4	3241.4	13.32	12.27	W36X256	C3
		9309.0	1993.4	268.1	293.6	319.2	442640.9	4.06	3.74	W920X381	
93-1938	IZ	173.3	76.3	53.2	57.1	61.0	2991.6	12.2	11.22	W33X263	C2
		9316.5	1938.0	259.7	278.8	297.9	408529.9	3.72	3.42	W840X392	
93-1888	IZ	173.4	74.3	55.3	60.5	65.7	3126.6	13.32	12.27	W36X245	D3
		9322.2	1888.0	269.8	295.3	320.8	426958.4	4.06	3.74	W920X365	
94-2105	IZ	173.9	82.9	51.4	55.0	58.6	3176.0	12.2	11.22	W36X280	C1
		9347.2	2105.4	251.0	268.6	286.1	433708.1	3.72	3.42	W920X417	
94-1723	IZ	174.9	67.8	50.4	54.4	58.5	3409.4	12.2	11.22	W40X215	D2
		9405.8	1722.6	245.9	265.7	285.5	465586.4	3.72	3.42	W1000X321	
94-1631	IZ	174.9	64.2	56.2	60.5	64.7	3247.6	12.2	11.22	W36X232	D2
		9405.9	1630.6	274.2	295.2	316.1	443486.2	3.72	3.42	W920X345	
94-2073	IZ	175.6	81.6	58.9	62.5	66.2	2844.9	12.2	11.22	W30X326	C1
		9441.0	2073.4	287.5	305.3	323.1	388498.7	3.72	3.42	W760X484	
95-1924	IZ	175.9	75.7	58.1	62.0	66.0	2814.9	12.2	11.22	W30X292	C2
		9456.5	1924.0	283.7	302.9	322.1	384405.9	3.72	3.42	W760X434	
95-1986	IZ	175.9	78.2	51.9	55.7	59.5	3518.0	12.2	11.22	W40X264	C1
		9456.9	1986.4	253.4	272.0	290.6	480409.6	3.72	3.42	W1000X393	
95-1816	IZ	176.8	71.5	73.7	77.6	81.4	2474.3	12.2	11.22	W24X370	D1
		9504.4	1816.0	359.9	378.7	397.5	337880.9	3.72	3.42	W610X551	
95-1839	IZ	177.1	72.4	51.3	55.4	59.5	3513.7	12.2	11.22	W40X235	C2
		9520.3	1839.0	250.3	270.4	290.5	479822.4	3.72	3.42	W1000X350	
95-1869	IZ	177.2	73.6	48.8	52.6	56.3	3802.2	12.2	11.22	W44X230	D1
		9526.9	1869.0	238.4	256.7	274.9	519218.4	3.72	3.42	W1100X343	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
95-1957	IZ	177.4	77.0	52.1	56.0	59.8	3216.5	12.2	11.22	W36X260	C2
		9538.4	1957.0	254.4	273.3	292.2	439243.1	3.72	3.42	W920X387	
96-1812	IZ	177.5	71.3	72.7	78.1	83.6	2442.9	13.32	12.27	W24X335	D3
		9545.1	1812.0	354.8	381.4	408.0	333600.5	4.06	3.74	W610X498	
96-2083	IZ	177.6	82.0	48.7	53.8	58.8	3810.5	13.32	12.27	W44X230	C3
		9547.8	2083.4	238.0	262.5	286.9	520356.5	4.06	3.74	W1100X343	
96-1839	IZ	177.6	72.4	67.2	71.0	74.8	2664.4	12.2	11.22	W27X336	D1
		9549.8	1839.0	328.1	346.7	365.2	363848.8	3.72	3.42	W690X500	
96-1836	IZ	178.1	72.3	67.2	72.5	77.9	2636.5	13.32	12.27	W27X307	D3
		9575.4	1836.0	327.9	354.2	380.4	360036.1	4.06	3.74	W690X457	
96-1847	IZ	178.7	72.7	54.6	58.7	62.8	3345.8	12.2	11.22	W36X256	C2
		9608.8	1847.0	266.6	286.6	306.6	456897.9	3.72	3.42	W920X381	
96-1870	IZ	179.0	73.6	58.8	64.1	69.4	3089.8	13.32	12.27	W33X263	D3
		9622.5	1870.0	287.1	312.9	338.6	421945.4	4.06	3.74	W840X392	
96-1742	IZ	179.0	68.6	55.0	59.0	63.0	3227.6	12.2	11.22	W36X245	D2
		9623.6	1741.6	268.4	288.1	307.7	440760.1	3.72	3.42	W920X365	
97-2053	IZ	179.7	80.8	65.2	70.3	75.4	2696.2	13.32	12.27	W27X336	C3
		9663.8	2053.4	318.3	343.1	368.0	368192.5	4.06	3.74	W690X500	
97-2030	IZ	179.8	79.9	71.0	76.1	81.3	2516.0	13.32	12.27	W24X370	C3
		9664.7	2030.4	346.7	371.8	396.9	343578.3	4.06	3.74	W610X551	
97-1869	IZ	180.1	73.6	51.9	55.7	59.4	3544.8	12.2	11.22	W40X249	D1
		9681.3	1869.0	253.5	271.8	290.1	484067.1	3.72	3.42	W1000X371	
97-2083	IZ	180.4	82.0	51.5	56.5	61.5	3550.2	13.32	12.27	W40X249	C3
		9696.3	2083.4	251.6	276.0	300.5	484815.8	4.06	3.74	W1000X371	
97-1911	IZ	180.5	75.2	107.7	111.4	115.1	1886.5	12.2	11.22	W14X605	D1
		9703.3	1911.0	526.0	543.9	561.8	257622.7	3.72	3.42	W360X900	
97-2055	IZ	180.6	80.9	65.7	69.4	73.1	2744.7	12.2	11.22	W27X368	C1
		9710.0	2055.4	320.9	338.9	356.9	374807.8	3.72	3.42	W690X548	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
97-1771	IZ	180.8	69.7	57.1	62.7	68.2	3587.6	13.32	12.27	W40X235	D3
		9720.5	1771.0	278.8	306.0	333.2	489912.1	4.06	3.74	W1000X350	
97-1666	IZ	180.9	65.6	73.9	78.1	82.3	2488.5	12.2	11.22	W24X335	D2
		9723.2	1665.6	360.8	381.3	401.8	339826.0	3.72	3.42	W610X498	
98-1690	IZ	182.3	66.5	67.9	72.0	76.2	2698.2	12.2	11.22	W27X307	D2
		9799.6	1689.6	331.5	351.7	372.0	368463.9	3.72	3.42	W690X457	
98-1873	IZ	182.5	73.7	58.7	62.4	66.2	3178.9	12.2	11.22	W33X291	D1
		9810.4	1873.0	286.5	304.7	323.0	434111.7	3.72	3.42	W840X433	
98-1889	IZ	182.5	74.4	57.6	62.8	68.1	3308.3	13.32	12.27	W36X260	D3
		9810.6	1889.0	281.3	306.8	332.3	451780.2	4.06	3.74	W920X387	
98-1856	IZ	182.8	73.1	63.9	69.2	74.6	2925.6	13.32	12.27	W30X292	D3
		9828.4	1856.0	312.1	338.1	364.0	399523.0	4.06	3.74	W760X434	
98-2087	IZ	183.0	82.2	57.6	62.6	67.6	3188.1	13.32	12.27	W33X291	C3
		9838.8	2087.4	281.2	305.6	330.0	435365.2	4.06	3.74	W840X433	
98-1884	IZ	183.0	74.2	72.0	76.0	80.0	2562.0	12.2	11.22	W24X370	C2
		9841.3	1884.0	351.4	371.0	390.6	349857.4	3.72	3.42	W610X551	
99-1987	IZ	183.4	78.2	54.1	58.0	61.8	3681.7	12.2	11.22	W40X278	C1
		9858.2	1987.4	264.4	283.0	301.6	502766.0	3.72	3.42	W1000X415	
99-1779	IZ	183.4	70.0	60.6	66.1	71.6	3433.4	13.32	12.27	W36X256	D3
		9860.3	1779.0	295.6	322.7	349.8	468857.3	4.06	3.74	W920X381	
99-1907	IZ	183.7	75.1	65.7	69.7	73.6	2755.5	12.2	11.22	W27X336	C2
		9876.3	1907.0	320.8	340.2	359.5	376285.5	3.72	3.42	W690X500	
99-1891	IZ	183.9	74.4	56.3	60.0	63.7	3359.2	12.2	11.22	W36X280	D1
		9886.4	1891.0	275.0	293.1	311.2	458728.6	3.72	3.42	W920X417	
99-2105	IZ	184.0	82.9	55.5	60.5	65.4	3361.7	13.32	12.27	W36X280	C3
		9893.7	2105.4	271.0	295.2	319.3	459066.7	4.06	3.74	W920X417	
99-1760	IZ	184.2	69.3	107.0	110.9	114.9	1863.6	12.2	11.22	W14X550	D2
		9902.2	1759.6	522.2	541.6	561.1	254485.3	3.72	3.42	W360X818	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
99-1937	IZ	184.2	76.3	48.0	51.9	55.8	3953.1	12.2	11.22	W44X230	C2
		9905.0	1937.0	234.4	253.4	272.5	539824.8	3.72	3.42	W1100X343	
99-2106	IZ	184.6	82.9	54.3	57.9	61.5	3390.2	12.2	11.22	W36X300	C1
		9924.0	2106.4	265.1	282.6	300.2	462956.5	3.72	3.42	W920X446	
99-1906	IZ	184.6	75.0	103.3	108.4	113.6	1868.2	13.32	12.27	W14X550	D3
		9926.9	1906.0	504.1	529.4	554.6	255121.9	4.06	3.74	W360X818	
99-1724	IZ	184.7	67.9	58.8	62.9	66.9	3188.8	12.2	11.22	W33X263	D2
		9930.8	1723.6	287.2	307.0	326.8	435465.4	3.72	3.42	W840X392	
99-2131	IZ	184.8	83.9	105.7	109.3	112.8	2000.7	12.2	11.22	W14X665	C1
		9935.0	2131.4	516.1	533.4	550.8	273213.3	3.72	3.42	W360X990	
100-1986	IZ	185.7	78.2	56.2	61.5	66.7	3714.8	13.32	12.27	W40X264	C3
		9986.0	1986.4	274.5	300.2	325.8	507287.4	4.06	3.74	W1000X393	
100-1772	IZ	185.9	69.8	57.2	61.2	65.1	3718.3	12.2	11.22	W40X264	D1
		9995.5	1772.0	279.3	298.6	317.9	507770.7	3.72	3.42	W1000X393	
100-2089	IZ	186.2	82.3	57.3	61.0	64.6	3273.4	12.2	11.22	W33X318	C1
		10011.5	2089.4	280.0	297.7	315.4	447011.6	3.72	3.42	W840X473	
100-1937	IZ	186.6	76.3	51.0	54.9	58.8	3673.1	12.2	11.22	W40X249	C2
		10032.0	1937.0	248.9	268.0	287.1	501597.9	3.72	3.42	W1000X371	
100-1859	IZ	186.6	73.2	64.7	68.5	72.3	3023.8	12.2	11.22	W30X326	D1
		10034.6	1859.0	316.1	334.5	352.9	412922.0	3.72	3.42	W760X484	
100-2125	IZ	186.7	83.7	101.7	106.6	111.5	1951.5	13.32	12.27	W14X605	C3
		10037.2	2125.4	496.7	520.6	544.6	266488.5	4.06	3.74	W360X900	
100-2085	IZ	186.8	82.1	51.4	55.0	58.6	3706.3	12.2	11.22	W40X277	C1
		10042.2	2085.4	250.8	268.5	286.3	506125.1	3.72	3.42	W1000X412	
101-1979	IZ	186.9	77.9	104.9	108.7	112.6	1953.5	12.2	11.22	W14X605	C2
		10047.6	1979.0	512.2	530.9	549.6	266763.3	3.72	3.42	W360X900	
101-1869	IZ	187.0	73.6	53.4	58.7	64.0	4011.3	13.32	12.27	W44X230	D3
		10051.1	1869.0	260.8	286.6	312.3	547784.8	4.06	3.74	W1100X343	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
101-2073	IZ	187.2	81.6	63.0	68.1	73.1	3033.5	13.32	12.27	W30X326	C3
		10066.8	2073.4	307.7	332.3	356.8	414248.7	4.06	3.74	W760X484	
101-1710	IZ	188.2	67.3	64.4	68.5	72.6	3011.4	12.2	11.22	W30X292	D2
		10116.4	1709.6	314.3	334.3	354.3	411233.6	3.72	3.42	W760X434	
101-1625	IZ	188.4	64.0	57.0	61.3	65.6	3737.4	12.2	11.22	W40X235	D2
		10126.6	1624.6	278.1	299.1	320.2	510380.9	3.72	3.42	W1000X350	
101-1941	IZ	188.5	76.4	57.5	61.4	65.3	3283.4	12.2	11.22	W33X291	C2
		10132.9	1941.0	280.8	299.8	318.9	448383.0	3.72	3.42	W840X433	
102-1743	IZ	188.9	68.6	57.5	61.5	65.6	3424.6	12.2	11.22	W36X260	D2
		10155.5	1742.6	280.9	300.5	320.1	467659.3	3.72	3.42	W920X387	
102-1959	IZ	189.9	77.1	55.3	59.1	63.0	3469.1	12.2	11.22	W36X280	C2
		10209.8	1959.0	269.8	288.7	307.5	473736.1	3.72	3.42	W920X417	
102-2076	IZ	190.4	81.7	63.4	67.0	70.7	3122.4	12.2	11.22	W30X357	C1
		10237.6	2076.4	309.4	327.2	345.0	426397.4	3.72	3.42	W760X531	
103-1633	IZ	190.6	64.3	60.7	65.0	69.3	3568.7	12.2	11.22	W36X256	D2
		10249.0	1632.6	296.5	317.4	338.3	487337.7	3.72	3.42	W920X381	
103-1869	IZ	190.7	73.6	56.5	61.8	67.1	3753.9	13.32	12.27	W40X249	D3
		10252.7	1869.0	275.9	301.7	327.5	512633.5	4.06	3.74	W1000X371	
103-2083	IZ	190.9	82.0	49.3	53.0	56.6	4134.1	12.2	11.22	W44X262	C1
		10264.4	2083.4	240.9	258.6	276.4	564543.4	3.72	3.42	W1100X390	
103-1839	IZ	191.8	72.4	71.9	77.2	82.6	2877.0	13.32	12.27	W27X336	D3
		10311.8	1839.0	350.9	377.1	403.2	392881.2	4.06	3.74	W690X500	
103-1816	IZ	192.2	71.5	78.4	83.9	89.3	2689.5	13.32	12.27	W24X370	D3
		10331.4	1816.0	383.0	409.5	436.0	367281.1	4.06	3.74	W610X551	
104-1927	IZ	192.4	75.9	63.4	67.3	71.2	3117.8	12.2	11.22	W30X326	C2
		10346.5	1927.0	309.3	328.5	347.7	425756.7	3.72	3.42	W760X484	
104-1841	IZ	192.5	72.5	72.4	76.2	80.1	2925.9	12.2	11.22	W27X368	D1
		10351.1	1841.0	353.7	372.3	390.8	399552.3	3.72	3.42	W690X548	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
104-1840	IZ	192.9	72.4	56.0	60.1	64.3	3857.3	12.2	11.22	W40X264	C2
		10368.9	1840.0	273.6	293.7	313.8	526742.2	3.72	3.42	W1000X393	
104-2055	IZ	193.1	80.9	69.9	75.0	80.1	2934.9	13.32	12.27	W27X368	C3
		10383.0	2055.4	341.3	366.1	390.9	400783.2	4.06	3.74	W690X548	
104-1987	IZ	193.2	78.2	58.5	63.7	69.0	3878.4	13.32	12.27	W40X278	C3
		10384.9	1987.4	285.5	311.1	336.7	529630.2	4.06	3.74	W1000X415	
104-1773	IZ	194.2	69.8	59.7	63.7	67.6	3899.0	12.2	11.22	W40X278	D1
		10440.0	1773.0	291.6	310.9	330.1	532439.0	3.72	3.42	W1000X415	
105-1873	IZ	194.5	73.7	63.3	68.5	73.8	3387.7	13.32	12.27	W33X291	D3
		10454.6	1873.0	308.9	334.6	360.3	462617.1	4.06	3.74	W840X433	
105-2106	IZ	194.7	82.9	58.4	63.3	68.3	3575.8	13.32	12.27	W36X300	C3
		10467.4	2106.4	285.0	309.2	333.4	488303.0	4.06	3.74	W920X446	
105-1891	IZ	195.2	74.4	60.9	66.1	71.3	3566.0	13.32	12.27	W36X280	D3
		10494.9	1891.0	297.2	322.7	348.2	486962.6	4.06	3.74	W920X417	
105-1723	IZ	195.2	67.8	53.0	57.0	61.1	4188.7	12.2	11.22	W44X230	D2
		10495.6	1722.6	258.6	278.5	298.3	572007.6	3.72	3.42	W1100X343	
105-1892	IZ	195.7	74.5	59.5	63.2	66.9	3594.5	12.2	11.22	W36X300	D1
		10522.3	1892.0	290.7	308.7	326.8	490864.0	3.72	3.42	W920X446	
105-2085	IZ	196.1	82.1	54.4	58.0	61.6	3906.1	12.2	11.22	W40X297	C1
		10541.7	2085.4	265.5	283.2	300.9	533412.2	3.72	3.42	W1000X443	
106-2085	IZ	196.2	82.1	55.5	60.5	65.5	3893.8	13.32	12.27	W40X277	C3
		10550.1	2085.4	270.9	295.3	319.8	531726.9	4.06	3.74	W1000X412	
106-2089	IZ	196.9	82.3	61.5	66.5	71.4	3460.5	13.32	12.27	W33X318	C3
		10583.7	2089.4	300.1	324.5	348.8	472564.4	4.06	3.74	W840X473	
106-1772	IZ	196.9	69.8	62.1	67.6	73.2	3939.0	13.32	12.27	W40X264	D3
		10588.6	1772.0	303.0	330.2	357.4	537900.9	4.06	3.74	W1000X393	
106-1670	IZ	197.0	65.7	80.2	84.4	88.6	2756.7	12.2	11.22	W24X370	D2
		10589.2	1669.6	391.5	411.9	432.4	376445.0	3.72	3.42	W610X551	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
106-1693	IZ	197.3	66.6	73.0	77.1	81.3	2959.4	12.2	11.22	W27X336	D2
		10607.2	1692.6	356.5	376.6	396.8	404135.0	3.72	3.42	W690X500	
106-1917	IZ	197.5	75.5	116.6	120.3	123.9	2138.7	12.2	11.22	W14X665	D1
		10620.5	1917.0	569.4	587.3	605.1	292063.3	3.72	3.42	W360X990	
106-1871	IZ	197.7	73.7	56.3	60.1	63.8	3922.7	12.2	11.22	W40X277	D1
		10628.4	1871.0	275.1	293.3	311.6	535673.6	3.72	3.42	W1000X412	
106-1875	IZ	197.9	73.8	63.0	66.7	70.5	3478.0	12.2	11.22	W33X318	D1
		10637.1	1875.0	307.5	325.8	344.0	474947.3	3.72	3.42	W840X473	
107-1909	IZ	198.2	75.2	70.8	74.7	78.7	3012.4	12.2	11.22	W27X368	C2
		10657.2	1909.0	345.5	364.9	384.3	411367.1	3.72	3.42	W690X548	
107-1723	IZ	198.6	67.8	56.3	60.4	64.5	3909.4	12.2	11.22	W40X249	D2
		10677.4	1722.6	275.0	294.9	314.7	533868.9	3.72	3.42	W1000X371	
107-2083	IZ	199.6	82.0	53.5	58.5	63.5	4321.7	13.32	12.27	W44X262	C3
		10730.4	2083.4	261.0	285.5	309.9	590169.8	4.06	3.74	W1100X390	
107-1859	IZ	199.6	73.2	69.4	74.7	80.0	3234.1	13.32	12.27	W30X326	D3
		10732.5	1859.0	338.7	364.6	390.5	441642.1	4.06	3.74	W760X484	
108-2105	IZ	200.0	82.9	58.3	61.9	65.5	3707.9	12.2	11.22	W36X328	C1
		10750.5	2105.4	284.6	302.1	319.7	506346.5	3.72	3.42	W920X488	
108-1911	IZ	200.1	75.2	112.2	117.4	122.6	2091.1	13.32	12.27	W14X605	D3
		10755.6	1911.0	548.0	573.2	598.4	285561.2	4.06	3.74	W360X900	
108-1841	IZ	200.9	72.5	58.4	62.6	66.7	4033.8	12.2	11.22	W40X278	C2
		10801.0	1841.0	285.4	305.5	325.5	550851.2	3.72	3.42	W1000X415	
108-1765	IZ	201.4	69.5	116.7	120.6	124.6	2105.0	12.2	11.22	W14X605	D2
		10826.8	1764.6	569.7	589.0	608.4	287451.9	3.72	3.42	W360X900	
108-1960	IZ	201.4	77.2	58.3	62.2	66.1	3699.1	12.2	11.22	W36X300	C2
		10828.5	1960.0	284.9	303.7	322.6	505148.7	3.72	3.42	W920X446	
108-1727	IZ	201.6	68.0	63.7	67.7	71.8	3511.8	12.2	11.22	W33X291	D2
		10837.6	1726.6	310.8	330.6	350.4	479562.3	3.72	3.42	W840X433	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
108-1869	IZ	201.6	73.6	54.1	57.8	61.6	4365.1	12.2	11.22	W44X262	D1
		10838.1	1869.0	264.0	282.3	300.6	596098.1	3.72	3.42	W1100X390	
109-2131	IZ	201.7	83.9	109.7	114.6	119.5	2184.1	13.32	12.27	W14X665	C3
		10845.9	2131.4	535.8	559.7	583.6	298262.6	4.06	3.74	W360X990	
109-2076	IZ	201.9	81.7	67.5	72.5	77.5	3310.7	13.32	12.27	W30X357	C3
		10855.0	2076.4	329.6	354.1	378.6	452110.2	4.06	3.74	W760X531	
109-1745	IZ	202.7	68.7	61.1	65.1	69.1	3703.7	12.2	11.22	W36X280	D2
		10900.3	1744.6	298.1	317.7	337.3	505776.0	3.72	3.42	W920X417	
109-1862	IZ	202.9	73.3	69.7	73.5	77.2	3327.7	12.2	11.22	W30X357	D1
		10910.8	1862.0	340.5	358.8	377.2	454432.8	3.72	3.42	W760X531	
109-2137	IZ	203.0	84.1	114.4	118.0	121.5	2274.0	12.2	11.22	W14X730	C1
		10915.0	2137.4	558.7	576.0	593.3	310531.1	3.72	3.42	W360X1086	
109-1943	IZ	203.4	76.5	61.7	65.6	69.5	3576.3	12.2	11.22	W33X318	C2
		10937.8	1943.0	301.1	320.1	339.1	488371.6	3.72	3.42	W840X473	
109-1985	IZ	203.5	78.1	113.5	117.3	121.1	2203.3	12.2	11.22	W14X665	C2
		10941.1	1985.0	554.2	572.8	591.4	300880.1	3.72	3.42	W360X990	
110-1939	IZ	203.7	76.3	55.2	59.2	63.1	4042.5	12.2	11.22	W40X277	C2
		10953.0	1939.0	269.7	288.8	307.9	552033.7	3.72	3.42	W1000X412	
110-2092	IZ	204.2	82.4	62.5	66.1	69.7	3629.2	12.2	11.22	W33X354	C1
		10976.8	2092.4	305.1	322.8	340.4	495602.8	3.72	3.42	W840X527	
110-1773	IZ	205.2	69.8	64.6	70.1	75.7	4119.5	13.32	12.27	W40X278	D3
		11030.4	1773.0	315.2	342.4	369.6	562552.2	4.06	3.74	W1000X415	
111-2085	IZ	205.5	82.1	58.5	63.5	68.5	4093.6	13.32	12.27	W40X297	C3
		11047.7	2085.4	285.6	310.0	334.5	559014.0	4.06	3.74	W1000X443	
111-1626	IZ	206.0	64.0	62.4	66.7	71.0	4120.4	12.2	11.22	W40X264	D2
		11076.4	1625.6	304.5	325.5	346.5	562679.0	3.72	3.42	W1000X393	
111-2079	IZ	206.1	81.9	68.4	72.0	75.7	3420.4	12.2	11.22	W30X391	C1
		11081.4	2079.4	333.8	351.6	369.4	467082.8	3.72	3.42	W760X582	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
111-1841	IZ	206.5	72.5	77.1	82.5	87.8	3138.2	13.32	12.27	W27X368	D3
		11102.4	1841.0	376.5	402.7	428.8	428553.2	4.06	3.74	W690X548	
111-1713	IZ	206.5	67.4	70.3	74.4	78.4	3346.0	12.2	11.22	W30X326	D2
		11104.1	1712.6	343.1	363.1	383.0	456932.7	3.72	3.42	W760X484	
111-1892	IZ	207.0	74.5	64.1	69.3	74.5	3801.2	13.32	12.27	W36X300	D3
		11127.2	1892.0	312.8	338.3	363.7	519083.1	4.06	3.74	W920X446	
112-1937	IZ	208.0	76.3	53.1	57.0	60.9	4502.9	12.2	11.22	W44X262	C2
		11180.3	1937.0	259.1	278.2	297.2	614914.7	3.72	3.42	W1100X390	
112-1871	IZ	208.0	73.7	59.7	63.4	67.2	4142.9	12.2	11.22	W40X297	D1
		11180.8	1871.0	291.4	309.7	327.9	565748.1	3.72	3.42	W1000X443	
112-1871	IZ	208.2	73.7	60.9	66.2	71.5	4131.6	13.32	12.27	W40X277	D3
		11194.6	1871.0	297.5	323.2	348.9	564209.5	4.06	3.74	W1000X412	
112-1930	IZ	208.3	76.0	68.2	72.1	76.0	3415.9	12.2	11.22	W30X357	C2
		11199.8	1930.0	332.8	352.0	371.1	466472.3	3.72	3.42	W760X531	
112-2085	IZ	209.0	82.1	53.5	57.2	60.8	4558.4	12.2	11.22	W44X290	C1
		11236.3	2085.4	261.3	279.1	296.8	622492.0	3.72	3.42	W1100X433	
113-1875	IZ	209.7	73.8	67.6	72.8	78.1	3686.5	13.32	12.27	W33X318	D3
		11274.9	1875.0	329.9	355.6	381.3	503422.3	4.06	3.74	W840X473	
113-2105	IZ	210.0	82.9	62.4	67.3	72.3	3893.6	13.32	12.27	W36X328	C3
		11288.9	2105.4	304.5	328.7	352.9	531705.2	4.06	3.74	W920X488	
114-1991	IZ	211.1	78.4	61.4	65.2	69.0	4305.6	12.2	11.22	W40X327	C1
		11350.7	1991.4	299.7	318.3	336.8	587967.4	3.72	3.42	W1000X486	
114-1869	IZ	211.3	73.6	58.7	63.9	69.2	4574.3	13.32	12.27	W44X262	D3
		11357.5	1869.0	286.4	312.2	338.0	624664.5	4.06	3.74	W1100X390	
114-1891	IZ	212.6	74.4	64.0	67.7	71.4	3943.2	12.2	11.22	W36X328	D1
		11432.7	1891.0	312.4	330.5	348.5	538482.0	3.72	3.42	W920X488	
114-2087	IZ	212.7	82.2	58.3	61.9	65.5	4270.1	12.2	11.22	W40X324	C1
		11433.7	2087.4	284.4	302.1	319.8	583116.4	3.72	3.42	W1000X483	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
114-1992	IZ	212.8	78.4	62.2	66.0	69.8	4340.2	12.2	11.22	W40X331	C1
		11441.9	1992.4	303.5	322.0	340.6	592691.4	3.72	3.42	W1000X494	
115-1695	IZ	213.4	66.7	78.7	82.8	87.0	3243.1	12.2	11.22	W27X368	D2
		11473.5	1694.6	384.3	404.4	424.6	442875.4	3.72	3.42	W690X548	
115-1939	IZ	213.7	76.3	58.5	62.4	66.3	4257.4	12.2	11.22	W40X297	C2
		11489.7	1939.0	285.5	304.6	323.7	581381.0	3.72	3.42	W1000X443	
115-2092	IZ	214.7	82.4	66.6	71.6	76.6	3816.1	13.32	12.27	W33X354	C3
		11541.9	2092.4	325.2	349.5	373.9	521118.9	4.06	3.74	W840X527	
116-1627	IZ	215.0	64.0	65.1	69.4	73.7	4317.1	12.2	11.22	W40X278	D2
		11559.5	1626.6	317.8	338.8	359.8	589533.7	3.72	3.42	W1000X415	
116-1746	IZ	215.5	68.7	64.5	68.5	72.5	3958.6	12.2	11.22	W36X300	D2
		11588.0	1745.6	315.0	334.6	354.2	540579.6	3.72	3.42	W920X446	
116-1862	IZ	215.7	73.3	74.3	79.6	84.9	3537.7	13.32	12.27	W30X357	D3
		11599.2	1862.0	363.0	388.8	414.7	483106.6	4.06	3.74	W760X531	
116-2108	IZ	215.8	83.0	62.6	66.2	69.8	4035.0	12.2	11.22	W36X359	C1
		11600.3	2108.4	305.8	323.3	340.8	551013.8	3.72	3.42	W920X534	
116-1917	IZ	216.4	75.5	121.1	126.3	131.4	2342.7	13.32	12.27	W14X665	D3
		11633.3	1917.0	591.3	616.4	641.5	319914.4	4.06	3.74	W360X990	
117-1923	IZ	217.4	75.7	126.3	129.9	133.6	2434.9	12.2	11.22	W14X730	D1
		11687.4	1923.0	616.6	634.4	652.2	332505.6	3.72	3.42	W360X1086	
117-2079	IZ	217.4	81.9	72.5	77.5	82.5	3608.4	13.32	12.27	W30X391	C3
		11690.6	2079.4	354.0	378.5	403.0	492758.5	4.06	3.74	W760X582	
117-2085	IZ	217.6	82.1	57.6	62.7	67.7	4745.9	13.32	12.27	W44X290	C3
		11698.4	2085.4	281.5	305.9	330.3	648093.8	4.06	3.74	W1100X433	
117-1878	IZ	217.6	73.9	68.7	72.4	76.2	3868.4	12.2	11.22	W33X354	D1
		11700.1	1878.0	335.5	353.7	371.9	528261.7	3.72	3.42	W840X527	
117-1725	IZ	217.7	67.9	61.1	65.2	69.2	4319.0	12.2	11.22	W40X277	D2
		11702.4	1724.6	298.4	318.2	338.0	589798.5	3.72	3.42	W1000X412	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
117-1959	IZ	217.9	77.1	62.6	66.5	70.4	4040.8	12.2	11.22	W36X328	C2
		11715.6	1959.0	305.9	324.7	343.6	551803.0	3.72	3.42	W920X488	
117-1729	IZ	218.2	68.1	68.3	72.4	76.4	3835.7	12.2	11.22	W33X318	D2
		11731.3	1728.6	333.6	353.3	373.1	523803.8	3.72	3.42	W840X473	
117-2154	IZ	218.3	84.8	124.7	128.2	131.8	2492.0	12.2	11.22	W14X808	C1
		11734.7	2154.4	609.0	626.1	643.3	340306.5	3.72	3.42	W360X1202	
117-1871	IZ	218.5	73.7	64.3	69.5	74.8	4351.9	13.32	12.27	W40X297	D3
		11744.7	1871.0	313.8	339.6	365.3	594284.0	4.06	3.74	W1000X443	
118-2137	IZ	219.3	84.1	118.5	123.3	128.2	2456.9	13.32	12.27	W14X730	C3
		11793.0	2137.4	578.3	602.2	626.0	335510.0	4.06	3.74	W360X1086	
118-1771	IZ	219.6	69.7	126.3	130.2	134.2	2377.3	12.2	11.22	W14X665	D2
		11805.1	1770.6	616.5	635.8	655.1	324639.1	3.72	3.42	W360X990	
118-1865	IZ	220.2	73.4	75.3	79.1	82.8	3654.2	12.2	11.22	W30X391	D1
		11839.0	1865.0	367.7	386.0	404.3	499012.5	3.72	3.42	W760X582	
119-2094	IZ	220.6	82.5	67.3	70.9	74.5	3965.0	12.2	11.22	W33X387	C1
		11861.1	2094.4	328.4	346.1	363.7	541460.3	3.72	3.42	W840X576	
119-1991	IZ	220.8	78.4	65.7	70.9	76.2	4501.9	13.32	12.27	W40X327	C3
		11868.3	1991.4	320.8	346.3	371.9	614777.7	4.06	3.74	W1000X486	
119-1871	IZ	221.6	73.7	58.7	62.5	66.2	4832.3	12.2	11.22	W44X290	D1
		11911.5	1871.0	286.8	305.1	323.3	659899.3	3.72	3.42	W1100X433	
119-1723	IZ	221.7	67.8	58.7	62.7	66.8	4799.6	12.2	11.22	W44X262	D2
		11916.8	1722.6	286.4	306.3	326.1	655421.3	3.72	3.42	W1100X390	
119-2087	IZ	222.0	82.2	62.4	67.4	72.4	4457.4	13.32	12.27	W40X324	C3
		11935.2	2087.4	304.5	328.9	353.3	608693.6	4.06	3.74	W1000X483	
120-1992	IZ	222.4	78.4	66.5	71.7	76.9	4536.4	13.32	12.27	W40X331	C3
		11959.2	1992.4	324.5	350.1	375.7	619488.2	4.06	3.74	W1000X494	
120-1946	IZ	222.7	76.6	67.2	71.1	75.0	3958.4	12.2	11.22	W33X354	C2
		11972.4	1946.0	328.1	347.1	366.1	540554.6	3.72	3.42	W840X527	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
120-1991	IZ	222.8	78.4	122.8	126.7	130.5	2496.1	12.2	11.22	W14X730	C2
		11981.0	1991.0	599.8	618.4	636.9	340858.4	3.72	3.42	W360X1086	
120-1891	IZ	223.8	74.4	68.5	73.7	79.0	4150.0	13.32	12.27	W36X328	D3
		12032.2	1891.0	334.6	360.1	385.5	566716.1	4.06	3.74	W920X488	
121-1716	IZ	224.1	67.5	75.7	79.8	83.8	3675.4	12.2	11.22	W30X357	D2
		12050.6	1715.6	369.5	389.4	409.3	501908.9	3.72	3.42	W760X531	
121-1777	IZ	224.9	70.0	67.8	71.8	75.7	4586.7	12.2	11.22	W40X327	D1
		12091.8	1777.0	331.1	350.4	369.6	626356.9	3.72	3.42	W1000X486	
121-1933	IZ	225.1	76.1	73.6	77.5	81.4	3735.9	12.2	11.22	W30X391	C2
		12103.8	1933.0	359.1	378.2	397.4	510176.9	3.72	3.42	W760X582	
121-2108	IZ	225.7	83.0	66.7	71.7	76.6	4220.4	13.32	12.27	W36X359	C3
		12133.4	2108.4	325.7	349.8	374.0	576336.3	4.06	3.74	W920X534	
122-1873	IZ	226.3	73.7	64.0	67.7	71.5	4543.1	12.2	11.22	W40X324	D1
		12164.8	1873.0	312.5	330.7	349.0	620403.8	3.72	3.42	W1000X483	
122-1778	IZ	226.8	70.0	68.7	72.6	76.6	4625.4	12.2	11.22	W40X331	D1
		12193.8	1778.0	335.4	354.6	373.8	631636.3	3.72	3.42	W1000X494	
122-1939	IZ	227.4	76.3	57.6	61.5	65.4	4958.9	12.2	11.22	W44X290	C2
		12223.6	1939.0	281.1	300.1	319.2	677186.6	3.72	3.42	W1100X433	
123-1725	IZ	228.8	67.9	64.8	68.8	72.9	4557.9	12.2	11.22	W40X297	D2
		12300.9	1724.6	316.2	336.0	355.8	622426.0	3.72	3.42	W1000X443	
123-1878	IZ	229.3	73.9	73.3	78.5	83.8	4076.6	13.32	12.27	W33X354	D3
		12329.8	1878.0	357.8	383.4	409.1	556691.2	4.06	3.74	W840X527	
124-1894	IZ	230.1	74.6	68.8	72.5	76.2	4302.2	12.2	11.22	W36X359	D1
		12368.5	1894.0	336.0	354.0	372.0	587503.9	3.72	3.42	W920X534	
124-1845	IZ	230.8	72.6	66.3	70.4	74.5	4706.5	12.2	11.22	W40X327	C2
		12407.5	1845.0	323.5	343.5	363.5	642709.1	3.72	3.42	W1000X486	
124-2094	IZ	231.0	82.5	71.4	76.4	81.3	4151.7	13.32	12.27	W33X387	C3
		12419.5	2094.4	348.5	372.8	397.1	566952.1	4.06	3.74	W840X576	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
124-1871	IZ	231.1	73.7	63.3	68.6	73.9	5041.3	13.32	12.27	W44X290	D3
		12426.6	1871.0	309.2	335.0	360.7	688435.2	4.06	3.74	W1100X433	
125-1941	IZ	231.5	76.4	62.6	66.5	70.4	4648.4	12.2	11.22	W40X324	C2
		12446.8	1941.0	305.9	324.9	343.9	634784.7	3.72	3.42	W1000X483	
125-1846	IZ	232.6	72.7	67.1	71.2	75.3	4743.6	12.2	11.22	W40X331	C2
		12505.4	1846.0	327.6	347.6	367.6	647778.1	3.72	3.42	W1000X494	
125-2088	IZ	232.7	82.2	59.7	63.3	66.9	5121.6	12.2	11.22	W44X335	C1
		12511.7	2088.4	291.4	309.1	326.8	699403.2	3.72	3.42	W1100X499	
125-1865	IZ	232.8	73.4	79.9	85.2	90.5	3863.8	13.32	12.27	W30X391	D3
		12518.2	1865.0	390.2	416.0	441.8	527640.2	4.06	3.74	W760X582	
125-2090	IZ	233.2	82.3	63.7	67.3	70.9	4727.4	12.2	11.22	W40X362	C1
		12535.3	2090.4	311.0	328.7	346.4	645566.0	3.72	3.42	W1000X539	
126-1745	IZ	233.9	68.7	69.4	73.4	77.4	4336.8	12.2	11.22	W36X328	D2
		12573.7	1744.6	338.6	358.2	377.8	592222.1	3.72	3.42	W920X488	
126-2110	IZ	233.9	83.1	67.6	71.2	74.8	4420.3	12.2	11.22	W36X393	C1
		12575.6	2110.4	330.0	347.6	365.1	603628.1	3.72	3.42	W920X585	
126-1940	IZ	234.0	76.4	137.6	141.2	144.8	2671.6	12.2	11.22	W14X808	D1
		12580.2	1940.0	671.9	689.5	707.2	364826.3	3.72	3.42	W360X1202	
126-2154	IZ	234.2	84.8	128.7	133.6	138.4	2673.5	13.32	12.27	W14X808	C3
		12589.3	2154.4	628.4	652.1	675.7	365088.4	4.06	3.74	W360X1202	
126-1962	IZ	234.8	77.2	67.3	71.2	75.0	4391.8	12.2	11.22	W36X359	C2
		12626.0	1962.0	328.6	347.4	366.3	599733.7	3.72	3.42	W920X534	
127-1923	IZ	235.5	75.7	130.8	135.9	141.0	2638.2	13.32	12.27	W14X730	D3
		12663.3	1923.0	638.5	663.5	688.5	360269.8	4.06	3.74	W360X1086	
127-1777	IZ	235.7	70.0	72.7	78.2	83.8	4806.7	13.32	12.27	W40X327	D3
		12671.9	1777.0	354.7	381.8	408.9	656402.3	4.06	3.74	W1000X486	
127-1880	IZ	235.7	74.0	74.0	77.7	81.5	4236.6	12.2	11.22	W33X387	D1
		12673.5	1880.0	361.4	379.6	397.8	578543.4	3.72	3.42	W840X576	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
127-1873	IZ	236.7	73.7	68.6	73.9	79.1	4751.9	13.32	12.27	W40X324	D3
		12723.7	1873.0	334.9	360.6	386.3	648909.2	4.06	3.74	W1000X483	
128-1778	IZ	237.6	70.0	73.5	79.1	84.6	4845.3	13.32	12.27	W40X331	D3
		12773.5	1778.0	358.9	386.0	413.1	661664.8	4.06	3.74	W1000X494	
128-2091	IZ	237.8	82.3	65.1	68.8	72.4	4831.8	12.2	11.22	W40X372	C1
		12787.3	2091.4	318.0	335.7	353.4	659822.5	3.72	3.42	W1000X554	
129-2008	IZ	238.9	79.1	133.8	137.6	141.4	2728.1	12.2	11.22	W14X808	C2
		12846.5	2008.0	653.4	671.8	690.2	372548.0	3.72	3.42	W360X1202	
129-1732	IZ	239.6	68.2	74.5	78.6	82.6	4258.5	12.2	11.22	W33X354	D2
		12880.2	1731.6	363.8	383.6	403.3	581541.1	3.72	3.42	W840X527	
129-1948	IZ	240.3	76.7	72.3	76.2	80.1	4319.1	12.2	11.22	W33X387	C2
		12920.3	1948.0	353.1	372.1	391.1	589812.4	3.72	3.42	W840X576	
130-1777	IZ	240.8	69.9	136.7	140.6	144.6	2697.0	12.2	11.22	W14X730	D2
		12945.7	1776.6	667.5	686.7	705.9	368304.1	3.72	3.42	W360X1086	
130-1894	IZ	241.1	74.6	73.3	78.6	83.8	4508.6	13.32	12.27	W36X359	D3
		12962.0	1894.0	358.1	383.5	408.9	615693.2	4.06	3.74	W920X534	
130-2088	IZ	241.2	82.2	63.8	68.8	73.8	5308.8	13.32	12.27	W44X335	C3
		12969.0	2088.4	311.5	335.9	360.3	724968.2	4.06	3.74	W1100X499	
130-2090	IZ	242.4	82.3	67.8	72.8	77.8	4914.4	13.32	12.27	W40X362	C3
		13031.2	2090.4	331.1	355.5	379.8	671106.6	4.06	3.74	W1000X539	
131-1719	IZ	242.8	67.7	81.7	85.8	89.9	4029.1	12.2	11.22	W30X391	D2
		13053.5	1718.6	399.0	418.9	438.8	550203.4	3.72	3.42	W760X582	
131-1725	IZ	243.3	67.9	63.7	67.8	71.8	5305.9	12.2	11.22	W44X290	D2
		13078.9	1724.6	311.1	331.0	350.8	724569.8	3.72	3.42	W1100X433	
131-2110	IZ	243.7	83.1	71.7	76.6	81.6	4605.5	13.32	12.27	W36X393	C3
		13102.6	2110.4	349.9	374.1	398.2	628926.7	4.06	3.74	W920X585	
133-2091	IZ	247.0	82.3	69.2	74.2	79.2	5018.7	13.32	12.27	W40X372	C3
		13282.0	2091.4	338.1	362.4	386.8	685350.8	4.06	3.74	W1000X554	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
133-1880	IZ	247.3	74.0	78.6	83.8	89.1	4444.5	13.32	12.27	W33X387	D3
		13295.6	1880.0	383.7	409.3	435.0	606942.7	4.06	3.74	W840X576	
133-1874	IZ	247.8	73.8	65.6	69.3	73.1	5452.6	12.2	11.22	W44X335	D1
		13320.3	1874.0	320.3	338.5	356.7	744607.3	3.72	3.42	W1100X499	
133-1997	IZ	247.9	78.6	71.3	75.1	78.8	5153.0	12.2	11.22	W40X392	C1
		13327.5	1997.4	347.9	366.4	384.9	703694.6	3.72	3.42	W1000X584	
134-1631	IZ	248.4	64.2	73.9	78.2	82.5	5065.5	12.2	11.22	W40X327	D2
		13354.1	1630.6	360.9	381.8	402.8	691743.9	3.72	3.42	W1000X486	
134-1727	IZ	248.6	68.0	69.4	73.5	77.5	4991.6	12.2	11.22	W40X324	D2
		13365.7	1726.6	339.0	358.8	378.5	681650.4	3.72	3.42	W1000X483	
134-1876	IZ	248.9	73.9	70.1	73.8	77.5	5045.8	12.2	11.22	W40X362	D1
		13379.5	1876.0	342.1	360.3	378.5	689045.5	3.72	3.42	W1000X539	
134-1896	IZ	250.0	74.6	74.3	78.0	81.7	4724.9	12.2	11.22	W36X393	D1
		13442.3	1896.0	362.9	380.9	399.0	645228.1	3.72	3.42	W920X585	
135-1632	IZ	250.4	64.2	74.8	79.1	83.4	5107.4	12.2	11.22	W40X331	D2
		13464.4	1631.6	365.4	386.4	407.3	697456.9	3.72	3.42	W1000X494	
135-1940	IZ	251.6	76.4	142.1	147.1	152.2	2873.1	13.32	12.27	W14X808	D3
		13529.2	1940.0	693.6	718.4	743.2	392347.2	4.06	3.74	W360X1202	
136-1748	IZ	252.7	68.8	74.6	78.6	82.6	4725.1	12.2	11.22	W36X359	D2
		13584.4	1747.6	364.1	383.6	403.2	645258.4	3.72	3.42	W920X534	
136-1942	IZ	252.8	76.5	64.2	68.1	72.0	5564.0	12.2	11.22	W44X335	C2
		13592.3	1942.0	313.4	332.4	351.4	759811.4	3.72	3.42	W1100X499	
136-2092	IZ	253.3	82.4	68.7	72.3	76.0	5185.9	12.2	11.22	W40X397	C1
		13619.0	2092.4	335.5	353.2	370.8	708185.6	3.72	3.42	W1000X591	
136-1944	IZ	253.5	76.5	68.5	72.4	76.3	5139.6	12.2	11.22	W40X362	C2
		13628.3	1944.0	334.5	353.5	372.5	701857.6	3.72	3.42	W1000X539	
137-2070	IZ	253.9	81.5	90.2	93.8	97.5	4127.8	12.2	11.22	W27X539	C1
		13648.7	2070.4	440.3	458.2	476.0	563692.2	3.72	3.42	W690X802	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
137-1877	IZ	254.0	73.9	71.7	75.4	79.1	5160.6	12.2	11.22	W40X372	D1
		13657.6	1877.0	349.9	368.1	386.3	704730.4	3.72	3.42	W1000X554	
137-1964	IZ	254.3	77.3	72.6	76.5	80.3	4805.4	12.2	11.22	W36X393	C2
		13671.3	1964.0	354.6	373.5	392.3	656220.4	3.72	3.42	W920X585	
138-1874	IZ	257.2	73.8	70.2	75.4	80.7	5661.3	13.32	12.27	W44X335	D3
		13830.0	1874.0	342.7	368.3	394.0	773097.5	4.06	3.74	W1100X499	
138-1997	IZ	257.3	78.6	75.6	80.8	86.0	5348.8	13.32	12.27	W40X392	C3
		13833.8	1997.4	368.9	394.4	419.9	730424.3	4.06	3.74	W1000X584	
139-2114	IZ	258.2	83.2	74.0	77.6	81.2	4940.4	12.2	11.22	W36X439	C1
		13881.8	2114.4	361.3	378.8	396.3	674656.2	3.72	3.42	W920X653	
139-1794	IZ	258.4	70.6	148.9	152.8	156.7	2950.5	12.2	11.22	W14X808	D2
		13893.9	1793.6	726.8	745.8	764.9	402923.7	3.72	3.42	W360X1202	
139-1945	IZ	258.5	76.6	70.0	73.9	77.8	5251.6	12.2	11.22	W40X372	C2
		13898.4	1945.0	342.0	361.0	380.0	717158.2	3.72	3.42	W1000X554	
139-1876	IZ	259.1	73.9	74.6	79.9	85.2	5254.2	13.32	12.27	W40X362	D3
		13932.1	1876.0	364.5	390.1	415.8	717505.3	4.06	3.74	W1000X539	
139-1734	IZ	259.1	68.3	80.3	84.3	88.3	4657.4	12.2	11.22	W33X387	D2
		13932.3	1733.6	391.9	411.7	431.4	636007.7	3.72	3.42	W840X576	
140-1896	IZ	260.9	74.6	78.9	84.1	89.3	4931.1	13.32	12.27	W36X393	D3
		14028.9	1896.0	385.1	410.4	435.8	673387.7	4.06	3.74	W920X585	
141-2092	IZ	262.4	82.4	72.8	77.8	82.8	5372.8	13.32	12.27	W40X397	C3
		14109.6	2092.4	355.5	379.9	404.2	733701.7	4.06	3.74	W1000X591	
142-1877	IZ	264.3	73.9	76.2	81.5	86.7	5368.9	13.32	12.27	W40X372	D3
		14208.8	1877.0	372.2	397.9	423.5	733175.1	4.06	3.74	W1000X554	
143-2070	IZ	265.5	81.5	94.3	99.4	104.4	4316.7	13.32	12.27	W27X539	C3
		14273.1	2070.4	460.6	485.2	509.8	589479.5	4.06	3.74	W690X802	
143-1783	IZ	265.6	70.2	78.9	82.8	86.7	5521.3	12.2	11.22	W40X392	D1
		14280.0	1783.0	385.0	404.2	423.4	753984.8	3.72	3.42	W1000X584	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
144-2114	IZ	267.9	83.2	78.1	83.0	87.9	5125.3	13.32	12.27	W36X439	C3
		14401.4	2114.4	381.2	405.3	429.4	699906.9	4.06	3.74	W920X653	
145-1851	IZ	270.3	72.9	76.9	81.0	85.1	5619.6	12.2	11.22	W40X392	C2
		14534.3	1851.0	375.4	395.4	415.4	767412.0	3.72	3.42	W1000X584	
146-1878	IZ	271.1	73.9	75.6	79.4	83.1	5549.9	12.2	11.22	W40X397	D1
		14574.9	1878.0	369.3	387.5	405.7	757893.8	3.72	3.42	W1000X591	
146-1728	IZ	271.6	68.0	71.2	75.2	79.3	5978.0	12.2	11.22	W44X335	D2
		14603.6	1727.6	347.4	367.2	387.0	816343.9	3.72	3.42	W1100X499	
146-2095	IZ	271.7	82.5	73.6	77.2	80.8	5604.4	12.2	11.22	W40X431	C1
		14605.6	2095.4	359.4	377.0	394.7	765331.9	3.72	3.42	W1000X642	
147-1856	IZ	273.0	73.1	99.7	103.4	107.2	4439.3	12.2	11.22	W27X539	D1
		14678.7	1856.0	486.6	505.0	523.5	606231.1	3.72	3.42	W690X802	
147-1730	IZ	273.0	68.1	76.0	80.0	84.1	5536.0	12.2	11.22	W40X362	D2
		14679.5	1729.6	371.1	390.8	410.6	755996.1	3.72	3.42	W1000X539	
147-1750	IZ	274.3	68.9	80.6	84.6	88.6	5182.7	12.2	11.22	W36X393	D2
		14744.7	1749.6	393.3	412.8	432.3	707746.8	3.72	3.42	W920X585	
148-1946	IZ	275.1	76.6	73.9	77.8	81.7	5632.2	12.2	11.22	W40X397	C2
		14791.0	1946.0	360.7	379.7	398.7	769130.3	3.72	3.42	W1000X591	
149-1783	IZ	276.2	70.2	83.7	89.2	94.7	5740.6	13.32	12.27	W40X392	D3
		14847.1	1783.0	408.6	435.6	462.6	783929.0	4.06	3.74	W1000X584	
149-1924	IZ	276.7	75.7	97.0	101.0	104.9	4498.7	12.2	11.22	W27X539	C2
		14875.0	1924.0	473.8	493.0	512.2	614339.1	3.72	3.42	W690X802	
149-1900	IZ	276.8	74.8	81.5	85.1	88.8	5295.8	12.2	11.22	W36X439	D1
		14880.4	1900.0	397.7	415.7	433.7	723189.7	3.72	3.42	W920X653	
150-1731	IZ	278.6	68.1	77.7	81.8	85.8	5660.3	12.2	11.22	W40X372	D2
		14980.0	1730.6	379.5	399.2	419.0	772969.2	3.72	3.42	W1000X554	
151-1968	IZ	280.3	77.5	79.5	83.4	87.2	5363.4	12.2	11.22	W36X439	C2
		15070.5	1968.0	388.2	407.0	425.8	732425.4	3.72	3.42	W920X653	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in³/ft (cm³/m)	in (mm)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	lb/ft² (kg/m²)	in⁴/ft (cm⁴/m)	ft²/ft (m²/m)	ft²/ft (m²/m)	in (mm)	
151-2095	IZ	280.7	82.5	77.7	82.7	87.7	5791.0	13.32	12.27	W40X431	C3
		15091.8	2095.4	379.4	403.7	428.0	790811.5	4.06	3.74	W1000X642	
151-1878	IZ	281.3	73.9	80.2	85.5	90.7	5758.1	13.32	12.27	W40X397	D3
		15121.6	1878.0	391.7	417.3	442.9	786323.3	4.06	3.74	W1000X591	
154-1856	IZ	286.0	73.1	104.3	109.6	114.9	4650.0	13.32	12.27	W27X539	D3
		15375.2	1856.0	509.2	535.2	561.1	634997.6	4.06	3.74	W690X802	
155-1900	IZ	287.5	74.8	86.0	91.2	96.4	5501.6	13.32	12.27	W36X439	D3
		15458.6	1900.0	419.8	445.1	470.5	751290.1	4.06	3.74	W920X653	
157-1881	IZ	291.3	74.1	81.1	84.8	88.5	6010.3	12.2	11.22	W40X431	D1
		15663.3	1881.0	395.9	414.0	432.2	820758.4	3.72	3.42	W1000X642	
157-1637	IZ	292.6	64.4	85.9	90.2	94.5	6082.0	12.2	11.22	W40X392	D2
		15730.1	1636.6	419.5	440.4	461.2	830549.0	3.72	3.42	W1000X584	
159-1949	IZ	294.8	76.7	79.1	83.0	86.9	6081.4	12.2	11.22	W40X431	C2
		15848.8	1949.0	386.4	405.3	424.3	830475.3	3.72	3.42	W1000X642	
160-1732	IZ	297.1	68.2	82.0	86.1	90.1	6082.3	12.2	11.22	W40X397	D2
		15972.8	1731.6	400.6	420.3	440.0	830588.0	3.72	3.42	W1000X591	
162-1710	IZ	300.3	67.3	108.2	112.3	116.4	4883.4	12.2	11.22	W27X539	D2
		16147.0	1709.6	528.3	548.3	568.3	666873.1	3.72	3.42	W690X802	
162-1881	IZ	301.4	74.1	85.6	90.9	96.1	6218.1	13.32	12.27	W40X431	D3
		16205.0	1881.0	418.2	443.8	469.4	849142.6	4.06	3.74	W1000X642	
163-1754	IZ	303.1	69.0	88.3	92.2	96.2	5800.2	12.2	11.22	W36X439	D2
		16297.8	1753.6	430.9	450.4	469.9	792074.6	3.72	3.42	W920X653	
164-2120	IZ	305.0	83.5	86.4	90.0	93.5	5980.7	12.2	11.22	W36X527	C1
		16400.1	2120.4	421.8	439.2	456.6	816723.9	3.72	3.42	W920X784	
168-2100	IZ	313.2	82.7	83.9	87.5	91.1	6583.8	12.2	11.22	W40X503	C1
		16836.6	2100.4	409.7	427.3	444.9	899072.0	3.72	3.42	W1000X748	
169-2120	IZ	314.4	83.5	90.4	95.4	100.3	6165.1	13.32	12.27	W36X527	C3
		16905.7	2120.4	441.6	465.6	489.6	841903.1	4.06	3.74	W920X784	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
172-1735	IZ	319.0	68.3	87.9	92.0	96.0	6580.6	12.2	11.22	W40X431	D2
		17149.5	1734.6	429.3	449.0	468.7	898632.7	3.72	3.42	W1000X642	
173-2100	IZ	322.0	82.7	88.0	93.0	97.9	6769.9	13.32	12.27	W40X503	C3
		17312.6	2100.4	429.7	453.9	478.2	924490.9	4.06	3.74	W1000X748	
177-1906	IZ	328.3	75.0	95.2	98.9	102.5	6437.4	12.2	11.22	W36X527	D1
		17652.2	1906.0	464.8	482.7	500.7	879080.3	3.72	3.42	W920X784	
178-1974	IZ	330.5	77.7	92.8	96.6	100.5	6479.7	12.2	11.22	W36X527	C2
		17768.1	1974.0	453.1	471.8	490.5	884853.8	3.72	3.42	W920X784	
181-1886	IZ	337.1	74.3	92.5	96.3	100.0	7086.5	12.2	11.22	W40X503	D1
		18122.2	1886.0	451.8	470.0	488.1	967727.7	3.72	3.42	W1000X748	
182-1906	IZ	338.8	75.0	99.7	104.9	110.1	6642.5	13.32	12.27	W36X527	D3
		18214.7	1906.0	486.8	512.1	537.3	907092.2	4.06	3.74	W920X784	
182-1954	IZ	339.3	76.9	90.2	94.1	98.0	7133.0	12.2	11.22	W40X503	C2
		18241.0	1954.0	440.4	459.3	478.2	974069.0	3.72	3.42	W1000X748	
187-1886	IZ	346.9	74.3	97.1	102.3	107.6	7293.8	13.32	12.27	W40X503	D3
		18652.4	1886.0	474.1	499.6	525.1	996036.6	4.06	3.74	W1000X748	
193-1760	IZ	358.8	69.3	103.1	107.1	111.1	7035.1	12.2	11.22	W36X527	D2
		19291.2	1759.6	503.5	522.9	542.3	960700.6	3.72	3.42	W920X784	
197-2107	IZ	366.0	83.0	97.0	100.6	104.2	7867.7	12.2	11.22	W40X593	C1
		19677.8	2107.4	473.5	491.1	508.6	1074408.6	3.72	3.42	W1000X883	
198-1740	IZ	368.4	68.5	100.3	104.4	108.4	7745.7	12.2	11.22	W40X503	D2
		19808.0	1739.6	489.9	509.5	529.1	1057746.8	3.72	3.42	W1000X748	
199-2129	IZ	370.3	83.8	103.5	107.1	110.6	7493.5	12.2	11.22	W36X650	C1
		19908.7	2129.4	505.5	522.9	540.2	1023307.3	3.72	3.42	W920X967	
201-2107	IZ	374.6	83.0	101.1	106.0	111.0	8053.3	13.32	12.27	W40X593	C3
		20141.8	2107.4	493.4	517.6	541.8	1099743.2	4.06	3.74	W1000X883	
204-2129	IZ	379.4	83.8	107.6	112.5	117.4	7677.1	13.32	12.27	W36X650	C3
		20396.5	2129.4	525.2	549.1	573.1	1048380.1	4.06	3.74	W920X967	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.

Section	Solution Type	Section Modulus	Width	Weight at Ratio			Moment of Inertia	Coating Area		Diameter	Configuration
				60%	80%	100%		Front	Front & Back		
		in ³ /ft (cm ³ /m)	in (mm)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	lb/ft ² (kg/m ²)	in ⁴ /ft (cm ⁴ /m)	ft ² /ft (m ² /m)	ft ² /ft (m ² /m)	in (mm)	
213-1893	IZ	395.3	74.5	107.1	110.8	114.5	8497.8	12.2	11.22	W40X593	D1
		21253.8	1893.0	522.7	540.8	558.8	1160455.4	3.72	3.42	W1000X883	
213-1961	IZ	395.9	77.2	104.2	108.1	112.0	8510.8	12.2	11.22	W40X593	C2
		21286.2	1961.0	508.9	527.7	546.6	1162227.8	3.72	3.42	W1000X883	
215-1915	IZ	400.1	75.4	114.2	117.9	121.5	8097.2	12.2	11.22	W36X650	D1
		21512.5	1915.0	557.7	575.6	593.4	1105742.3	3.72	3.42	W920X967	
215-1983	IZ	400.4	78.1	111.2	115.0	118.8	8101.9	12.2	11.22	W36X650	C2
		21524.9	1983.0	542.8	561.5	580.1	1106379.5	3.72	3.42	W920X967	
218-1893	IZ	404.9	74.5	111.6	116.8	122.0	8704.4	13.32	12.27	W40X593	D3
		21770.3	1893.0	544.9	570.3	595.8	1188659.7	4.06	3.74	W1000X883	
221-1915	IZ	410.2	75.4	118.7	123.9	129.0	8301.3	13.32	12.27	W36X650	D3
		22054.9	1915.0	579.6	604.8	629.9	1133622.5	4.06	3.74	W920X967	
232-1747	IZ	431.4	68.8	116.0	120.0	124.1	9272.7	12.2	11.22	W40X593	D2
		23191.7	1746.6	566.6	586.1	605.7	1266268.4	3.72	3.42	W1000X883	
235-1769	IZ	436.3	69.6	123.7	127.6	131.6	8829.2	12.2	11.22	W36X650	D2
		23457.4	1768.6	603.9	623.2	642.5	1205709.9	3.72	3.42	W920X967	
243-2140	IZ	451.3	84.3	124.0	127.6	131.1	9469.8	12.2	11.22	W36X798	C1
		24262.4	2140.4	605.6	622.9	640.1	1293185.1	3.72	3.42	W920X1188	
247-2140	IZ	460.0	84.3	128.1	132.9	137.8	9652.5	13.32	12.27	W36X798	C3
		24730.4	2140.4	625.2	649.0	672.8	1318129.0	4.06	3.74	W920X1188	
262-1994	IZ	487.0	78.5	133.1	136.9	140.7	10219.9	12.2	11.22	W36X798	C2
		26184.1	1994.0	650.1	668.6	687.1	1395613.5	3.72	3.42	W920X1188	
263-1926	IZ	489.2	75.8	137.0	140.6	144.2	10265.2	12.2	11.22	W36X798	D1
		26300.2	1926.0	668.7	686.4	704.1	1401800.0	3.72	3.42	W920X1188	
268-1926	IZ	498.9	75.8	141.4	146.5	151.7	10468.2	13.32	12.27	W36X798	D3
		26820.3	1926.0	690.4	715.4	740.4	1429521.0	4.06	3.74	W920X1188	
286-1780	IZ	532.4	70.1	148.2	152.2	156.1	11171.0	12.2	11.22	W36X798	D2
		28621.1	1779.6	723.7	742.9	762.1	1525505.5	3.72	3.42	W920X1188	

* Length of the intermediate section as percent of the outer section length(s), intermediate sheet pile length is typically 60% to 80% of the length of the outer sections or IZ Pile.