THE KENSINGTON ENTRANCE CANOPY
Data Sheet



The Kensington is a steel wall mounted entrance canopy with an ultra-modern design which incorporates stylish steel support rods to create a cantilevered canopy.

able canopies
a PALRAM company

0800 389 9072
www.ablecanopies.co.uk
sales@ablecanopies.co.uk

Dimensions:

Length:	Unlimited
Width:	Up to 2.5 metres
Height:	To your specification
Spacing Between Fixings:	2 metres

Features:

Wall Mounted or Freestanding:	Wall Mounted (This canopy can only be fixed into steel beams or solid concrete)
Suitable for:	Education | Hospitality | Leisure | Retail | Commercial | Healthcare
Guarantee:	N/A
Life Expectancy:	Up to 25 Years
Maintenance:	Requires only periodic cleaning
Installation Type:	Permanent
Retractable/Collapsible:	No
Method of Fixing:	Fixed to the wall with steel wall brackets and stainless steel support rods

Frame Specifications:

Construction Material:	Roof arms are made from 50mm x 25mm x 3mm steel hollow Section Front beam is made from 100m x 100mm x 4mm Steel box Section
Guttering:	Aluminium box gutter along the rear of the canopy
Frame Finish:	Powder coated Also available galvanised at an additional cost
Colour Options:	Supplied in any standard RAL colour Other RAL colours are available however, they may incur additional costs
Fixings:	316 marine grade stainless steel fixings

Roof Specifications:

Roof Frame:	Steel roof bars with aluminium rafter bars
Roof Covering:	Choice of 10mm solid polycarbonate, 16mm structured polycarbonate, 10mm toughened glass or 10.8mm laminated glass
UV Protection:	Over 98% for polycarbonate panels
Light Transmission:	The 16mm polycarbonate offers 73% for clear panels and 35% for opal panels The 5mm polycarbonate offers 92% for clear panels and 47% for opal panels
Strength:	The polycarbonate is vandal and shatter resistant and 200 times stronger than glass
Colour Options:	The polycarbonate is available in clear and opal, the glass is available in clear
Temperature Resistance:	From –20°c to +100°c for the polycarbonate

International Standards:

Fire Ratings:	16mm structured polycarbonate panels: Classified as B-s1, d0 and B-s2, d0 in accordance with EN 13501-1.
CE Marked	Yes to UKCA BS EN1090-1:2009+A1:2011

Colour Options:

	Standard Colours	Non Standard Colours (Additional costs may apply)
Steel Framework	Our standard RAL colours are: 9910 3000 1023 6018 6005 9005 7016 7012 70 1 5015 5005	Any RAL colour
Polycarbonate Roof Covering	Clear Opal, 9910	N/A
Glass Roof Covering	9910	N/A


Weather Protection:



Available Upgrades:

Post Pads	×
Signage	×
Polycarbonate Side & Front Fills	×
Tensile Fabric Side Panels	×
Rainbow Package	×
Roller Shutters	×
Coloured Polycarbonate	✓



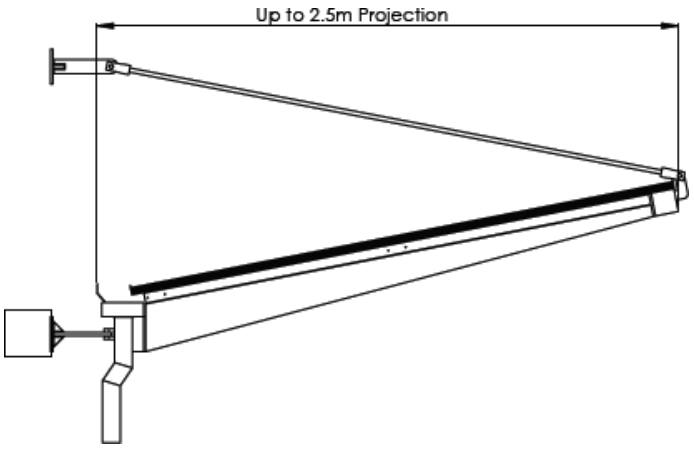

Technical Files Available:

PDF CAD File	✓
DXF CAD File	✓
IGES CAD File	✓
STL CAD File	✓
BIM File	✓
NBS Spec	✓

0800 389 9072

www.ablecanopies.co.uk

sales@ablecanopies.co.uk

9-11 Faraday Close, Gorse Lane Industrial Estate, Clacton on Sea, Essex CO15 4TR