THE ULLSWATER APEX CANOPY

Data Sheet



The Ullswater Apex is a strong freestanding canopy thar can be used as a freestanding canopy, entrance canopy or external covered walkway.

Dimensions:

Length:	Unlimited
Width:	Up to 6 metres
Height:	2.8m at apex (as standard)
Spacing Between Posts:	Up to 6 metres

0800 389 9072
www.ablecanopies.co.uk
sales@ablecanopies.co.uk

Features:

Wall Mounted or Freestanding:	Freestanding
Suitable for:	Education | Hospitality | Leisure | Retail | Commercial | Healthcare
Guarantee:	N/A
Life Expectancy:	Up to 25 Years
Maintenance:	Requires only periodic cleaning
Installation Type:	Permanent
Retractable/Collapsible:	No
Method of Fixing:	Posts are installed into the ground with 300mm x 300mm x 10mm steel base plates into 600mm x 600mm x 600mm pad stones into the ground - the size of the pad stones can vary depending on site specifics

Frame Specifications:

Construction Material:	120mm x 60mm x 3.6mm steel box section
Guttering:	Deep flow guttering with uPVC downpipes fitted as standard
Frame Finish:	Powder coated Also available galvanised at an additional cost
Colour Options:	Supplied in any standard RAL colour Other RAL colours are available however, they may incur additional costs
Fixings:	316 marine grade stainless steel fixings

Roof Specifications:

Roof Frame:	Fully aluminium roof frame including aluminium roof bars
Roof Covering:	35mm structured polycarbonate panels
UV Protection:	Over 98% | This also means the roof panels will not turn yellow over time due to UV degradation
Light Transmission:	The polycarbonate offers 63% for clear panels and 31% for opal panels
Strength:	Vandal and shatter resistant | 200 times stronger than glass
Colour Options:	Available in clear and opal
Temperature Resistance:	From –20°c to +100°c

International Standards:

Fire Ratings:	Roof panels: Classified as B-s1, d0 and B-s2, d0 in accordance with EN 13501-1
CE Marked	Yes to UKCA BS EN1090-1:2009+A1:2011

Colour Options:

	Standard Colours	Non Standard Colours (Additional costs may apply)
Steel Framework	Our standard RAL colours are: 9910 3000 1023 6018 6005 9005 7016 7012 7001 5015 5005	Any RAL colour
Aluminium Roof Bars	9910	Any RAL colour
Polycarbonate Roof Covering	Clear Opal 9910	N/A

Weather Protection:

UV


Available Upgrades:

Post Pads	✓
Signage	✓
Polycarbonate Side & Front Fills	✓
Tensile Fabric Side Panels	×
Rainbow Package	✓
Roller Shutters	✓
Coloured Polycarbonate	×
Guttering and uPVC downpipes	*N/A supplied as standard*
Gable Ends	✓

Technical Files Available:

PDF CAD File	✓
DXF CAD File	✓
IGES CAD File	✓
STL CAD File	✓
BIM File	✓
NBS Spec	✓



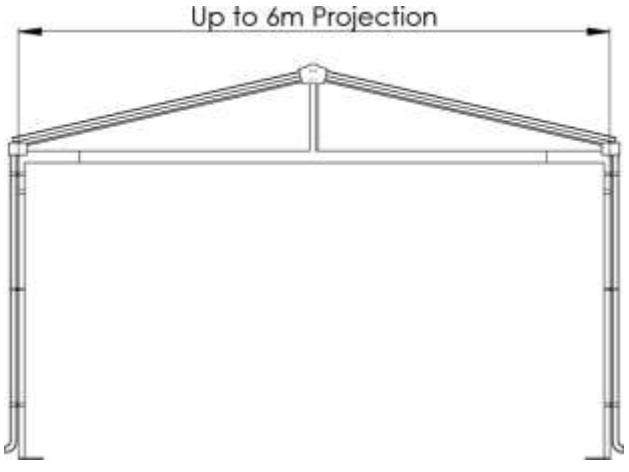

0800 389 9072
www.ablecanopies.co.uk
9-11 Faraday Close, Gorse Lane Industrial Estate, Clacton on Sea, Essex CO15 4TR
sales@ablecanopies.co.uk