

# THE ULVERSTON UMBRELLA Data Sheet

The Ulverston umbrella provides a permanent tough structure in the shape of a traditional umbrella which is supported by a tubular steel post.



0800 389 9072

[www.ablecanopies.co.uk](http://www.ablecanopies.co.uk)  
[sales@ablecanopies.co.uk](mailto:sales@ablecanopies.co.uk)

## Dimensions:

Length:	Choice of 3m, 4m, 5m & 6m
Width/Projection:	Choice of 3m, 4m, 5m & 6m
Height:	Up to 3.5m
Spacing Between Posts:	N/A

## Features:

Wall Mounted or Freestanding:	Freestanding
Suitable for:	Education   Hospitality   Leisure   Retail   Commercial   Healthcare
Guarantee:	5 years for the fabric
Life Expectancy:	Up to 25 years for the frame and 15 years for the fabric
Maintenance:	Requires only periodic cleaning
Installation Type:	Permanent
Retractable/Collapsible:	No
Method of Fixing:	The centre post is installed into the ground with a 550mm x 550mm x 15mm steel base plate which is fixed to pad stones, the size of which depends on the location

## Frame Specifications:

Construction Material:	The main frame is 219mm x 6mm steel tube section
Guttering:	N/A
Frame Finish:	Powder coated Also available galvanised at an additional cost
Colour Options:	Supplied in any standard RAL colour Other RAL colours are available however, they may incur additional costs
Fixings:	316 marine grade stainless steel fixings

## Roof Specifications:

Roof Frame:	Roof bars are 76.10mm x 4mm steel tube section and the top section is 193.7mm x 4mm
Roof Covering:	1100 dtex PES HT waterproof tensile fabric with a weight of 590 g/sqm
UV Protection:	Up to 98% depending on the colour chosen
Light Transmission:	The amount of light transmittance depends on the colour chosen, it varies from 17% - 78%
Tensile Strength:	The tensile fabric has a strength of 250/250 da N/5 cm
Colour Options:	Available in a range of colours as shown overleaf
Temperature Resistance:	TBC

## International Standards:

**Fire Ratings:** Tensile fabric: European standard B-s2,d0/EN 13501-1

**Strength Tests:** Tensile strength: 250/250 daN/5cm | European standard EN ISO 1421  
Tear strength: 25/20 daN | European standard DIN 53.363

**CE Marked** Yes to UKCA BS EN1090-1:2009+A1:2011

## Colour Options:

	Standard Colours	Non Standard Colours (Additional costs may apply)
<b>Framework</b>	<p>Our standard RAL colours are:</p>  <p>9910 3000 1023 6018 6005 9005 7016 7012 7001 5015 5005</p>	Any RAL colour
<b>Tensile Roof Covering</b>	 <p>Aniseed M Green T Green Spruce P Green Celadon S Blue Lagoon T Blue C Blue D Blue M Blue Marine Concrete Boulder Black Orange Dijon Terracotta Carrot Burgundy Raspberry Walnut Stain Cocoa Teak Olive Pepper Camel Vanilla Hemp White Sandy Beige Lemon V Blue Poppy Buttercup Champagne</p>	N/A

## Available Upgrades:


Post Pads	✓
Signage	✗
Polycarbonate Side & Front Fills	✗
Tensile Fabric Side Panels	✗
Rainbow Package	✗
Roller Shutters	✗

## Weather Protection:



## Technical Files Available:

PDF CAD File	✓
DXF CAD File	✓
IGES CAD File	✓
STL CAD File	✓
BIM File	✓
NBS Spec	✓

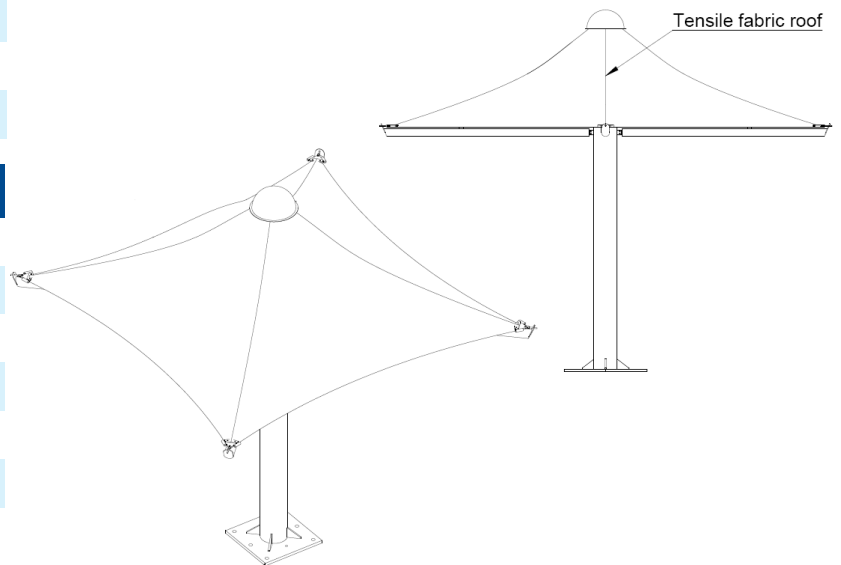

0800 389 9072

[www.ablecanopies.co.uk](http://www.ablecanopies.co.uk)

[sales@ablecanopies.co.uk](mailto:sales@ablecanopies.co.uk)

9-11 Faraday Close, Gorse Lane Industrial Estate, Clacton on Sea, Essex CO15 4TR

V1.6 LU310725