


IXGW-LC-RY20

Network Door Release Relay for IXG-DM7-HID(A)

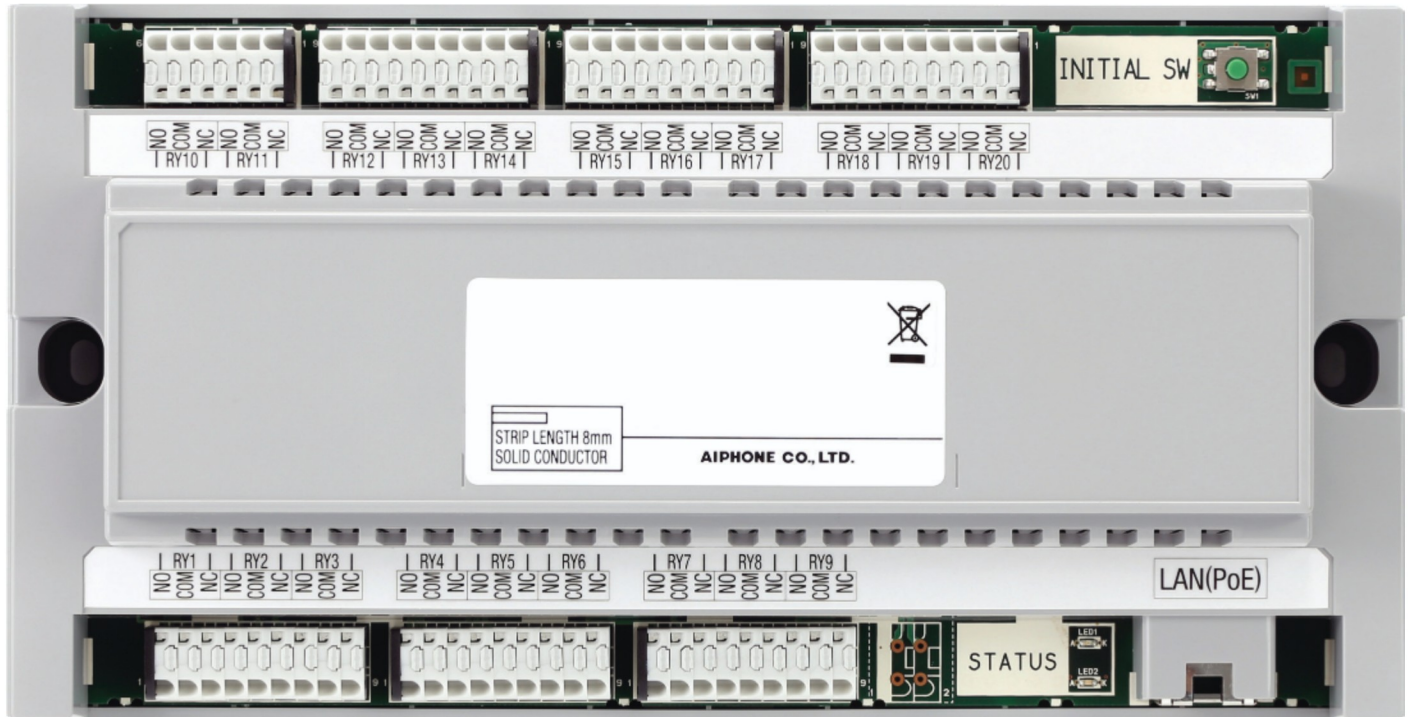

DESCRIPTION

The IXGW-LC-RY20 is a door release relay for the IX | IXG Series IP Video Intercom system. It is compatible with IXG-DM7-HID(A) entrance panels. It has 20 Form C relays and up to 16 adaptors can be included in a building.

This adaptor is designed to integrate with an access control system or elevator control system. The relays can be configured to trigger based on which unit is called or which tenant takes out an action. These relays enable features like unlocking a door for a visitor, granting access to particular floors once they enter the elevator, and summoning the elevator to a tenant's floor.

The adaptor is surface mounted directly to the wall through the mounting points on either side, or it can be mounted on a standard, 35mm x 170mm DIN rail. The DIN rail is included with the station. Wire terminations connect directly to the inputs and outputs on the station.


FEATURES

- PoE compliant (IEEE 802.3af class 0)
- 20 Form C relays
- Relay rating (24V AC/DC, 500mA)
- 16 adaptors per building
- DIN rail or wall mountable

IXGW-LC-RY20

Network Door Release Relay for IXG-DM7-HID(A)

FEATURE CALL-OUT

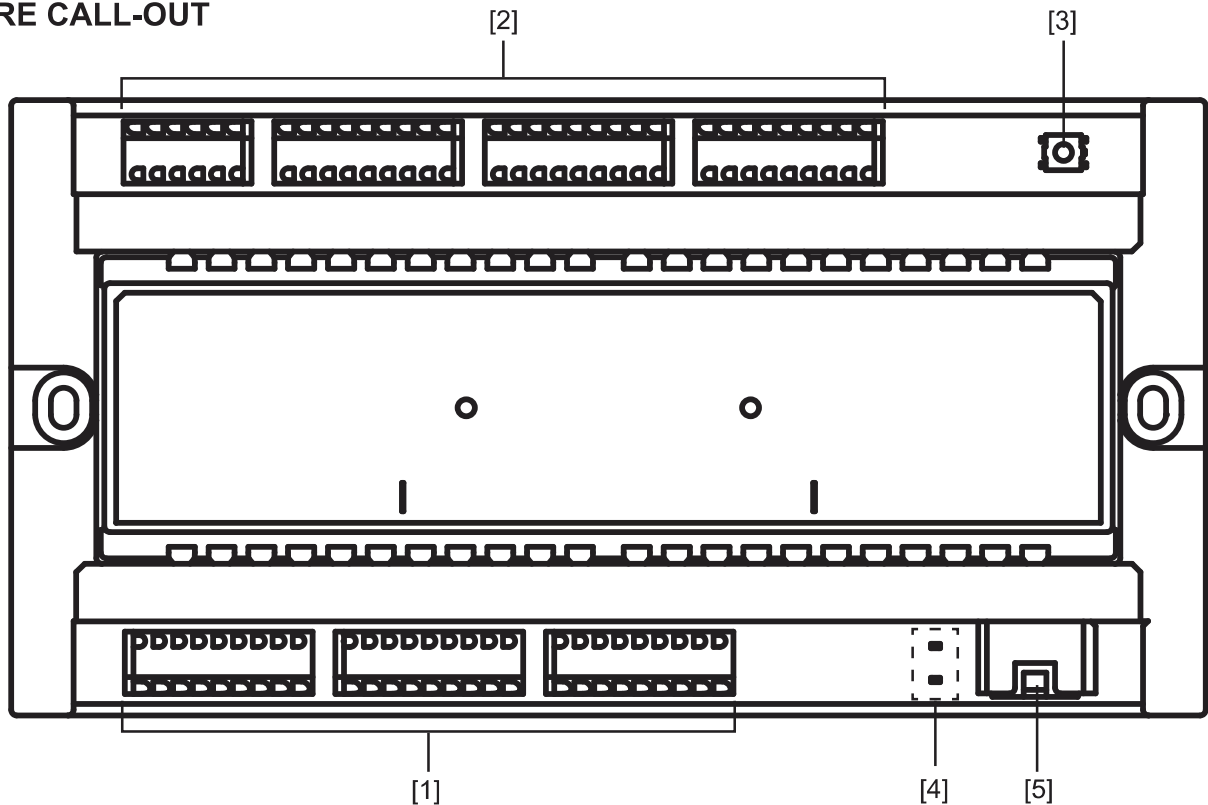

FEATURE CALL-OUT DEFINITIONS

- [1] Relays 1-9
- [2] Relays 10-20
- [3] Reset button
- [4] Status indicators (orange/green)
- [5] LAN port (PoE)

SPECIFICATIONS

- Power Source: PoE
- Consumption: 2.1W standby, 4.4W max.
- LAN: Ethernet (10BASE-T, 100BASE-TX)
- Packet Delivery: Unicast, Multicast
- Protocol: IPv4/v6, TCP, UDP, HTTP, HTTPS, IGMP, MLD, SFTP, DHCP, NTP, DNS, TLS
- Encryption: TLS 1.2
- Operating Temp: 14° ~ 122°F (-10° ~ 50°C)
- Dimensions: 4-1/4" H x 8-1/4" W x 2-3/8" D
- Din Rail Mount: 35mm W x 170mm L (included)